



A


輸出端(output)

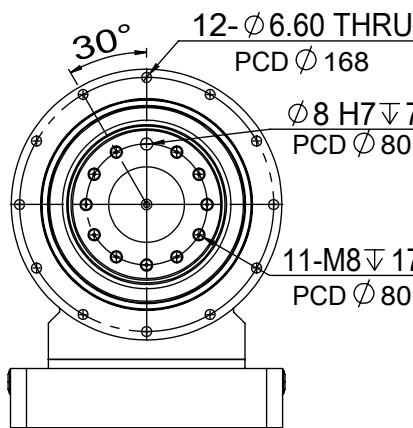

B

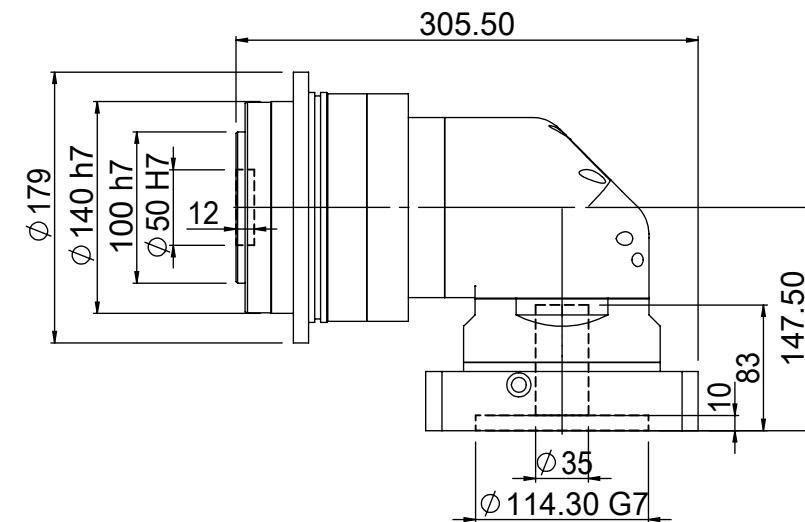

輸入端(input)

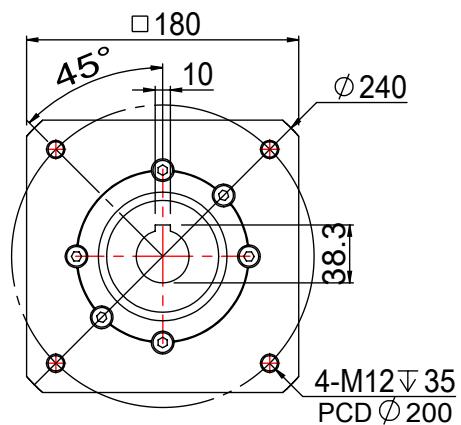

C

急停扭矩 (Emergency Stop Torque)	3倍額定輸出力矩 (3 times rated output torque)	
額定輸入轉速 (Rated input speed)	3000rpm	
最大輸入轉速 (Maximum input speed)	6000rpm	
背隙 (Dorsal gap)	P1	\leq 5arcmin
	P2	\leq 8arcmin
最大彎曲力矩 (maxi bending torque)	1300Nm	
容許軸向力 (Allowable axial force)	10590N	
使用壽命 (Service life)	20000hr	
效率 (Efficiency)	\geq 94%	
使用溫度範圍 (Operating temperature range)	-10°C~90°C	
防護等級 (protection class)	IP65	
噪音值 (Noise value)	\leq 65dB	
安裝方式 (Installation DIRECTION)	任意(Arbitrarily)	

減速比 (Speed ratio)	20	25	35	40	50	70	100
額定輸出力矩 (Rated output torque)	560Nm	650Nm	550Nm	560Nm	650Nm	550Nm	450Nm

改版 SYM	年月日 DATE	變更事項 REVISIONS	設計 BY	備注 NOTE
---	2018-12-26	00初版	陳國棟	

制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer
		規格: SPEC	GPDR140-L2-(35-114.3-200-M12)
G+® 吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd			A4