

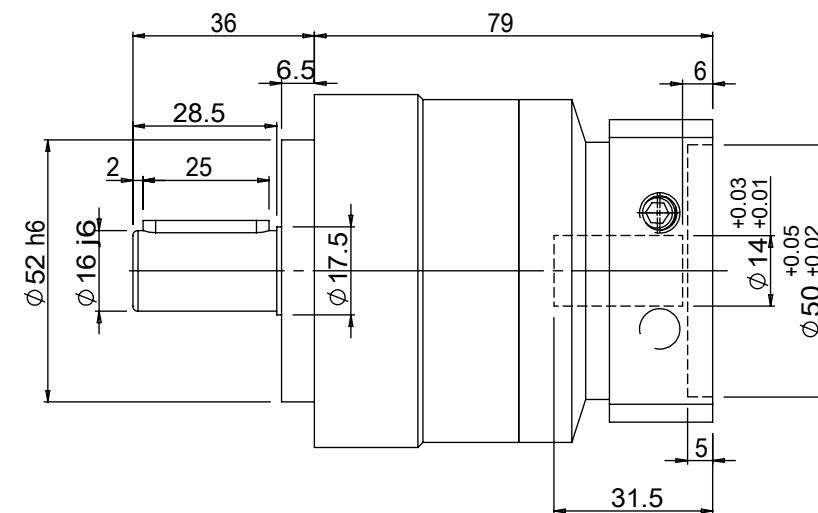


A

輸出端(output)

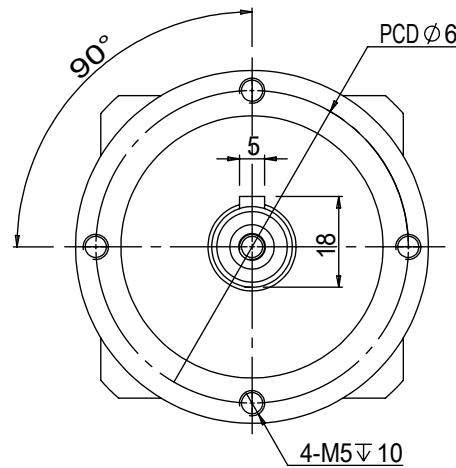

輸入端(input)

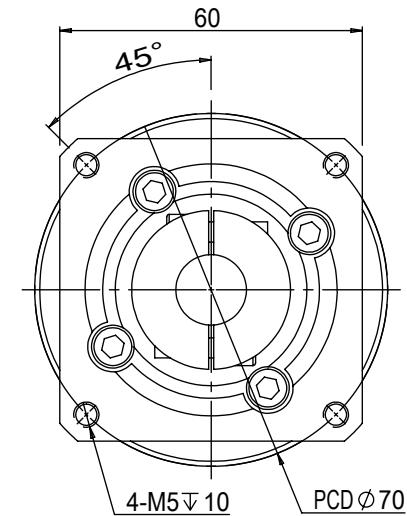

B

A

C

B

C

急停扭矩 (Emergency Stop Torque)	3倍額定輸出力矩 (3 times rated output torque)	
額定輸入轉速 (Rated input speed)	5000rpm	
最大輸入轉速 (Maximum input speed)	10000rpm	
背隙 (Dorsal gap)	P1	$\leq 3\text{arcmin}$
	P2	$\leq 5\text{arcmin}$
容許徑向力 (Allowable radial force)	1530N	
容許軸向力 (Allowable axial force)	765N	
使用壽命 (Service life)	20000hr	
效率 (Efficiency)	$\geq 97\%$	
使用溫度範圍 (Operating temperature range)	-10°C ~ 90°C	
防護等級 (protection class)	IP65	
噪音值 (Noise value)	$\leq 58\text{dB}$	
安裝方式 (Installation DIRECTION)	任意(Arbitrarily)	

減速比 (Speed ratio)	3	4	5	7	10
額定輸出力矩 (Rated output torque)	55Nm	50Nm	60Nm	50Nm	40Nm

---	2018-12-26	00初版	陳國棟	
改版 SYM	年月日 DATE	變更事項 REVISIONS	設計 BY	備注 NOTE

制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer
		規格: SPEC	GPE070-L1-(14-50-70-M5)
 吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd			A4