

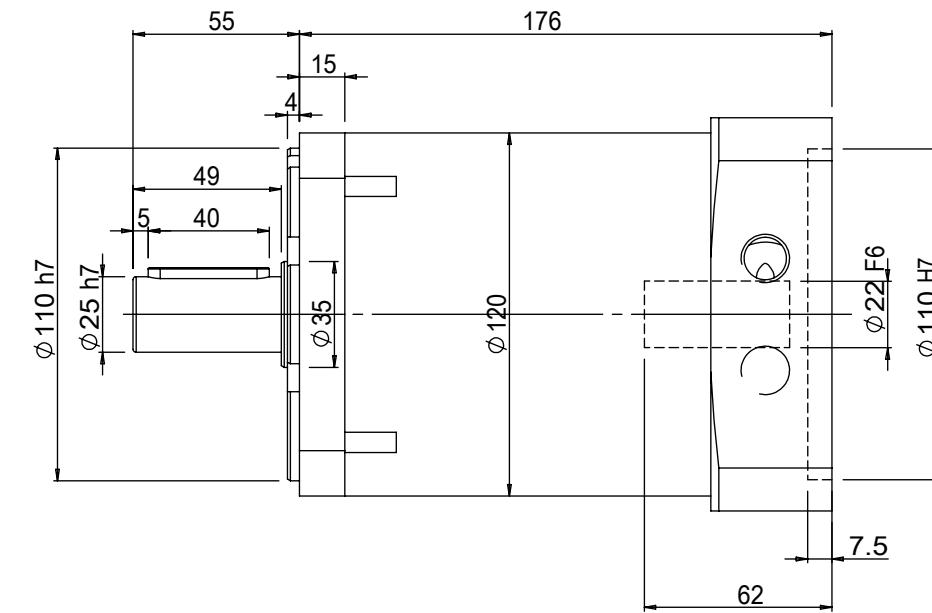


A

輸出端(output)

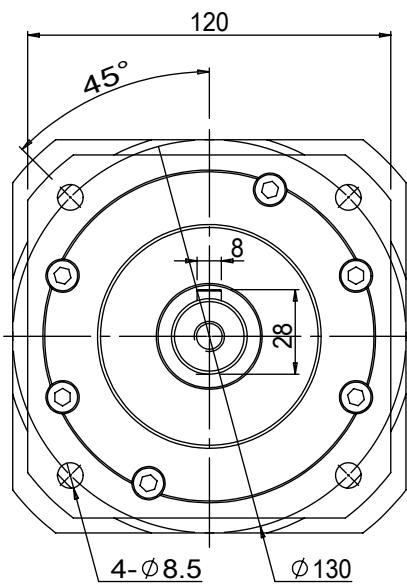

輸入端(input)

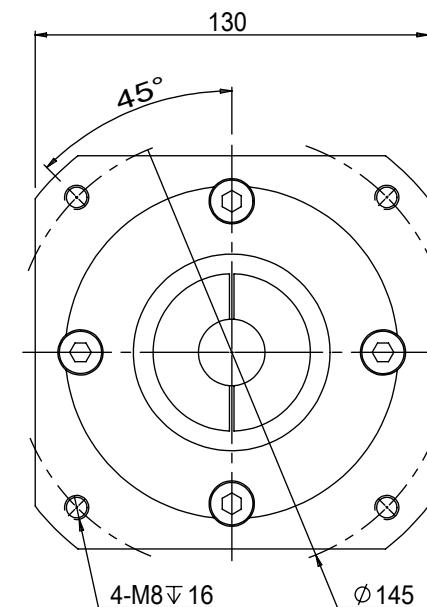

B

急停扭矩 (Emergency Stop Torque)	2倍額定輸出力矩 (2 times rated output torque)	
額定輸入轉速 (Rated input speed)	3000rpm	
最大輸入轉速 (Maximum input speed)	5000rpm	
背隙 (Dorsal gap)	P2	$\leq 10\text{arcmin}$
容許徑向力 (Allowable radial force)	2600N	
容許軸向力 (Allowable axial force)	2100N	
使用壽命 (Service life)	20000hr	
效率 (Efficiency)	$\geq 94\%$	
使用溫度範圍 (Operating temperature range)	-25°C ~ 90°C	
防護等級 (protection class)	IP65	
安裝方式 (Installation DIRECTION)	任意(Arbitrarily)	

A

B

C

減速比 (Speed ratio)	12	16	20	25	28	35	40	50	70
額定輸出力矩 (Rated output torque)	250Nm	250Nm	250Nm	270Nm	250Nm	270Nm	250Nm	270Nm	180Nm

---	2018-12-26	00初版	陳國棟	
改版 SYM	年月日 DATE	變更事項 REVISIONS	設計 BY	備注 NOTE

制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer
		規格: SPEC	GPF115-L2-(22-110-145-M8)
 吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd			A4