
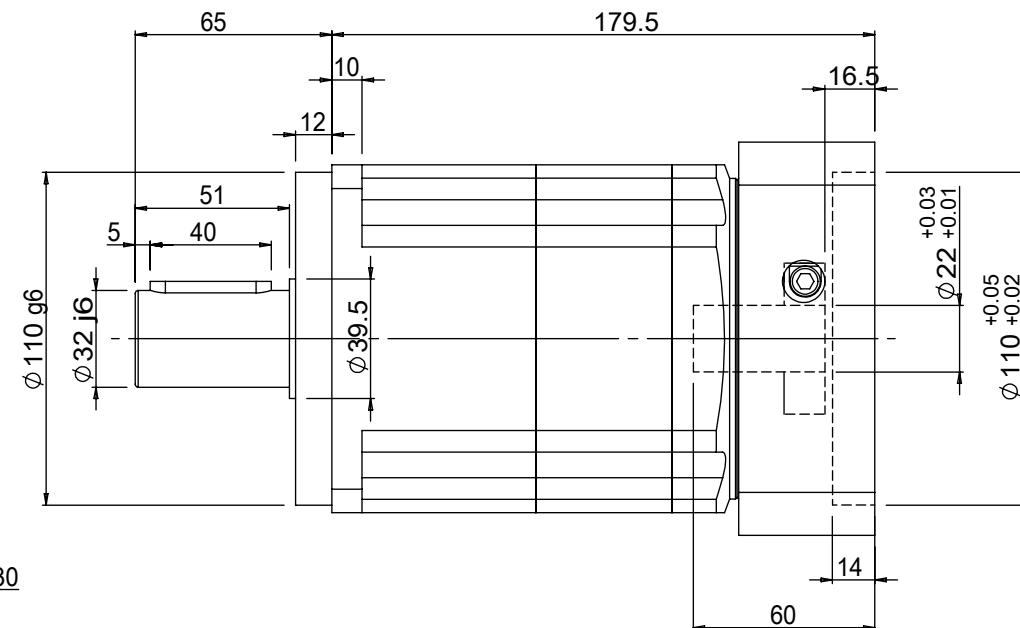
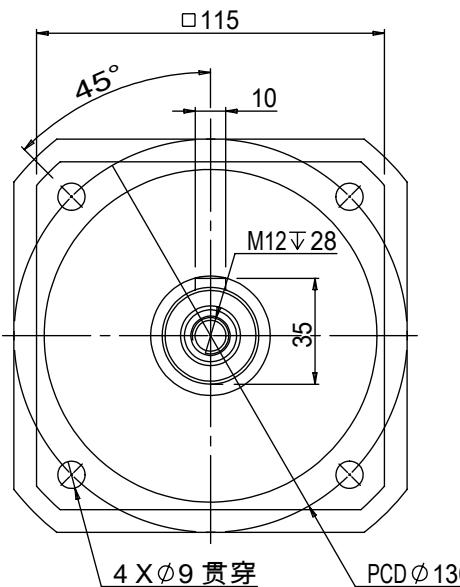


輸出端(output)

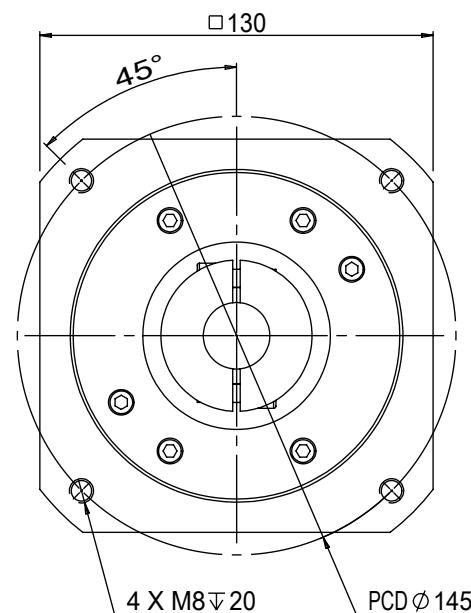

輸入端(input)

急停扭矩  
(Emergency Stop Torque)3倍額定輸出力矩  
(3 times rated output torque)額定輸入轉速  
(Rated input speed)

4000rpm

最大輸入轉速  
(Maximum input speed)

8000rpm

背隙  
(Dorsal gap)P1 \leq 5arcmin  
P2 \leq 8arcmin容許徑向力  
(Allowable radial force)

6700N

容許軸向力  
(Allowable axial force)

3350N

使用壽命  
(Service life)

20000hr

效率  
(Efficiency)

\geq 94%

使用溫度範圍  
(Operating temperature range)

-10°C ~ 90°C

防護等級  
(protection class)

IP65

噪音值  
(Noise value)

\leq 63dB

安裝方式  
(Installation DIRECTION)

任意(Arbitrarily)

減速比  
(Speed ratio) 15 20 25 30 35 40 50 70 100額定輸出力矩  
(Rated output torque) 208Nm 290Nm 330Nm 208Nm 300Nm 260Nm 330Nm 300Nm 230Nm

---	2021-2-1		00初版		陳國棟			
改版 SYM	年月日 DATE		變更事項 REVISIONS		設計 BY	備注 NOTE		

制圖  
PRAWN 設計  
DESIGNED 品名:  
TITLE 精密行星減速機  
Precision Planetary Gear Reducer規格:  
SPEC 規格:  
SPEC GPB115-L2-(22-110-145-M8)

吉嘉精密科技有限公司  
GIGA Precision Technology Co., Ltd
A4