

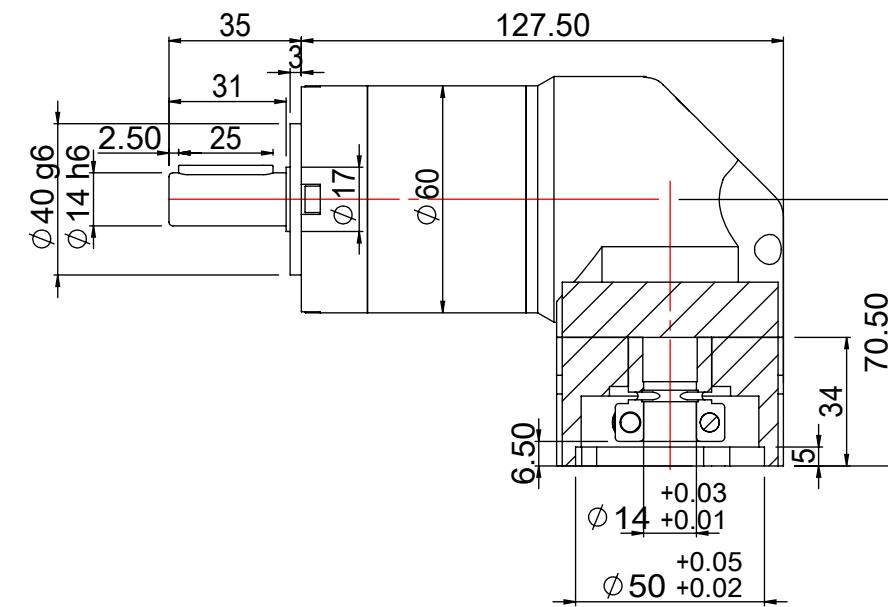


輸出端(output)

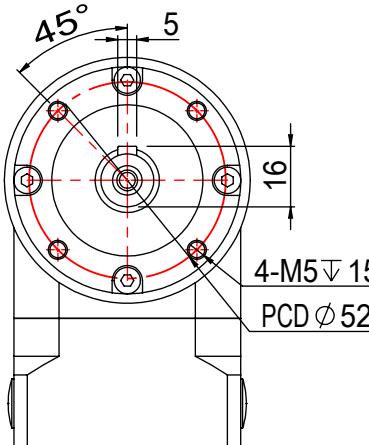

輸入端(input)

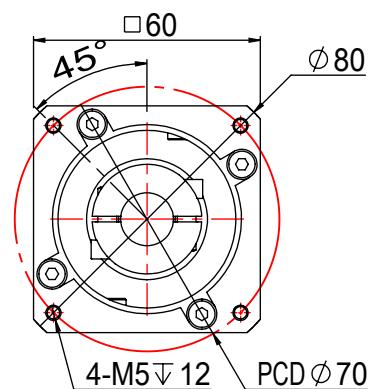

A

B

C

D

A

B

C

急停扭矩 (Emergency Stop Torque)	3倍額定輸出力矩 (3 times rated output torque)
額定輸入轉速 (Rated input speed)	4000rpm
背隙 (Dorsal gap)	$\leq 12\text{arcmin}$
容許徑向力 (Allowable radial force)	220N
容許軸向力 (Allowable axial force)	240N
使用壽命 (Service life)	10000hr
效率 (Efficiency)	$\geq 93\%$
使用溫度範圍 (Operating temperature range)	$-10^\circ\text{C} \sim 80^\circ\text{C}$
防護等級 (protection class)	IP65
噪音值 (Noise value)	$\leq 61\text{dB}$
安裝方式 (Installation DIRECTION)	任意(Arbitrarily)

減速比 (Speed ratio)	15	20	25	30	35	40	50	70	100
額定輸出力矩 (Rated output torque)	36Nm								

---	2018-12-26	00初版	陳國棟
改版 SYM	年月日 DATE	變更事項 REVISIONS	設計 BY
			備注 NOTE

制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer
		規格: SPEC	GPLR060-L2- (14-50-70-M5)
G+ [®] 吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd			A4