
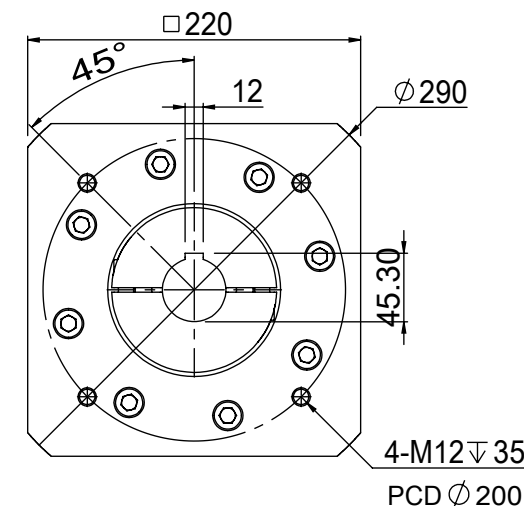
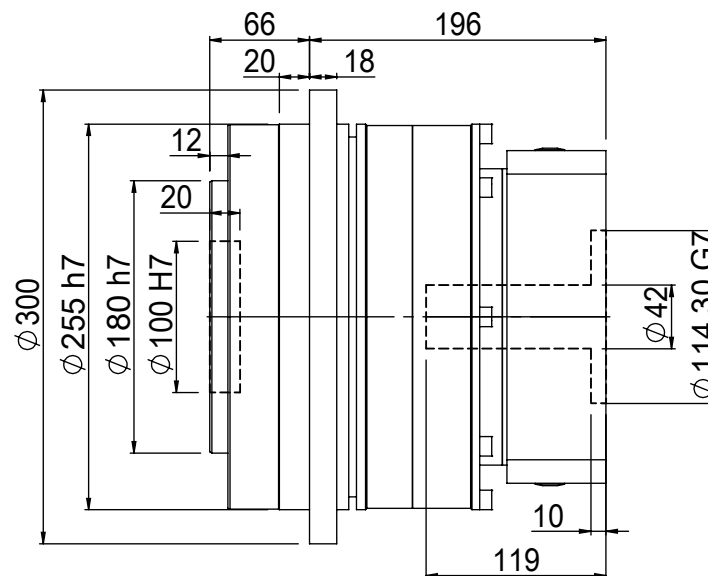


輸出端(output)

輸入端(input)

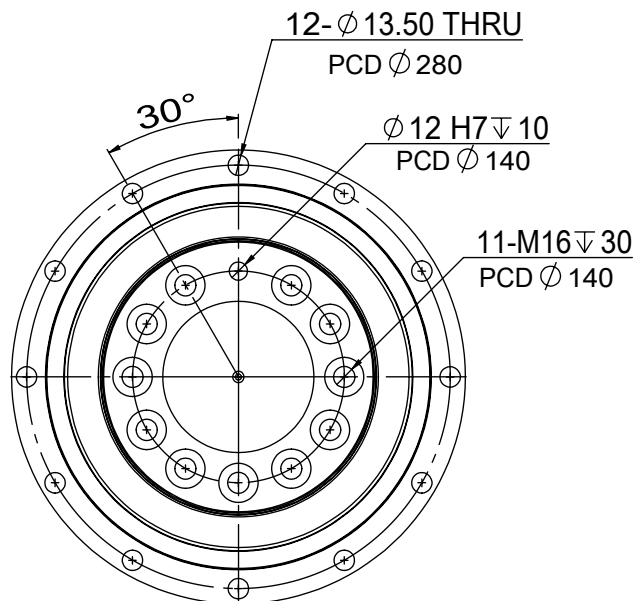

C	急停扭矩 (Emergency Stop Torque)	3倍額定輸出力矩 (3 times rated output torque)	
	額定輸入轉速 (Rated input speed)	2000rpm	
	最大輸入轉速 (Maximum input speed)	4000rpm	
	背隙 (Dorsal gap)	P1	≤3arcmin
		P2	≤5arcmin
	最大彎曲力矩 (maxi bending torque)	5900Nm	
	容許軸向力 (Allowable axial force)	29430N	
	使用壽命 (Service life)	20000hr	
	效率 (Efficiency)	≥97%	
D	使用溫度範圍 (Operating temperature range)	-10℃~90℃	
	防護等級 (protection class)	IP65	
	噪音值 (Noise value)	≤70dB	
	安裝方式 (Installation DIRECTION)	任意(Arbitrarily)	

減速比 (Speed ratio)	4	5	7	10
額定輸出力矩 (Rated output torque)	1700Nm	2000Nm	1800Nm	1500Nm

---	2018-12-26	00初版	陳國棟	
改版 SYM	年 月 日 DATE	變更事項 REVISIONS	設計 BY	備 注 NOTE
制圖 PRAWN	設計 DESIGNED	品 名: TITLE	精密行星減速機 Precision Planetary Gear Reducer	
		規格: SPEC	GPD255-L1-(42-114.3-200-M12)	
		<div><div><div>G+</div><div>®</div></div><div>吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd</div></div>		
		A4		

比例SCALE:1:5

图纸 1 (共1)