



輸出端(output)

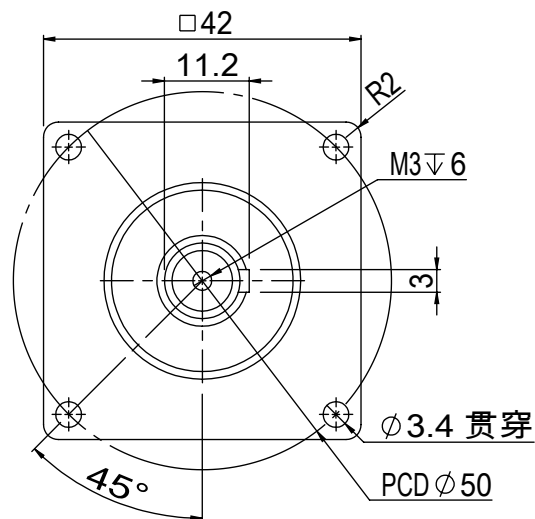


輸入端(input)

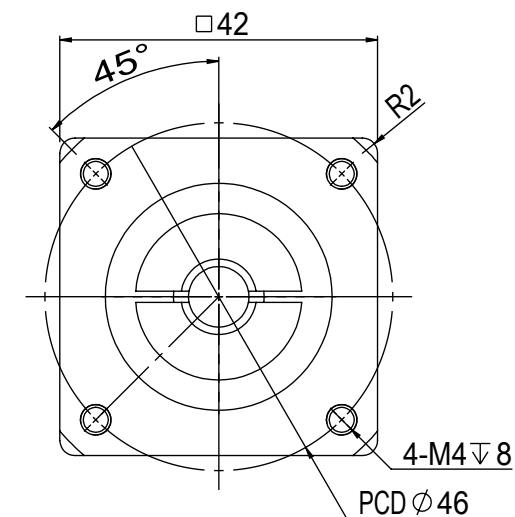

急停扭矩 (Emergency Stop Torque)	3倍額定輸出力矩 (3 times rated output torque)
額定輸入轉速 (Rated input speed)	3000rpm
背隙 (Dorsal gap)	≤8arcmin
容許徑向力 (Allowable radial force)	280N
容許軸向力 (Allowable axial force)	200N
使用壽命 (Service life)	20000hr
效率 (Efficiency)	≥94%
使用溫度範圍 (Operating temperature range)	-25℃～90℃
防護等級 (protection class)	IP65
安裝方式 (Installation DIRECTION)	任意(Arbitrarily)

減速比 (Speed ratio)	16	20	25	32	40
額定輸出力矩 (Rated output torque)	12Nm	12Nm	10.5Nm	12Nm	10.5Nm

---	2018-12-26	00初版	陳國棟	
改版 SYM	年 月 日 DATE	變更事項 REVISIONS	設計 BY	備 注 NOTE
制圖 PRAWN	設計 DESIGNED	品 名: TITLE	精密行星減速機 Precision Planetary Gear Reducer	
		規 格: SPEC	GPF042-L2-(8-30-46-M4)	
		 吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd		A4
	4	比例SCALE:1:1		圖紙 1 (共1)