

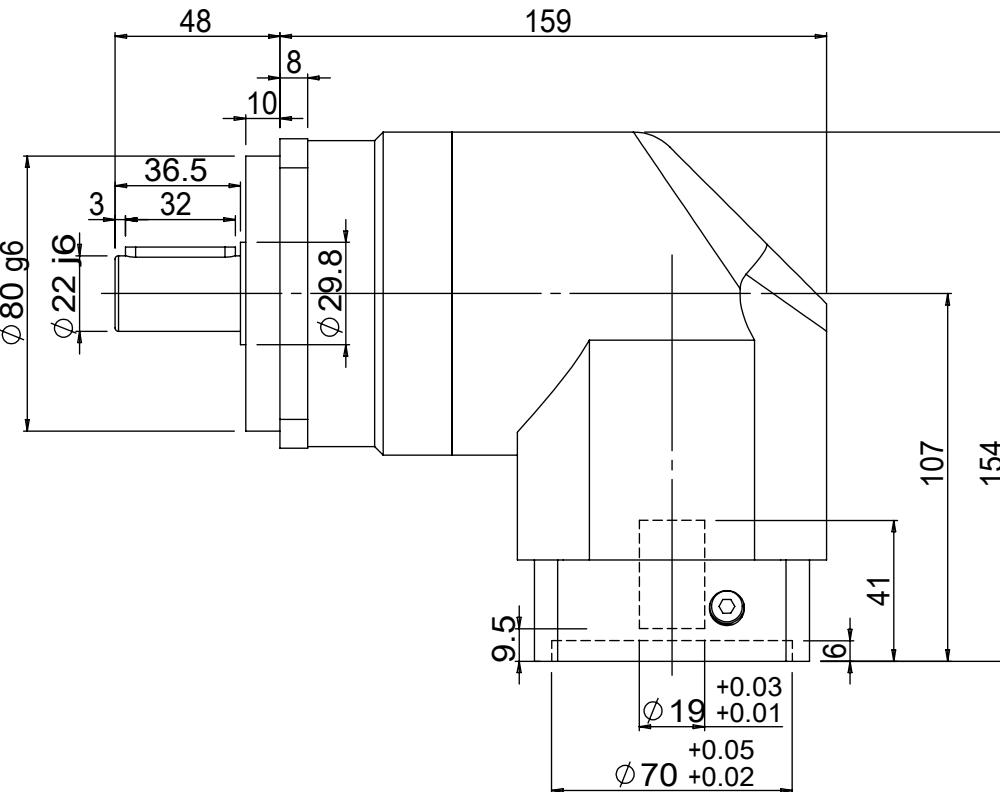


輸出端(output)

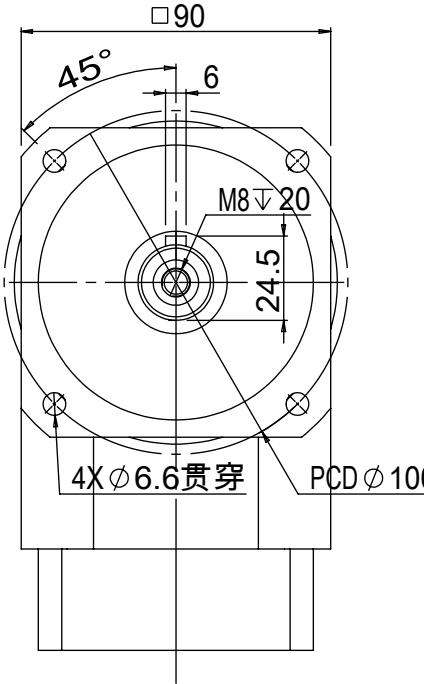

輸入端(input)

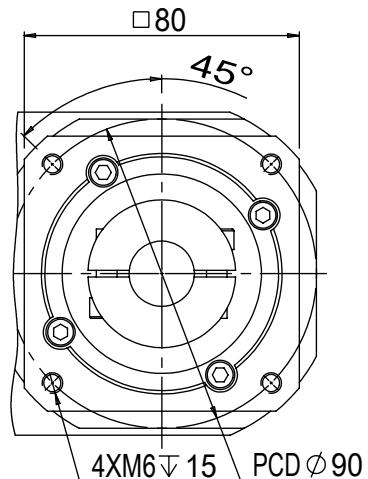

A

B

C

D

A

B

C

| | | |
|---|---|----------|
| 急停扭矩 (Emergency Stop Torque) | 3倍額定輸出力矩 (3 times rated output torque) | |
| 額定輸入轉速 (Rated input speed) | 4000rpm | |
| 最大輸入轉速 (Maximum input speed) | 8000rpm | |
| 背隙 (Dorsal gap) | P1 | ≤6arcmin |
| | P2 | ≤9arcmin |
| 容許徑向力 (Allowable radial force) | 3250N | |
| 容許軸向力 (Allowable axial force) | 1625N | |
| 使用壽命 (Service life) | 20000hr | |
| 效率 (Efficiency) | ≥95% | |
| 使用溫度範圍 (Operating temperature range) | -10°C~90°C | |
| 防護等級 (protection class) | IP65 | |
| 噪音值 (Noise value) | ≤65dB | |
| 安裝方式 (Installation DIRECTION) | 任意(Arbitrarily) | |

| 減速比 (Speed ratio) | 3 | 4 | 5 | 7 | 10 | 14 | 20 |
|---------------------------------|------|-------|-------|-------|-------|-------|-------|
| 額定輸出力矩 (Rated output torque) | 90Nm | 120Nm | 150Nm | 140Nm | 100Nm | 140Nm | 100Nm |

| 改版 SYM | 年月日 DATE | 變更事項 REVISIONS | 設計 BY | 備注 NOTE |
|-----------|-------------|-------------------|----------|------------|
| --- | 2018-12-26 | 00初版 | 陳國棟 | |

| | | | |
|---|----------------|--------------|---|
| 制圖 PRAWN | 設計 DESIGNED | 品名: TITLE | 精密行星減速機 Precision Planetary Gear Reducer |
| | | 規格: SPEC | GPVR090-L1-(19-70-90-M6) |
| G+ ® 吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd | | | A4 |