



A


輸出端(output)

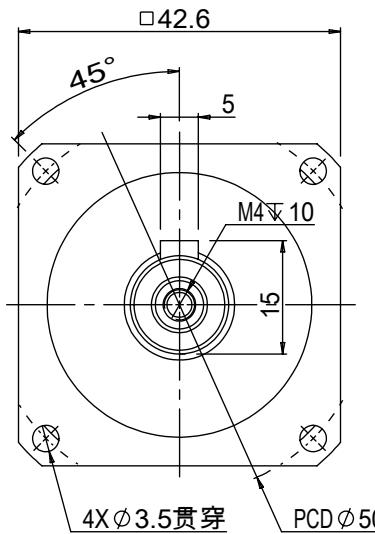

B

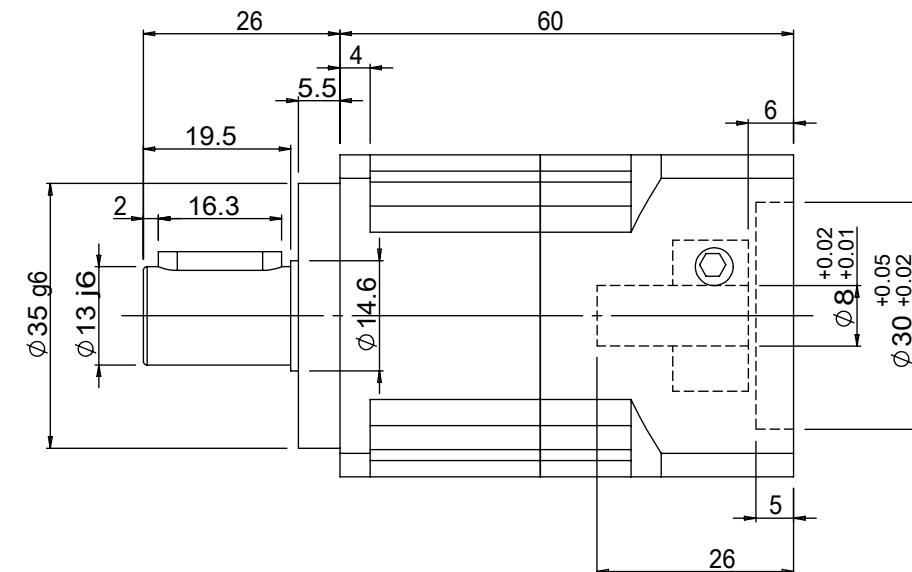

輸入端(input)

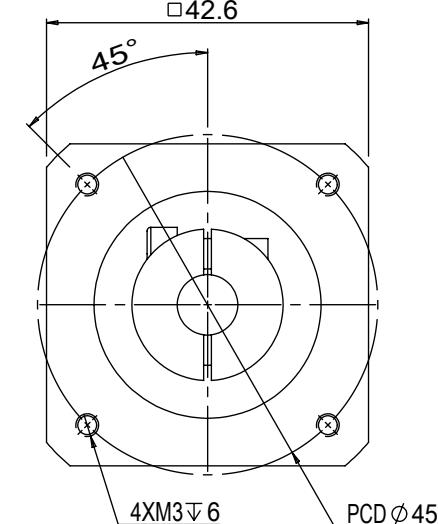

C

急停扭矩
(Emergency Stop Torque)3倍額定輸出力矩
(3 times rated output torque)額定輸入轉速
(Rated input speed)

5000rpm

最大輸入轉速
(Maximum input speed)

10000rpm

背隙
(Dorsal gap)

P2

≤5arcmin

容許徑向力
(Allowable radial force)

780N

容許軸向力
(Allowable axial force)

390N

使用壽命
(Service life)

20000hr

效率
(Efficiency)

≥97%

使用溫度範圍
(Operating temperature range)

-10°C~90°C

防護等級
(protection class)

IP56

噪音值
(Noise value)

≤56dB

安裝方式
(Installation DIRECTION)

任意(Arbitrarily)

減速比 (Speed ratio)	4	5	7	10
額定輸出力矩 (Rated output torque)	19Nm	22Nm	19Nm	14Nm

---	2021-2-1	00初版	陳國棟	
改版 SYM	年月日 DATE	變更事項 REVISIONS	設計 BY	備注 NOTE

制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer
-------------	----------------	--------------	---

規格: SPEC	GPB042-L1-(8-30-45-M3)
-------------	------------------------



吉嘉精密科技有限公司
GIGA Precision Technology Co., Ltd

A4