



DONKIN BALL VALVE

455/51
455/57

The Series 455/51 & 455/57 are high quality, clear bore, general service ball valves, which are ideal for gas isolation and suitable for use with under-pressure drilling equipment. The LD (limited dimension) version has been designed for tapping directly into live gas mains and is suitable for combined drilling, tapping and service insertion machines to BGC/PS/E1.

Standards

- EN 12266, GIS/E1, GIS/V4*

Tests/Approval

- Kitemark approved to GIS/V4

Service Conditions

Maximum Working Pressure: 7 Bar (100 psig)
Temperature Range: -10°C to +50°C

Features:

- Maintenance free compact design
- Pre-loaded PTFE seats
- One piece body
- High torque design to prevent unauthorised operation
- One size false cap fits all sizes
- Totally enclosed design for buried service
- Design ensures minimum pressure drop
- Full clear bore for under pressure drilling

Options:

- LD (limited dimension) version overall dimension in accordance with BGES/F2
- Available with PE tails for use as purge or bypass point valves (See Datasheet 455-74)


*Note:


For GIS/V4 applications the maximum working pressure is 2 bar.

455-57



455-51



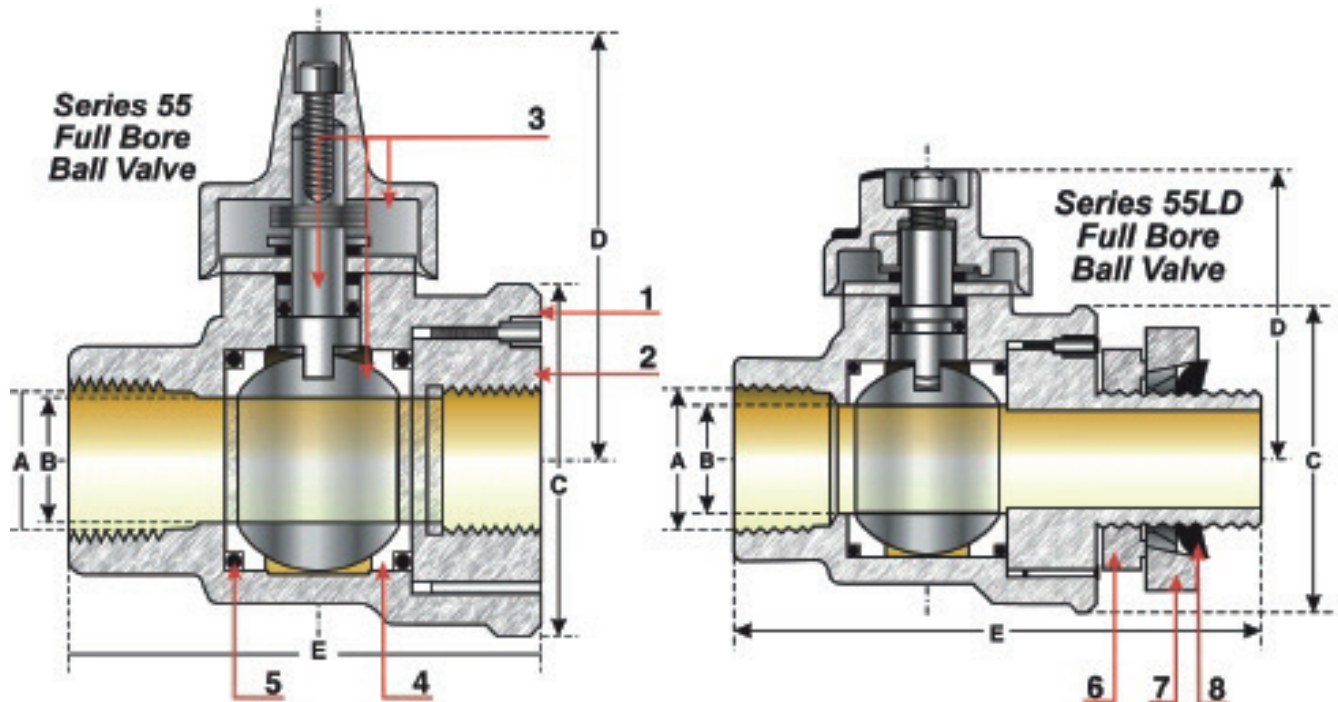

MATERIALS OF CONSTRUCTION

No	Description	Material
1	Body	Ductile Iron, EN 1563 - GJS - 400 - 15
2	Body End	Carbon Steel, BS 970 070M20
3	Ball, Stem and Gland	Stainless steel, BS 970 GR 316 (326)
4	Seat 1	5% graphic filled PTFE
5	'O' Ring	Nitrile Rubber, EN 682 455-21:
6	Back Nut	SG Iron, EN 1563 - GJS - 450 - 10
7	Collar	SG iron, EN 1563 - GJS - 450 - 10
8	Seal	Nitrile Rubber EN 682

DIMENSIONS & WEIGHTS

Series 455-51				Series 455-57			
Valve Size A	3/4"	1"	2"	Valve Size A	3/4"	1"	
Bore B	20mm	25mm	50mm	Bore B	18mm	23mm	
Diameter C	58mm	70mm	108mm	Diameter C	58mm	70mm	
Height D	61mm	66mm	85mm	Height D	61mm	66mm	
Length E	90mm	98mm	150mm	Length E	120mm	124mm	
Weight	0.76kg	1.5kg	3.9kg	Weight	1kg	1.6kg	

Product Description	Size	LNS Number	Comments
Series 455-51 Clear Bore DI Ball Valve	3/4"	45500220511	Standard Valve (Female/Female Thread)
Series 455-51 Clear Bore DI Ball Valve	1"	45500320511	Standard Valve (Female/Female Thread)
Series 455-51 Clear Bore DI Ball Valve	2"	45500620511	Standard Valve (Female/Female Thread)
Series 455-57 Clear Bore DI Ball Valve	3/4"	45500221571	Limited Dimension (Male/Female Thread)
Series 455-57 Clear Bore DI Ball Valve	1"	45500321571	Limited Dimension (Male/Female Thread)