

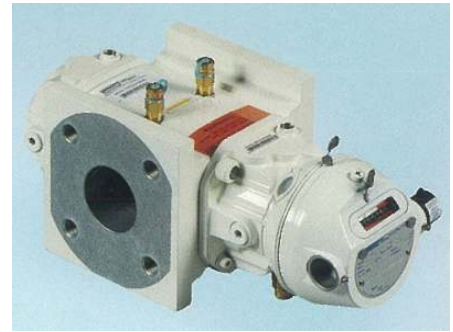


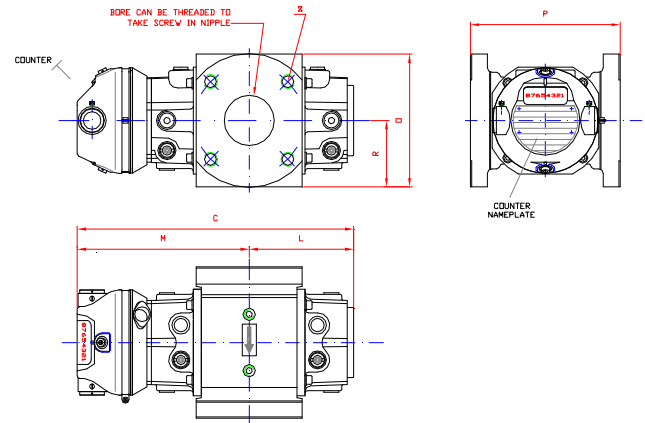

Dresser™ MRD0025B4B Rotary Meter

Temperature Range	deg.C	-40 to +70	Displaced Volume/Revolution	dm ³	0.21
Base Rating (Qmax)	m ³ /h	25	Drive Rate	m ³ /rev	0.1
Max. Operating Pressure	bar	16	Min. Odometer Reading	m ³ /h	0.002
Leak Test (1.1 x MOP)	bar	17.6	Odometer Turnover	yrs	4.5
Static Test (1.5 x MOP)	bar	24	Nominal Pipe Size	mm	50
Rangeability +/- 1%	ratio	28:1	Flange to Flange	mm	171
Rangeability +/- 2%	ratio	50:1	Flange Connection	DIN	DN50 PN16
Start Rate	m ³ /h	0.0790	Bolts per Flange	Qty	4
Stop Rate	m ³ /h	0.0575	Bolt Size	mm	M16 x 40
Flow Rate @ 1.25mbar	m ³ /h	25	Flange Bolt Hole Depth	mm	23.8
Avg. Differential, 100% Flow	mbar	0.54	Bolt Torque: Lubricated/Non-Lub.	N-m	74/81
Max. Pressurisation Rate	kPa/sec	35	Oil Capacity (Side Inlet)	ml	24
Max. Operating Speed	rpm	1990	Oil Capacity (Top Inlet)	ml	89
Gear Ratio	ratio	476.16			

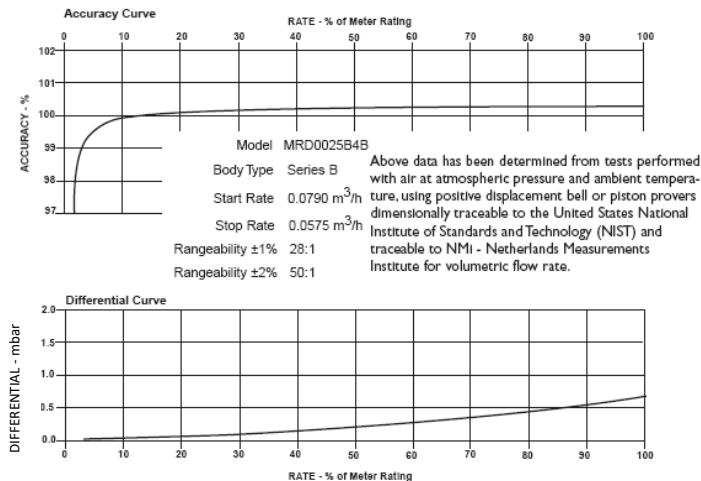

Meter	C mm	L mm	M mm	O mm	P mm	R mm	Z	Flange	Weight Kg
8C	316	119	197	152	171	76	4	DN50	9