






Dresser™ MRD0650B4D Rotary Meter

Temperature Range	deg.C	-40 to +70	Displaced Volume/Revolution	dm ³	0.57
Base Rating (Qmax)	m ³ /h	650	Drive Rate	m ³ /rev	1.0
Max. Operating Pressure	bar	16	Min. Odometer Reading	m ³ /h	0.02
Leak Test (1.1 x MOP)	bar	17.6	Odometer Turnover	yrs	1.76
Static Test (1.5 x MOP)	bar	24	Nominal Pipe Size	mm	100
Rangeability +/- 1%	ratio	115:1	Flange to Flange	mm	241
Rangeability +/- 2%	ratio	130:1	Flange Connection	DIN	DN100 PN16
Start Rate	m ³ /h	0.2926	Bolts per Flange	Qty	8
Stop Rate	m ³ /h	0.1628	Bolt Size	mm	M16 x 40
Flow Rate @ 1.25mbar	m ³ /h	403	Flange Bolt Hole Depth	mm	24.0
Avg. Differential, 100% Flow	mbar	4.05	Bolt Torque: Lubricated/Non-Lub.	N-m	74/81
Max. Pressurisation Rate	kPa/sec	35	Oil Capacity (Side Inlet)	ml	100
Max. Operating Speed	rpm	1917	Oil Capacity (Top Inlet)	ml	645
Gear Ratio	ratio	176.64			

Accuracy Curve

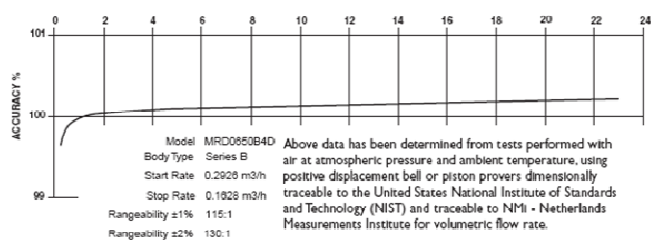

Differential Curve

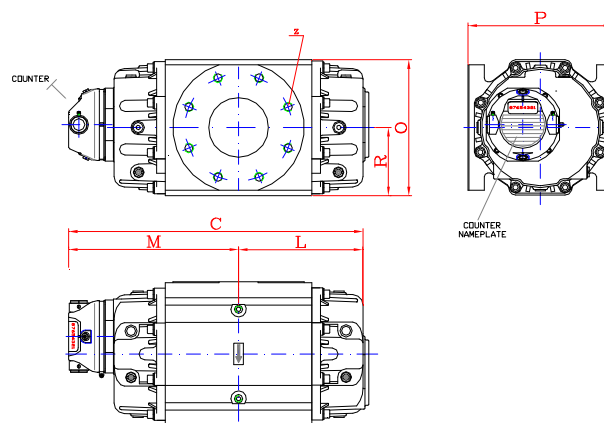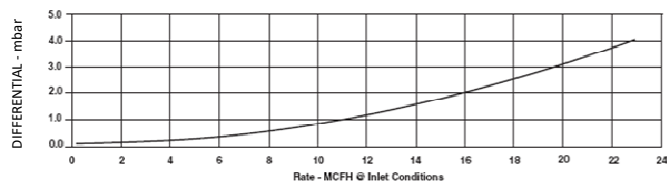

Meter	C mm	L mm	M mm	O mm	P mm	R mm	Z	Flange	Weight Kg
23M-4"	695	310	385	241	241	113	8	DN100	49