



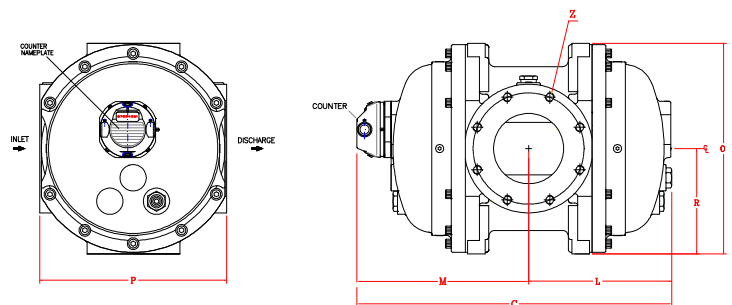

Dresser™ MRD0650B4E Rotary Meter

Temperature Range	deg.C	-40 to +70	Displaced Volume/Revolution	dm ³	10.49
Base Rating (Qmax)	m ³ /h	650	Drive Rate	m ³ /rev	1.0
Max. Operating Pressure	bar	16	Min. Odometer Reading	m ³ /h	0.02
Leak Test (1.1 x MOP)	bar	17.6	Odometer Turnover	yrs	1.76
Static Test (1.5 x MOP)	bar	24	Nominal Pipe Size	mm	150
Rangeability +/- 1%	ratio	40:1	Flange to Flange	mm	406
Rangeability +/- 2%	ratio	50:1	Flange Connection	DIN	DN150 PN16
Start Rate	m ³ /h	0.6510	Bolts per Flange	Qty	8
Stop Rate	m ³ /h	0.5100	Bolt Size	mm	M20 x 60
Flow Rate @ 1.25mbar	m ³ /h	547	Flange Bolt Hole Depth	mm	41.0
Avg. Differential, 100% Flow	mbar	1.82	Bolt Torque: Lubricated/Non-Lub.	N-m	108
Max. Pressurisation Rate	kPa/sec	35	Oil Capacity (Side Inlet)	ml	1200
Max. Operating Speed	rpm	1035	Oil Capacity (Top Inlet)	ml	4600
Gear Ratio	ratio	95.325			

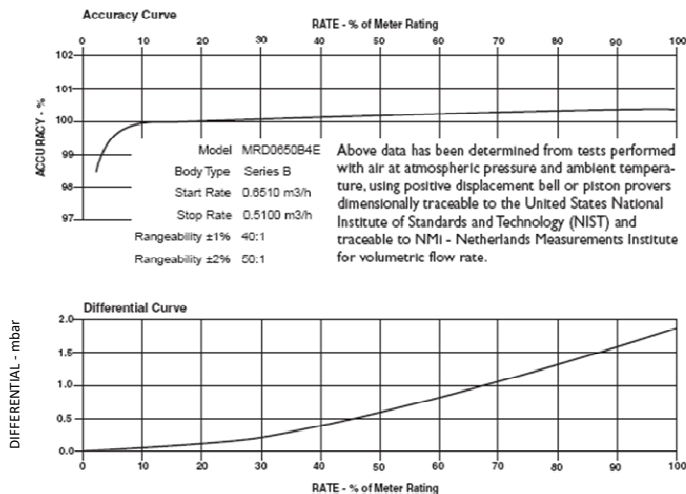

Meter	C mm	L mm	M mm	O mm	P mm	R mm	Z	Flange	Weight Kg
23M-6"	686	311	375	457	406	229	8	DN150	125