



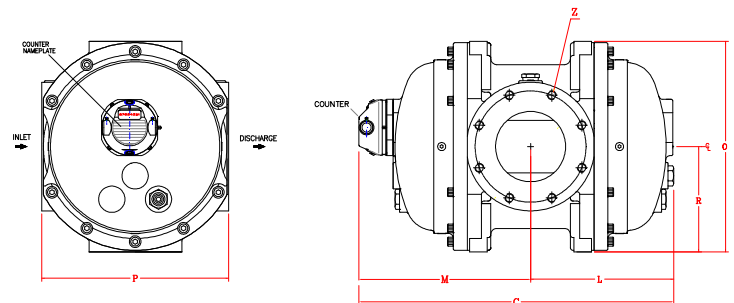

Dresser™ MRD1600B4F Rotary Meter

Temperature Range	deg.C	-40 to +70	Displaced Volume/Revolution	dm ³	19.64
Base Rating (Qmax)	m ³ /h	1600	Drive Rate	m ³ /rev	10.0
Max. Operating Pressure	bar	16	Min. Odometer Reading	m ³ /h	0.2
Leak Test (1.1 x MOP)	bar	17.6	Odometer Turnover	yrs	7.13
Static Test (1.5 x MOP)	bar	24	Nominal Pipe Size	mm	200
Rangeability +/- 1%	ratio	40:1	Flange to Flange	mm	533
Rangeability +/- 2%	ratio	50:1	Flange Connection	DIN	DN200 PN16
Start Rate	m ³ /h	1.1300	Bolts per Flange	Qty	12
Stop Rate	m ³ /h	0.8200	Bolt Size	mm	M20 x 60
Flow Rate @ 1.25mbar	m ³ /h	1181	Flange Bolt Hole Depth	mm	41.0
Avg. Differential, 100% Flow	mbar	2.5	Bolt Torque: Lubricated/Non-Lub.	N-m	108
Max. Pressurisation Rate	kPa/sec	35	Oil Capacity (Side Inlet)	ml	1200
Max. Operating Speed	rpm	1344	Oil Capacity (Top Inlet)	ml	4600
Gear Ratio	ratio	509.14			

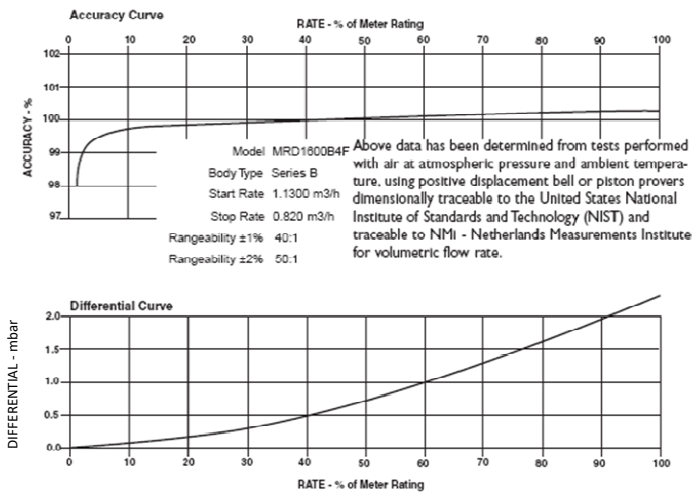

Meter	C mm	L mm	M mm	O mm	P mm	R mm	Z	Flange	Weight Kg
56M	922	428	494	457	533	229	12	DN200	165