



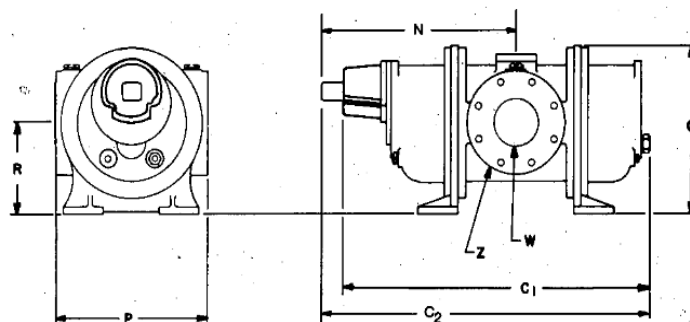

Dresser™ MRD2885A20 Rotary Meter

Temperature Range	deg.C	-40 to +70
Base Rating (Qmax)	m ³ /h	2885
Max. Operating Pressure	bar	8.6
Leak Test (1.1 x MOP)	bar	9.46
Static Test (1.5 x MOP)	bar	13.9
Rangeability +/- 1%	ratio	40:1
Rangeability +/- 2%	ratio	50:1
Start Rate	m ³ /h	4.250
Stop Rate	m ³ /h	3.400
Flow Rate @ 1.25mbar	m ³ /h	2137
Avg. Differential, 100% Flow	mbar	2.75
Max. Pressurisation Rate	kPa/sec	35
Max. Operating Speed	rpm	810
Gear Ratio	ratio	168.56

Displaced Volume/Revolution	dm ³	59.296
Drive Rate	m ³ /rev	10.0
Min. Odometer Reading	m ³ /h	0.2
Odometer Turnover	hrs	4.0
Nominal Pipe Size	Inch	10
Flange to Flange	mm	711
Flange Connection	ANSI	125
Bolts per Flange	Qty	12
Bolt Size	Inch	7/8 x 3
Flange Bolt Hole Depth	mm	33.0
Bolt Torque: Lubricated/Non-Lub.	N-m	108
Oil Capacity (Side Inlet)	ml	5900

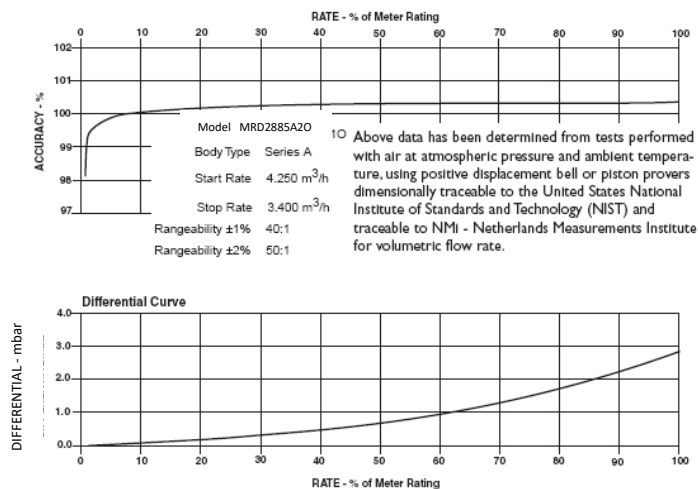

Meter	C ₂ mm	L mm	N mm	O mm	P mm	R mm	Z	W	Weight Kg
102M	1295	592	703	754	711	400	12	ANSI 125	1010