



DONKIN SOFTSEAL VALVE DN50 DUCTILE IRON BODY / CAST IRON BONNET

555/202
001

The Series 555 Softseal Valve is a double-faced, resilient seat, internal screw, full bore wedge gate valve. It is designed primarily for the isolation of natural gas, towns gas. The unique clip on indicator allows complete flexibility for the same valve to be used above or below ground.

Product description:

Pressure range: 7 Barg (100psig) as standard.

Temperature range: -10°C to +60°C.

Fluids for Standard Valve: Natural gas, Non-aggressive gases,

Fluids for Optional Valve: Manufactured gas (Viton 'O' Rings)

Standards:

- Where covered by the requirements of the Pressure Equipment Directive these products are produced in full compliance and carry CE marking.
- GIS/V7-1
- EN 12266

Tests/Approvals:

- Approved to GIS/V7-1.

Features:

- Full block and bleed with pressure relieving plug.
- Double 'O' ring seal.
- Metal to metal secondary seal.
- Maintenance free.
- Clip on indicator.
- Full bore.
- Suitable for under pressure drilling.
- Suitable for above and below ground use.

Accessories:

- False cap
- Handwheel
- Handwheel/indicator
- Gear box
- Bare shaft end.
- Actuator

Important Note:

Please ensure that further corrosion protection is applied to the valve and flanges immediately following installation. Please refer to Donkin installation document IC5445 prior to installation.



General Note:

It is important, when installing any valve that pipeline stresses are kept to a minimum and no undue external forces are placed on the valve connections. Correct installation procedures should be followed. For details please see Donkin publication IC5445. Standard flanges are PN16, ASA 150 and other standards available.



GIS/V7-1
KM 518241

Expect... **AVK**

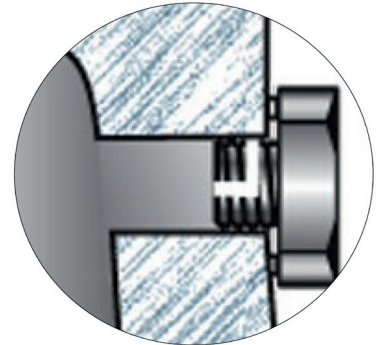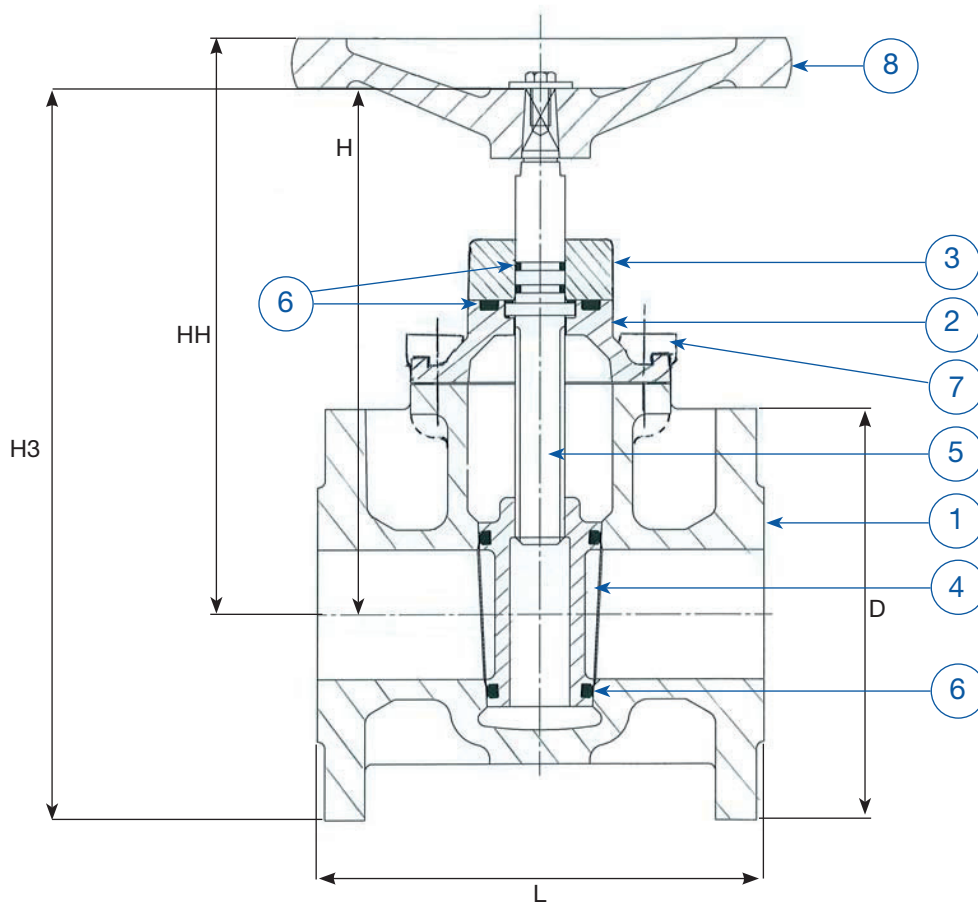

BR - Plugged Boss for
Block & Bleed Tapped BSP.P

Component list

1. Body	Ductile iron to BS EN1563 GJS 450/10
2. Bonnet	Cast iron to BS EN1561 - GJL-250
3. Gland	Cast iron to BS EN1561 - GJL-250
4. Wedge Gate	Cast iron to BS EN1561 - GJL-250
5. Spindle	Standard: Carbon steel to EN10087 11SMn30 / EN1A Option: Stainless steel to EN10088 X8CrNiSi8-9 (303S31).
6. O-ring Seals	Standard: Nitrile Rubber EN682 Type G Option: Viton.
7. Bolts	To ISO 4762 Gr 8.8 Zinc plated
8. Handwheel	Cast iron to BS EN1561 - GJL-250.

Reference nos. and dimensions

Size	H3	L	BR	D	HH	H	Drain Plug (when fitted)	Turns to close	Net Weight Kg
DN50	306	178	Rp½	165	223	214	Rp½	8½	12.5