

Spray guns airspray

Manual and automatic spray guns



Product families

EcoGun AS MAN – manual air spray guns

EcoGun AS AUTO – automatic air spray guns



EcoGun AS MAN

Manual air spray guns

The Dürr collection of manual air spray guns is designed for all kind of tasks in multiple application areas. The line of gravity feed spray guns are primarily used for coating of smaller area like car body repairs, furniture lacquer application and others. There is also a line of pressure feed spray guns which are primarily used for larger area painting. Special variants of spray guns are available for heavy duty application of high solid materials like enamels or glazes.



PRODUCT LINE

	EcoGun 116	EcoGun 910
Part No.	see page no. 17	see page no. 17
Feeding	Gravity	Gravity
Connector fluid	G3/8" / M16x1.5 (male)	G3/8" (male)
Connector air	1/4" Universal (male)	G1/4"
Max. air pressure	6.0 bar [87 psi]	8.0 bar [116 psi]
Nozzle sizes	1.0* / 1.2 / 1.3 / 1.4 / 1.5 / 1.6 / 1.8 / 2.0 / 2.2 / 2.8 / 4.0* mm	0.5* / 0.8* / 1.0* / 1.2* / 1.3* / 1.4 / 1.5* / 1.6 / 1.8 / 2.0 / 2.5 / 3.0 mm
Technical highlights	Bottom air inlet regulator. Optional extensions. Different material connectors available.	Air inlet regulation lever on top. Needle adjustment lock. Fine quality nozzles. Bayonet air cap and needle connection system.
Field of use	General paint application. Primers, fillers, top coats in general industry etc. Low duty abrasive materials like glazes, enamels or zinc paints.	Fine finish coatings. Top coats, clear coats, automotive fillers and primers.

* nozzles available as accessory only



GRAVITY CUPS

	600 ml G3/8"	600 ml G3/8"	600 ml M16x1.5	750 ml G3/8" Al	125 ml G3/8"
Part No.	N08010034	N08010075	N08010040	N08010035	N08010031
Material	Nylon	Nylon	Nylon	Aluminium	Nylon
Filter sieve	0.275 mm	none	0.275 mm	none	none
Related spray guns	EcoGun 116 EcoGun 910	EcoGun 116 EcoGun 910	EcoGun 116	EcoGun 116 EcoGun 910	EcoGun 116 EcoGun 910

EcoGun AS MAN


Manual air spray guns



PRODUCT LINE		
	EcoGun 246	EcoGun 249
Part No.	see page no. 17	see page no. 17
Feeding	Pressure	Pressure
Connector fluid	M14x1.5 / 3/8" Universal (male)	M14x1.5 / 3/8" Universal (male)
Connector air	1/4" Universal (male)	1/4" Universal (male)
Max. air pressure	6.0 bar (87 psi)	6.9 bar (100 psi)
Max. fluid pressure	6.0 bar (87 psi)	6.9 bar (100 psi)
Nozzle sizes	1.0 / 1.2* / 1.4 / 1.5* / 1.6* / 1.8 / 2.2 / 2.8* / 4.0* mm	0.8* / 1.0* / 1.2 / 1.3* / 1.4 / 1.6* / 1.8* / 2.0* / 2.2 / 2.8* / 4.0* mm
Technical highlights	Air inlet regulation lever on top. Different material inlets. Optional extensions. Stainless steel material path.	Bottom air inlet regulator. Needle adjustment lock. Fine quality nozzles. Different material inlets, heavy duty hardened nozzles. Stainless steel material path.
Field of use	General paint application. Primers, fillers, top coats, stains in general industry etc. Low duty abrasive materials like glazes, enamels or zinc paints.	Fine finish coatings. Stains, top coats, clear coats, automotive fillers and primers. Heavy duty abrasive materials like glazes, enamels or zinc paints.

* nozzles available as accessory only

TECHNICAL ILLUSTRATION

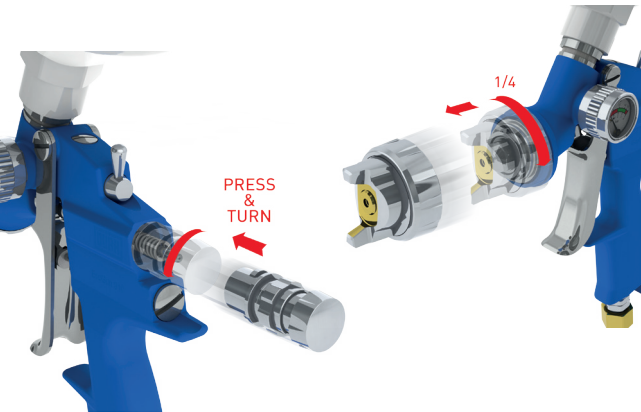



Quick & easy replacement of air cap and needle with bayonet connection.

CUSTOMER BENEFITS



- Gravity and pressure feeding
- Top level quality coating
- Simple to use, easy to maintain
- Wide range of nozzle types to cover all applications

NEW

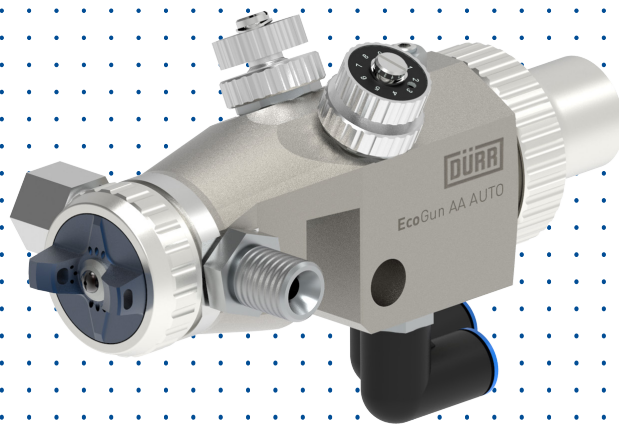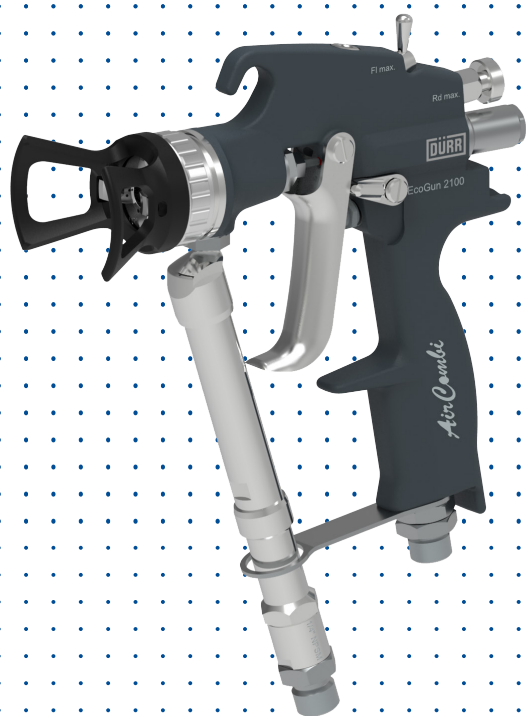

Spray guns air-assist

Manual and automatic air-assist spray guns



Product families

EcoGun AA MAN – manual air-assist spray guns

EcoGun AA AUTO – automatic air-assist spray guns



EcoGun AA MAN

Manual air-assist spray guns

Manual air-assist spray guns are the perfect choice for application of high viscosity material with high demand for surface quality. Typical users are woodcrafters where they can be used to provide perfect finishing for solid wood furniture by solvent and water-borne lacquers. The wide range of nozzles make these spray guns a versatile tool. Spray guns can be fed by EcoPump VP packages.



NEW

PRODUCT LINE

	EcoGun 2100 AirCombi
Part No.	see table below
Connector fluid	1/4" NPSM
Max. fluid pressure	120 (1,740 psi) / 250 bar (3,600 psi)
Connector air	G1/4"
Nozzle sizes	0,18 / 0,23 / 0,28 / 0,33 / 0,38 / 0,43 mm *
Technical highlights	External material inlet with optional filtration (long or short filter). Flat to round regulation. Atomization air regulation.
Field of use	Decorative and protective coatings for wood and metal substrates. Solvent-borne or water-borne lacquers. High viscosity paints and stains.

* See complete range of nozzles on page no. 28 and page no. 29.

CUSTOMER BENEFITS



External paint feed
(allows paint heating)

Material filter options
(long and short filter)

Wide range of nozzle sizes available

TECHNICAL ILLUSTRATION



1 Material inlet with short or long filter, 2 Air inlet, 3 Fan pattern size regulation, 4 Inlet air regulation

ORDER NUMBERS – EcoGun 2100 AIRCOMBI

Part no.	Fluid pressure	Nozzle type	Filter	Air cap
N36280001	120 bar (1,740 psi)	6-KT (hexagonal)	short filter	Air cap 40-130°
N36280002	250 bar (3,600 psi)	6-KT (hexagonal)	short filter	Air cap 40-130°
N36280003	120 bar (1,740 psi)	6-KT (hexagonal)	long filter	Air cap 40-130°
N36280004	250 bar (3,600 psi)	6-KT (hexagonal)	long filter	Air cap 40-130°

Note: Spray gun is delivered without nozzle, they need to be ordered separately. If nozzle with spray angle 30° or lower is required, please order & use other aircap (M35030077)

EcoGun AA AUTO

Automatic air-assist spray guns

Automatic air-assist spray guns are often used in batch paint application where they are a part of the automated painting process. They are characterized by a material path made of stainless steel and a separate air regulation for round and flat spray patterns, while the seal packing is externally adjustable.




PRODUCT LINE

	EcoGun AA AUTO XC N N ACV N P8(6/4) N	EcoGun AA AUTO XC N N FRC N P8(6/4) N	EcoGun AA AUTO XC N N RC N P8(6/4) N
Part No.	N36230157 **	N36230152 **	N36230158 **
Connector fluid	G1/4" (male)		
Connector air atom./cont.	Push-in 8 mm / Push-in 6 & 4 mm		
Max. air pressure atom.	8.0 bar (116 psi)		
Max. air pressure cont.	6.0 bar (87 psi)		
Max. fluid pressure	250 bar (3,600 psi)		
Nozzle sizes	0.18 / 0.23 / 0.28 / 0.33 / 0.38 / 0.43 *		
Technical highlights	Two material inlets. Separate round/flat spray regulation. Needle seal accessible from the outside.		
Field of use	Most flexible gun variant with air valves for separate fan and shaping air regulation; atomizing air flow control inside the gun.	Especially suitable for flat bed machines because of factory set air ratio of fan & shaping air volume / no sprayer adjustment on the gun directly; atomizing air flow control inside the gun	Separate push-in connectors for fan and shaping air regulation; well suitable for robotic and reciprocator applications, where adjustments of the air volume have to be conducted during the application; atomizing air flow is controlled externally via valves / control unit

* See complete range of nozzles on page no. 28 and page no. 29 . ** Air cap and nozzle to be ordered separately.



TECHNICAL ILLUSTRATION

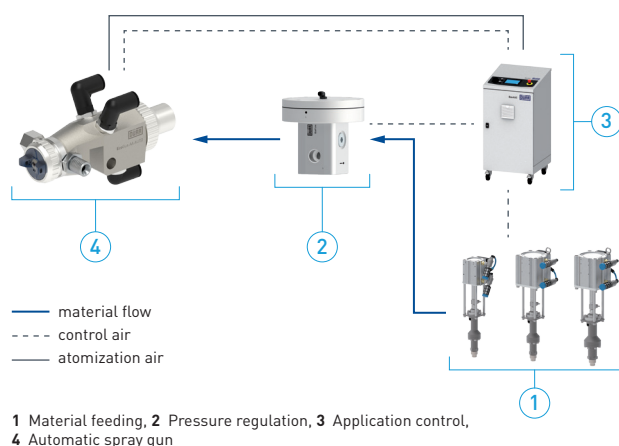

CUSTOMER BENEFITS



- Air-assist and airless work mode possible
- Material pressure up to 250 bar (3,600 psi)
- Material path completely made of stainless steel
- Needle seal accessible from the outside
- Separate round/flat spray regulation (for ACV or RC version)
- Wide range of nozzles available
- Material circulation or direct material supply
- In-line filter available

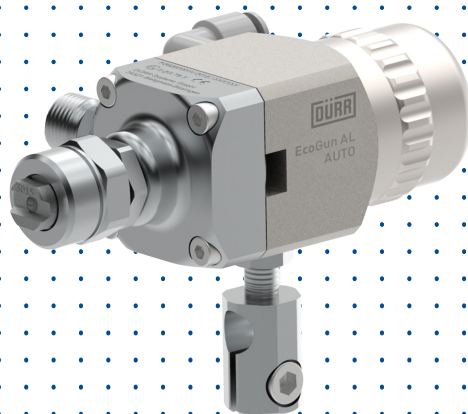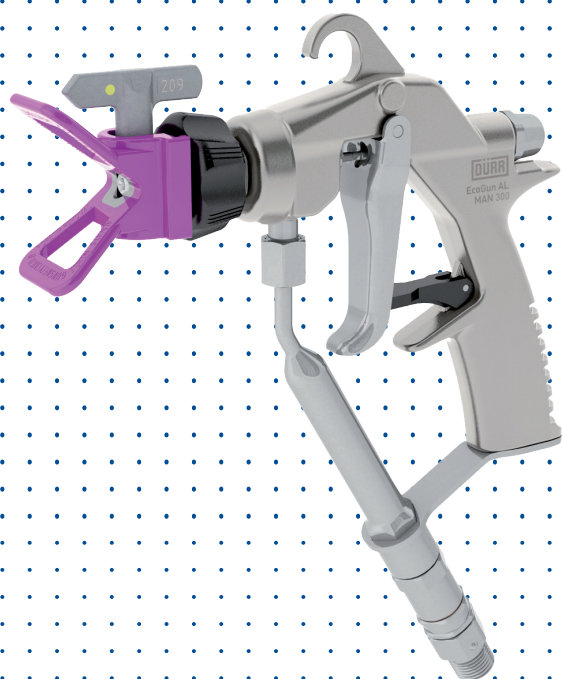

Spray guns airless

Manual and automatic airless spray guns



Product families

EcoGun AL MAN – manual airless spray guns

EcoGun AL AUTO – automatic airless spray guns



EcoGun AL MAN

Manual airless spray guns

Manual airless spray guns are suitable for high pressure paint application. They can be used for anti corrosion protection coating of large steel structures or coating of wood structures. Functionality can be extended by using extensions which can help to paint areas which are difficult to reach. The modular design of these extensions allows to assemble different lengths and angles. Airless spray guns may be used with reversible nozzles that are available in a large number of sizes and angles.



PRODUCT LINE

	EcoGun AL MAN 300
Part No.	see table below
Connector fluid	1/4" NPSM (male)
Max. fluid pressure	300 bar (4,350 psi)
Nozzle bracket connector	11/16" -16 UN
Nozzle sizes	0,18 / 0,23 / 0,28 / 0,33 / 0,38 / 0,43 / 0,48 / 0,53 / 0,58 / 0,63 / 0,68 / 0,73 / 0,78 mm *
Technical highlights	External material inlet, suitable for paint heating.
Field of use	Anti corrosion protection, penetration and sealing applications. Wood building, metal and automotive industry.

* See complete range of nozzles on page no. 32 and page no. 33

ORDER NUMBERS - EcoGun AL MAN 300 (251)

Part no.	Nozzle	Filter
N36240110	0,43mm 50°/517" reversible nozzle	no filter
N36240137	none (nozzles for sealing applications are available separately)	no filter

CUSTOMER BENEFITS



Perfectly balanced ergonomic shape of spray gun body that minimizes fatigue

Material passage ways made of stainless steel

External material supplying part allows application of heated paint


Wide range of available spray nozzles

Optional extensions available (up to 900 mm)

Easy cleaning and maintenance

ATEX EX II 2G T60°C X

TECHNICAL ILLUSTRATION

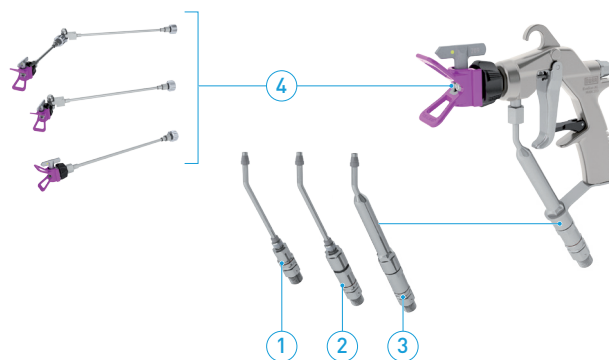

EcoGun AL MAN – Optional parts

1 Material inlet w/o filter, 2 Material inlet with short filter, 3 Material inlet with long filter, 4 Extensions - modular system



Spray guns ESTA

Manual electrostatic spray guns



Product families

EcoGun MAN ESTA – manual electrostatic spray guns



EcoGun MAN ESTA

Manual electrostatic spray guns

The line of manual electrostatic spray guns involves models with external or direct charge for air spray application method. These spray guns are the perfect solution to reduce overspray when deploying manual paint application. They are suitable for solvent or water-borne paints. Small size and light weight are providing long lasting operation without significant fatigue.



PRODUCT LINE


	EcoGun AS MAN EC	EcoGun AS MAN DC
Part No.	see page 37	see page 37
Connector fluid	G3/8" with 60° inner cone (male)	G3/8" with 60° inner cone (male)
Max. fluid pressure	6.0 bar (87 psi)	6.0 bar (87 psi)
Connector air	G1/4" with 60° inner cone (male)	G1/4" with 60° inner cone (male)
Max. operating voltage	30 kV	60 kV
Nozzle sizes	1.1 mm	1.1 mm
Technical highlights	External charging needle. Built-in control lamp to indicate high voltage. High voltage only if the trigger is pulled.	Internal charge via electrode on tip of the needle. Built-in control lamp to indicate high voltage. High voltage only if the trigger is pulled. Model for clear and base coats. Model for metallic coats.
Field of use	For water-borne clear and base coats and fillers.	For solvent-borne clear, metallic and base coats and fillers. A model with insulated material hose is available for water-borne paints.

CUSTOMER BENEFITS



- Solvent resistant composite body guarantees a light weight and a long life
- Maximum charge of 60 kV for high transfer efficiency
- Direct and external charging system available
- Fine atomization even without high voltage
- Suitable for solvent-borne paints

TECHNICAL ILLUSTRATION

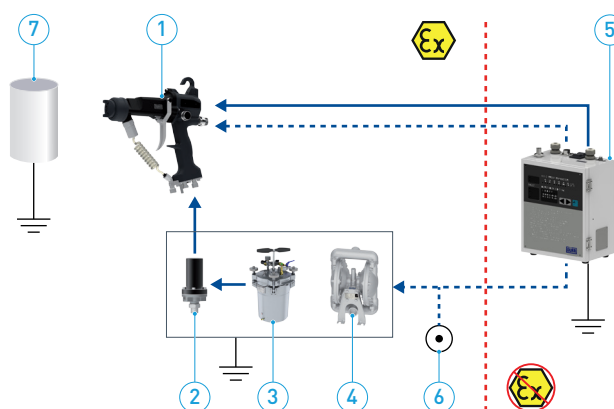

1 EcoGun AS MAN DC, 2 EcoFlow LPF, 3 Pressure pot 10, 4 EcoPump AD, 5 Controller EcoHT 80, 6 Air supply, 7 Coated part

Pressure pots

Pressure pots with a volume of up to 60 liters

The Dürr pressure pot product group is available with or without pneumatic agitators. Pressure pots are suitable for all fluids and solvents supplying manual or automatic spray guns or other equipment. A great advantage of pressure pots is their smooth material delivery without pulsations. There is a line of pressure pots with different volumes available.



PRODUCT LINE - PRESSURE POTS WITHOUT AGITATOR

	Pressure Pot 2 Al	Pressure Pot 2 SST	Pressure Pot 10 Al	Pressure Pot 10 SST	Pressure Pot 12 SST
Part No.	N08160001V				
Volume	2 l	2 l	10 l	10 l	12 l
Material contacted by media	Aluminium	Stainless steel	Aluminium	Stainless steel	Stainless steel
Material connector	G3/8" (male)	G3/8" (male)	M14x1,5 (male)	G1/4" (male)	G1/4" (male)
Connector air inlet / outlet	G1/4" / G1/4" (male)	G1/4" / G1/4" (male)	DN8 / G1/4" (male)	G1/4" / G1/4" (male)	G1/4" / G1/4" (male)
Max. air pressure	6.0 bar (87 psi)	6.0 bar (87 psi)	6.0 bar (87 psi)	6.0 bar (87 psi)	6.0 bar (87 psi)
Max. operating pressure	3.0 bar (44 psi)	6.0 bar (87 psi)	4.5 bar (65.2 psi)	6.0 bar (87 psi)	6.0 bar (87 psi)
Certification	EU (also for CN)	EU, CN, US (ASME)	EU (also for CN)	EU (also for CN)	US (ASME)



	Pressure Pot 20 SST	Pressure Pot 22 SST	Pressure Pot 45 SST	Pressure Pot 60 SST
Part No.	N08160001V			
Volume	20 l	22 l	45 l	60 l
Material contacted by media	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Material connector	G3/8" (male)	G3/8" (male)	G3/8" (male)	G3/8" (male)
Connector air inlet / outlet	G1/4" / G1/4" (male)	G1/4" / G1/4" (male)	G1/4" / G1/4" (male)	G1/4" / G1/4" (male)
Max. air pressure	6.0 bar (87 psi)	6.0 bar (87 psi)	6.0 bar (87 psi)	6.0 bar (87 psi)
Max. operating pressure	6.0 bar (87 psi)	6.0 bar (87 psi)	6.0 bar (87 psi)	6.0 bar (87 psi)
Certification	EU (also for CN)	US (ASME)	EU, CN, US (ASME)	EU, CN, US (ASME)

Note

This product contains seals made of FKM. When using materials containing solvents, we strongly recommend the use of FEP seals [see parts numbers on page no. 61]. For further technical details please contact us.



Dosing units

Solution for 2K and 3K paint application

Product families

EcoDose 2K – dosing units for two component materials

EcoDose 3K – dosing units for three component materials

EcoDose 2K Easy – dosing unit for two component materials



EcoDose 2K

Dosing units for two component materials

The Dürr **EcoDose 2K** unit is an electronic dosing system suitable for high and low pressure applications. It can be used in manual and automatic processes. Optimized for quick color changes and easy flushing, it enhances resource utilization and contributes to higher application efficiency. Fluids are measured consistently and precisely, even media with different viscosities. Typical fluids handled are 1K or 2K materials, water and solvent-borne paints, varnishes, lacquers and monolayer paints.




TECHNICAL ILLUSTRATION

	EcoDose 2K
Part No.	N10100003V
Max. fluid pressure	20 / 160 / 200 bar (290 / 2,320 / 2,900 psi)
Flow rate	40 – 4.000 cc/min *
Fluid viscosity range	30 – 2.000 mPas (cps) **
Mixing ratio	1:0 / 1:1 – 30:1
Flow meter type	Coriolis / Gear wheel
Temperature measurement	Yes (Coriolis only) - upon request

* Depending on flow meter type and fluid technical specs.
(viscosity, paint supply equipment and pressures, ...)


** Range to be considered as general indication, actual values
depending on job related paintshop conditions

CONNECTION SCHEME

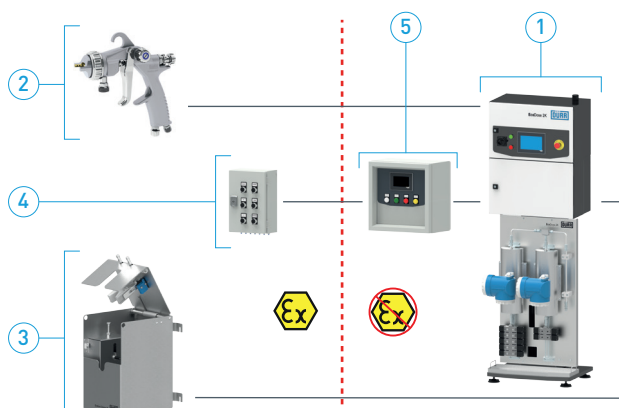

1 EcoDose 2K, 2 EcoGun, 3 Spray gun cleaner, 4 Pneumatic remote control,
5 Remote control HMI

TECHNICAL ILLUSTRATION

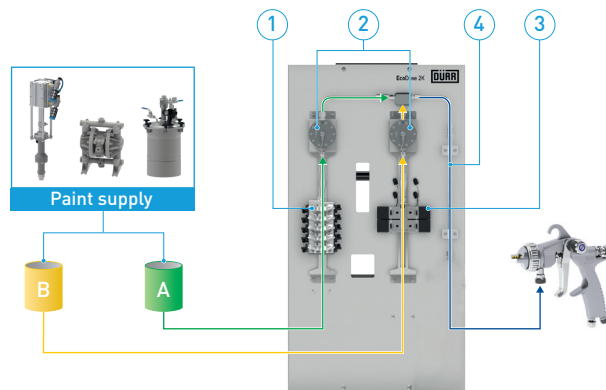

1 Color change block component A, 2 Flow control / Measuring cell component A & B
3 Color change block component B, 4 Static mixer component A & B

CUSTOMER BENEFITS



Flow rate measurement by Coriolis or
gear flow measuring cell

Exact volumetric dosing of both
components

Constant and precise accuracy of the
mixing ratio

Monitoring of all dosing functions such as
pot life, flow- / mixing ratio of the single
and mixed components incl. dedicated
alarms

Automatic color change

Independent flushing circuits for both
components

No premixing chamber

Implementation and control of the
EcoDose 2K via higher level control
possible

Intuitive user interface for quick
programming of individual settings

High process reliability

Automatic flow control with programmed
setpoint [cc/min] available without
additional hardware

Optional remote diagnosis and remote
control available

EcoDose 3K

Dosing units for three component materials

The Dürr **EcoDose 3K** unit is an electronic dosing system suitable for high and low pressure applications. It can be used in manual and automatic processes. Optimized for quick color changes and easy flushing, it enhances resource utilization and contributes to higher application efficiency. Fluids are measured consistently and precisely, even media with different viscosities. Typical fluids handled are 1K, 2K or 3K materials, water and solvent-borne paints, varnishes, lacquers and monolayer paints.




PRODUCT LINE

	EcoDose 3K
Part No.	N10110001V
Max. fluid pressure	20 / 160 / 200 bar (290 / 2,320 / 2,900 psi)
Flow rate	40 – 4,000 cc/min *
Fluid viscosity range	30 – 2,000 mPas (cps) **
Flow meter type	Coriolis / Gear wheel
Temperature measurement	Yes (Coriolis only) - upon request

* Depending on flow meter type and fluid technical specs. (viscosity, paint supply equipment and pressures, ...)


** Range to be considered as general indication, actual values depending on job related paintshop conditions

CONNECTION SCHEME

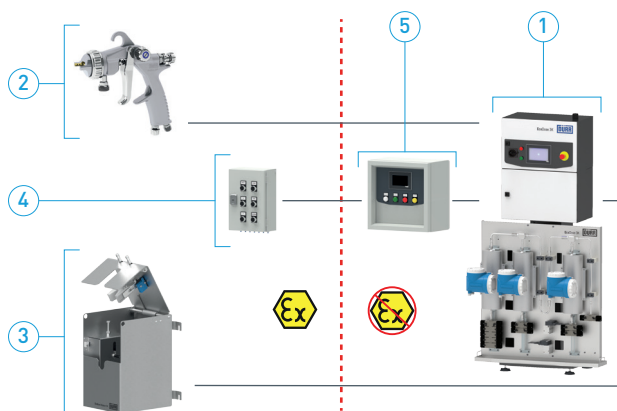

1 EcoDose 3K, 2 EcoGun, 3 Spray gun cleaner, 4 Pneumatic remote control, 5 Remote control HMI

TECHNICAL ILLUSTRATION

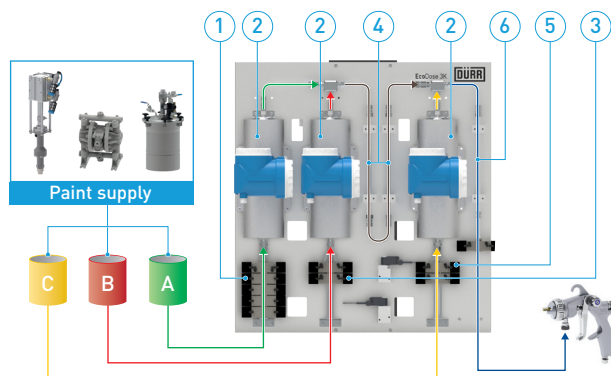

1 Color change block component A, 2 Flow control / Measuring cell component A / B & C, 3 Color change block component B, 4 Static mixer component A & B, 5 Color change block component C, 6 Static mixer component A/B & C

CUSTOMER BENEFITS



Flow rate measurement by Coriolis or gear flow measuring cell

Exact volumetric dosing of all three components

Constant and precise accuracy of the mixing ratio

Monitoring of all dosing functions such as pot life, flow / mixing ratio of the single and mixed components incl. dedicated alarms

Automatic color change

Independent flushing circuits for both components

No premixing chamber

Implementation and control of the EcoDose 3K via higher level control possible


Intuitive user interface for quick programming of individual settings

High process reliability

Automatic flow control with programmed setpoint [cc/min] available without additional hardware

Optional remote diagnosis and remote control available

NEW

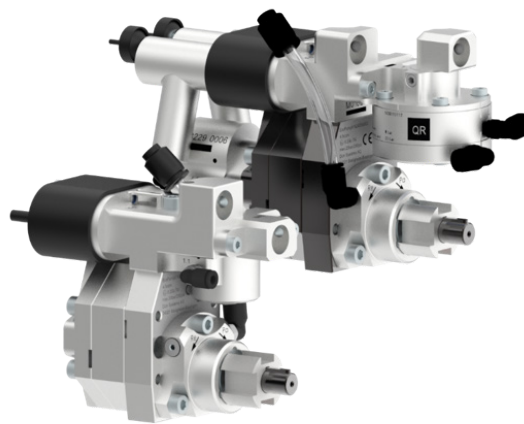

Pumps

Pump solutions for any kind of application



Product families

- EcoPump HP** - air operated horizontal piston pumps
- EcoPump HPE** - electrical operated horizontal piston pumps
- EcoPump VP** - air operated vertical piston pumps
- EcoPump VPS** - air operated vertical shovel plate pumps
- EcoPump AD** - air operated diaphragm pumps
- EcoPump9 GW** - gear wheel dosing pumps
- EcoPump Packages** - ready to use sets

EcoPump HP

Air operated horizontal piston pumps

The **EcoPump HP** is an air driven horizontal piston pump. It has been manufactured and tested according to Dürr's well-proven quality standards. Performance and durability are further distinguishing characteristics in order to meet the highest demands. With a concealed shaft seal this **EcoPump HP** is primarily designed for paint circulation systems as well as fluid transfer and supply. A horizontal two piston design guarantees equal thrust on both strokes and a rapid pump change-over with a quick release valve for reduced surge. Its modular design enables easy maintenance. Typically handled fluids are water and solvent-borne paints, varnishes, enamels and lacquers.




PRODUCT LINE

	EcoPump HP 400 21	EcoPump HP 800 21	EcoPump HP 1600 21
Part No.	N24160008	N24160009	N24160010
Weight	45.0 kg	54.4 kg	94.0 kg
Connector inlet / outlet	EcoTube DN25 (female) *	EcoTube DN25 (female) *	EcoTube DN25 (female)*
Connector air	G3/8" (female)	G3/8" (female)	G3/4" (female)
Displacement	400 cc/cycle	800 cc/cycle	1,600 cc/cycle
Ratio	3.5:1	3.5:1	3.5:1
Max. fluid pressure	21 bar (305 psi)	21 bar (305 psi)	21 bar (305 psi)
Flow rate @ rec. cycles	8 l/min (2.1 gal/m)	16 l/min (4.2 gal/m)	32 l/min (8.5 gal/m)
Recommended cycles	20 cyc/min **	20 cyc/min **	20 cyc/min **
Max. air pressure	6.0 bar (87 psi)	6.0 bar (87 psi)	6.0 bar (87 psi)

* Sanitary type fluid ports are available as an option. ** Cycles for continuous operation and partial load.

TECHNICAL ILLUSTRATION

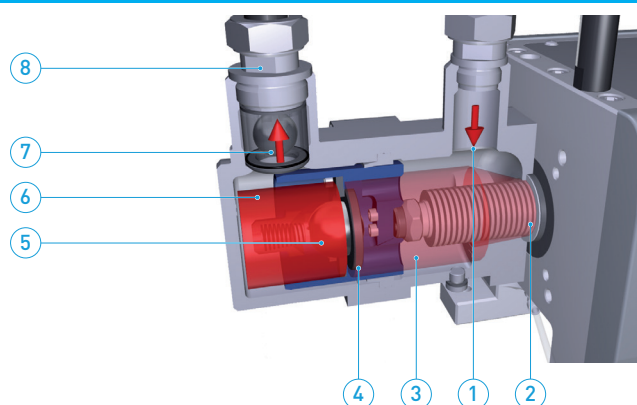

HP & HPE pump principle
1 Material inlet, **2** Bellows, **3** Material suction chamber, **4** Piston, **5** Piston ball seat,
6 Material outlet chamber, **7** Material outlet ball seat, **8** Material outlet

CUSTOMER BENEFITS



Balanced pressure variations

Stainless steel fluid section

Tested according to DIN EN 12162 and well-proven Dürr quality standards

Low icing by thermal isolation of the muffler and optimized air flow

Four-ball design

No exposed shaft seal

Lubricant free

Horizontal two-piston design guarantees equal thrust on both strokes

Rapid pump change-over with quick release valve for reduced surge


Modular pump design, easy to maintain

Wide range of accessories available

EcoPump HPE

Electrical operated horizontal piston pumps

The **EcoPump HPE** is a horizontal piston pump with an electric drive to achieve superior performance with lower operating costs. It has been manufactured according to Dürr's well-proven quality standards. Durability and reliability are further distinguishing characteristics in order to meet the highest demands. With a concealed shaft seal the **EcoPump HPE** is primarily designed for paint circulation systems as well as fluid transfer and supply. A horizontal two piston design guarantees equal thrust on both strokes. Its modular design enables easy maintenance. Typically handled fluids include water and solvent-borne paints, varnishes, enamels and lacquers. The **EcoPump HPE** has been tested according to DIN EN 12162.

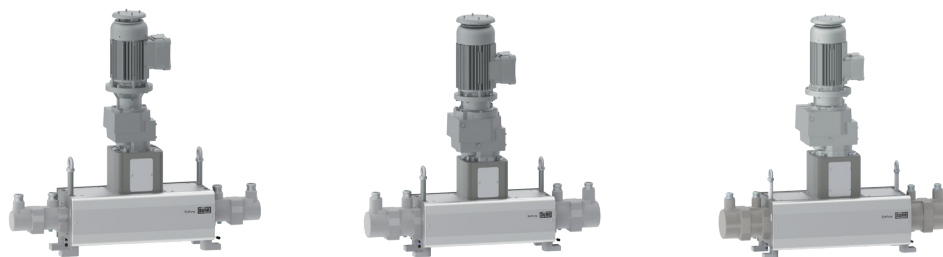


PRODUCT LINE

	EcoPump HPE 400 21	EcoPump HPE 800 21	EcoPump HPE 1600 21
Part No.	N24260021	N24260022	N24260023
Weight	158 kg	188 kg	340 kg
Connector inlet / outlet	EcoTube DN25 (male) *	EcoTube DN25 (male) *	EcoTube DN25 (male) *
Displacement	400 cc/cycle	800 cc/cycle	1,600 cc/cycle
Parts contacted by media	Stainless steel	Stainless steel	Stainless steel
Max. fluid pressure	21 bar (305 psi)	21 bar (305 psi)	21 bar (305 psi)
Flow rate @ rec. cycles	8 l/min (2.1 gal/m) **	16 l/min (4.2 gal/m) **	32 l/min (8.4 gal/m) **
Rated power	0.75 kW	1.50 kW	3.00 kW

* Sanitary type fluid ports are available as an option. ** Cycles for continuous operation and partial load.

TECHNICAL ILLUSTRATION

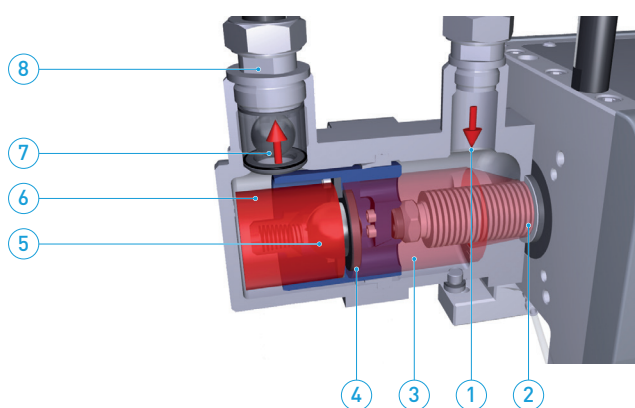

HP & HPE pump principle

1 Material inlet, 2 Bellows, 3 Material suction chamber, 4 Piston, 5 Piston ball seat, 6 Material outlet chamber, 7 Material outlet ball seat, 8 Material outlet

CUSTOMER BENEFITS



Tested according to DIN EN 12162 and well-proven Dürr quality standards

Electrical drive provides superior performance with lower operating costs

Stainless steel fluid sections

Four-ball design

No exposed shaft seal

Lubricant free

Horizontal two-piston design guarantees equal thrust on both strokes

Modular pump design, easy to maintain

ATEX Ex II 2G Ex h IIA T4 Gb X

EcoPump2 VP

NEW

Air operated vertical piston pumps

The **EcoPump2 VP** is a pneumatically driven vertical piston pump for medium and high pressure applications. Proven design and long term durability make these pumps the perfect choice for small and middle applications of paint, mastics and adhesives to furniture, steel structures or walls and other objects. The **EcoPump2 VP** is suitable for airless or air-assist application and is available in numerous configurations with various air inlet modules, pressure relief valves, trolleys and adjacent devices.



Watch
product
video



PRODUCT LINE

	EcoPump2 VP 40 230	EcoPump2 VP 80 120	EcoPump2 VP 80 300	EcoPump2 VP 120 80	EcoPump2 VP 120 200
Part No.	N24170034	N24170035	N24170036	N24170037	N24170039
Weight	16.7 kg	19.5 kg	28.5 kg	22.5 kg	31.5 kg
Transmission Ratio	33:1	17:1	44:1	11:1	29:1
Volume/Cycle	40 cc/cycle	80 cc/cycle	80 cc/cycle	120 cc/cycle	120 cc/cycle
Flow Rate max. [durable]	0.8 l/min	1.6 l/min	1.6 l/min	2.4 l/min	2.4 l/min
Material pressure max.	230 bar (3336 psi)	120 bar (1740 psi)	300 bar (4351 psi)	80 bar (1160 psi)	200 bar (2901 psi)
Connection Outlet	G3/8"	G3/8"	G3/8"	G3/8"	G3/8"
Air pressure max.	7.0 bar (87 psi)	7.0 bar (87 psi)	7.0 bar (87 psi)	7.0 bar (87 psi)	7.0 bar (87 psi)
Operating Temp. max.	10 - 60 °C (50 - 140 °F)	10 - 60 °C (50 - 140 °F)	10 - 60 °C (50 - 140 °F)	10 - 60 °C (50 - 140 °F)	10 - 60 °C (50 - 140 °F)

* Cycles for continuous operation and partial load.

TECHNICAL ILLUSTRATION

One changeover valve for all pumps

Lubrication-free changeover valve

Ice reduction kit - optional

Maintenance friendly and modular air motor

Optional sensors for stroke detection

Extremely smooth piston rod surface
for increased service life

Captive coupling


No cover required – Stocking optional

Fluid outlet turnable in 90° steps

Easy to clean shape

Acid resistant stainless steel

Special tool-free fluid inlet

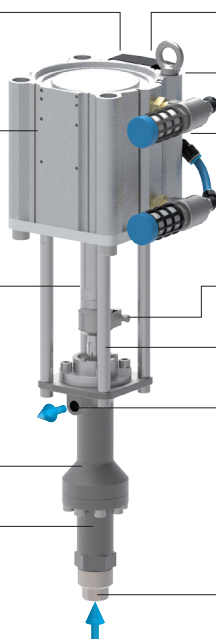

EcoPump VP

Air operated vertical piston pumps




Watch
product
video



	EcoPump VP 500 180 SST PU	EcoPump VP 500 270 SST PU	EcoPump VP 250 360 SST PU	EcoPump VP 1000 90 SST PU	EcoPump VP 1000 135 SST PU
Part No.	N24170027	N24170028	N24170025 N24170026 - PE packing	N24170029	N24170030
Weight	83.9 kg	103.4 kg	56.1 kg	89.0 kg	123.0kg
Connector inlet / outlet	G2" / G1½" (female)	G2" / G1½" (female)	G1½" / G1" (female)	G2" / G1½" (female)	G2" / G1½" (female)
Connector air	G3/4" (female)	G3/4" (female)	G3/4" (female)	G3/4" (female)	G3/4" (female)
Displacement	500 cc/cycle	500 cc/cycle	250 cc/cycle	1,000 cc/cycle	1,000 cc/cycle
Ratio	30:1	45:1	60:1	15:1	23:1
Max. fluid pressure	180 bar (2,611 psi)	270 bar (3,915 psi)	360 bar (5,220 psi)	90 bar (1,305 psi)	135 bar (1,958 psi)
Flow rate @ rec. cycles	5 l/min (1.32 gal/m)	5 l/min (1.32 gal/m)	2.5 l/min (0.66 gal/m)	10 l/min (2.6 gal/m)	10 l/min (2.6 gal/m)
Recommended cycles*	10 cyc/min	10 cyc/min	10 cyc/min	10 cyc/min	10 cyc/min
Max. air pressure	6.0 bar (87psi)	6.0 bar (87psi)	6.0 bar (87 psi)	6.0 bar (87 psi)	6.0 bar (87 psi)

* Cycles for continuous operation and partial load.



VP PUMP PACKINGS

	Standard	Standard
Part No.	N24960070 + N24960071	N24960184 + N24960185
Compatible pumps	EcoPump VP 250 360 (N24170025)	EcoPump2 VP 40 230 (N24170034)
Usage	Water-borne paint and water-borne wax, acidic catalysts.	Water based and Solvent based paints, cleaning detergents, clearcoats and hardeners (also with catalytic acids)
Material	PU, EPDM, PTFE, Brass	PE, PTFE-Graphite



	Standard	Standard
Part No.	N24960189 + N24960190	N24960192 + N24960193
Compatible pumps	EcoPump2 VP 80 120 (N24170035) EcoPump2 VP 80 300 (N24170036)	EcoPump2 VP 120 80 (N24170034) EcoPump2 VP 120 200 (N24170039)
Usage	Water based and Solvent based paints, cleaning detergents, clearcoats and hardeners (also with catalytic acids)	Water based and Solvent based paints, cleaning detergents, clearcoats and hardeners (also with catalytic acids)
Material	PE, PTFE-Graphite	PE, PTFE-Graphite


EcoPump AD

Air operated diaphragm pumps

A wide choice of materials for the pump housing makes the **EcoPump AD** the best solution for different kinds of fluid handling such as abrasive and particle containing fluids. The typical field of application of the **EcoPump AD** is to handle oil, water, waste liquids with and without solid particle debris, water and solvent-borne paints, varnishes, enamels and lacquers. The **EcoPump AD** pump will operate in circulation or direct fluid delivery mode. The simple design of **EcoPump AD** allows easy maintenance and service.



Watch
product
video

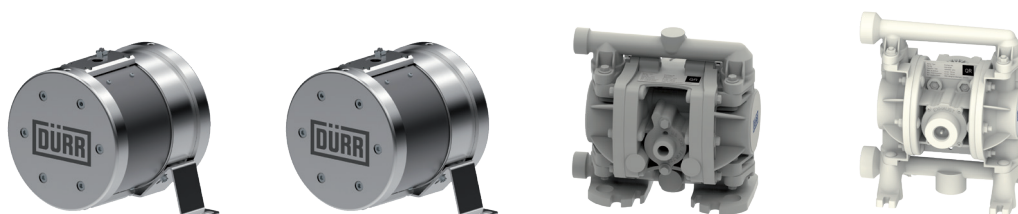

PRODUCT LINE

	EcoPump AD 150 21 SST 3/8"	EcoPump AD 150 21 SST 3/8"	EcoPump AD 72 8 ACE 1/4"	EcoPump AD 83 6,9 ACE 3/8"
Part No.	N24140013	N24140014	N24140005	N24140006
Weight	19.8 kg	19.8 kg	1.6 kg	1.9 kg
Connector inlet / outlet	G3/8" / G3/4" (female)	G3/8" / G3/4" (female)	G1/4" (female)	G3/8" (female)
Connector air	G1/4" (female)	G1/4" (female)	1/4" NPT (female)	1/4" NPT (female)
Displacement	150 cc/cycle	150 cc/cycle	72 cc/cycle	83 cc/cycle
Ratio	3:1	3:1	1:1	1:1
Max. fluid pressure	21 bar (305 psi)	21 bar (305 psi)	8.6 bar (125 psi)	6.9 bar (100 psi)
Flow rate max.*	3.0 l/min (0.78 gal/min)	3.0 l/min (0.78 gal/min)	6.5 l/min (1.7 gal/min)	13 l/min (3.4 gal/min)
Parts contacted by media	Stainless steel, POM	Stainless steel, PTFE	Acetal, PTFE	Acetal, PTFE

* strongly dependent on the material



	EcoPump AD 150 6,9 SST 1/2"	EcoPump AD 150 7 ACE 1/2"	EcoPump AD 150 7 ALU 1/2"
Part No.	N24140007	N24140008	N24140009
Weight	6.6 kg	4.0 kg	3.8 kg
Connector inlet / outlet	G1/2" (female)	1/2" NPT (female)	G1/2" (female)
Connector air	1/4" NPT (female)	1/4" NPT (female)	1/4" NPT (female)
Displacement	150 cc/cycle	150 cc/cycle	150 cc/cycle
Ratio	1:1	1:1	1:1
Max. fluid pressure	6.9 bar (100 psi)	6.9 bar (100 psi)	6.9 bar (100 psi)
Flow rate max.*	16 l/min (4.2 gal/min)	16 l/min (4.2 gal/min)	16 l/min (4.2 gal/min)
Parts contacted by media	Stainless steel, PTFE	Acetal, PTFE	Stainless steel, Al, PTFE

* strongly dependent on the material

EcoPump AD

Air operated diaphragm pumps



PRODUCT LINE			
	EcoPump AD 600 8 SST 1"	EcoPump AD 600 8 ALU 1"	EcoPump AD 2420 8 SST 1 1/2"
Part No.	N24140004	N24140010	N24140011
Weight	16.3 kg	8.6 kg	38.3 kg
Connector inlet / outlet	G1" (female)	G1" (female)	G1½" (female)
Connector air	1/4" NPT (female)	1/4" NPT (female)	1/2" NPT (female)
Displacement	600 cc/cycle	600 cc/cycle	2,420 cc/cycle
Ratio	1:1	1:1	1:1
Max. fluid pressure	8.3 bar (120 psi)	8.3 bar (120 psi)	8.3 bar (120 psi)
Flow rate max. *	44 l/min (11.6 gal/min)	44 l/min (11.6 gal/min)	113 l/min (29.8 gal/min)
Parts contacted by media	Stainless steel, PTFE	Stainless steel, Al, PTFE	Stainless steel, PTFE


* strongly dependent on the material

CUSTOMER BENEFITS



- Selected choice of materials for housing
- Easy maintenance and service
- Highly flushable
- Suitable for abrasive fluids and media containing solids

TECHNICAL ILLUSTRATION

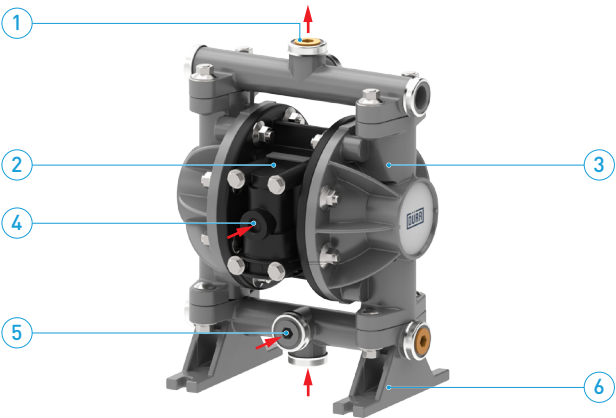

1 Material outlet, 2 Pneumatic part, 3 Fluid part, 4 Air inlet, 5 Material inlet, 6 Mounting feet

EcoPump2 VP Package

New generation of high-pressure spray package

Pumps

- new generation of high pressure pumps
- five types available
- max. pressure range from 80 to 300 bars
- optional ice reduction kit

Maintenance units

- Air Assist or Airless
- optional nozzle cleaner

optional

Pressure regulator

- fine pressure regulation
- pressure gauge

Pressure release unit

- flexible hose
- direct fix outlet

Fluid feeding units

- direct suction
- flexible suction (up to 200 L barrels)
- vessel (6 liter)

Racks

- one trolley fits to all pumps
- wall mount

Fluid outlet manifold

- up to 3 spray guns
- integrated pressure gauge

optional

High-pressure filter

- up to 500 bar
- four outlets available
- elimination of pulsation

VARIANT EXAMPLES



Order code	EcoPump2 VP Package -VP2-AA-DC-Y-Y-Y	EcoPump2 VP Package -VP4-AL-F6L-Y-Y-Y	EcoPump2 VP Package -VP3-AL-F6L-Y-Y-Y	EcoPump2 VP Package -VP3-AA-L05-Y-Y-Y
Pump	EcoPump2 VP 80 120	EcoPump2 VP 120 80	EcoPump2 VP 80 300	EcoPump2 VP 80 300
Application	Air-Assist	Airless	Airless	Air-Assist
Suction module	Direct suction	Feed Cup 6L	Feed Cup 6L	Lance 0.5m with hose 0.85m
Trolley	Yes	Yes	No	Yes
Pressure regulator	Yes	Yes	Yes	Yes
High-pressure filter	Yes	Yes	Yes	Yes

EcoPump AD Package

Modules overview

1 Diaphragm pumps

Air operated diaphragm pumps are available in different design configurations.

2 Maintenance units

Used for inlet air regulation. Regulator can be also used to control air pressure for connected spray gun.

3 Material feeding

- Direct suction
- Flexible suction
- Feed cup (6 liters)



4 High pressure filter

High pressure filter is used for filtration of fluid on pump outlet. It has also a function of pulse damper.






5 Fluid regulator

Optional fluid regulator allows to adjust the outlet material pressure precisely. May be optionally equipped with pressure gauge.



6 Racks

- Trolley
- Mobile stand
- Wall mount



AVAILABLE PUMPS

	EcoPump AD 72 8,3 Ace PTFE 1/4"	EcoPump AD 83 6,9 Ace PTFE 3/8"	EcoPump AD 150 6,9 SST PTFE 1/2"
Part No.	N24140005	N24140006	N24140007
Displacement	72 cc/cycle	83 cc/cycle	150 cc/cycle
Max. fluid pressure	8.6 bar (125 psi)	6.9 bar (100 psi)	6.9 bar (100 psi)
Max. flow rate durable	6.5 l/min (1.72 gal/min)	13 l/min (3.43 gal/min)	16 l/min (4.22 gal/min)
Parts contacted by media	Acetal, PTFE	Acetal, PTFE	Stainless steel, PTFE



RAMs

High viscosity paint supply

Product families

EcoRAM 60 – high viscosity supply system

EcoRAM 200 – high viscosity supply system



EcoRAM

High viscosity paint supply system


This drum press can be ordered with our EcoPump VP or our shovel plate pump **EcoPump VPS**. It is the perfect material supply system for high viscous 1K material from the original barrel.



PRODUCT LINE		
	EcoRAM 60	EcoRAM 200
Part No.	N68530002V	N68540002V
Max. dimensions [HxWxL]	695x420x2,013 mm [depends on the config.]	1,120x1,443x2,334 mm [depends on the config.]
Max. height barrel	2,437 mm [96"]	2,886 mm [114"]
Max. air pressure	8.0 bar [116 psi]	8.0 bar [116 psi]
Connector air	Depends on the control unit	Depends on the control unit
Plate material	Aluminium cast and PU	Aluminium cast and NVC
Ambient operating temperature	10-40 °C	10-40 °C
Max. flow rate	Depends on the used pump	Depends on the used pump
Diameter barrel	360 mm, 279 mm	571 mm

Product upon request.

TECHNICAL ILLUSTRATION

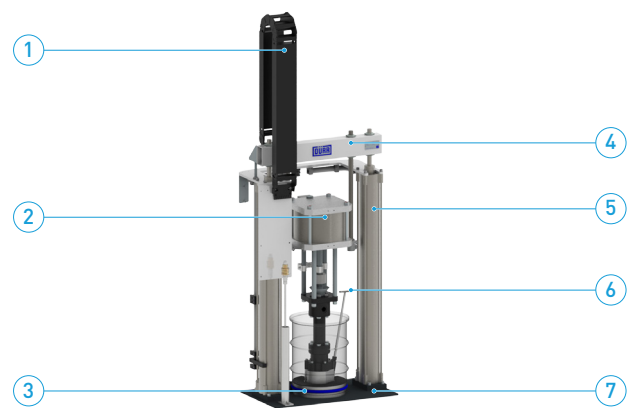

1 Power chain, 2 Pneumatic motor, 3 Follower plate, 4 Lifter, 5 Pneumatic cylinders, 6 Ventilation bar, 7 Ground plate

CUSTOMER BENEFITS



To supply high viscous material from up to 60 l barrels and up to 200 l barrels

Two lift cylinders for an exact guidance and a constant power transmission


Different follower plates for several barrel types

Simple and compact pneumatical control system

High flexibility regarding the medium due to various available pumps

Different complexities of sensor systems, adaptable for the scope of application

Available from a simple to a complex version

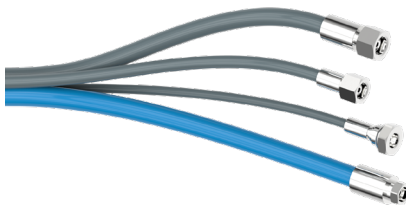

Fluid handling

Products

EcoFlow – fluid regulation for paint process systems


Pressure relief valves – protection device against pressure peaks

Agitators – manual air operated agitators

Filters – low and high pressure material filters

Pressure gauges – vertical, horizontal, bottom or back connection fluid pressure gauges

Hoses & Fittings – air or fluid hoses and fittings

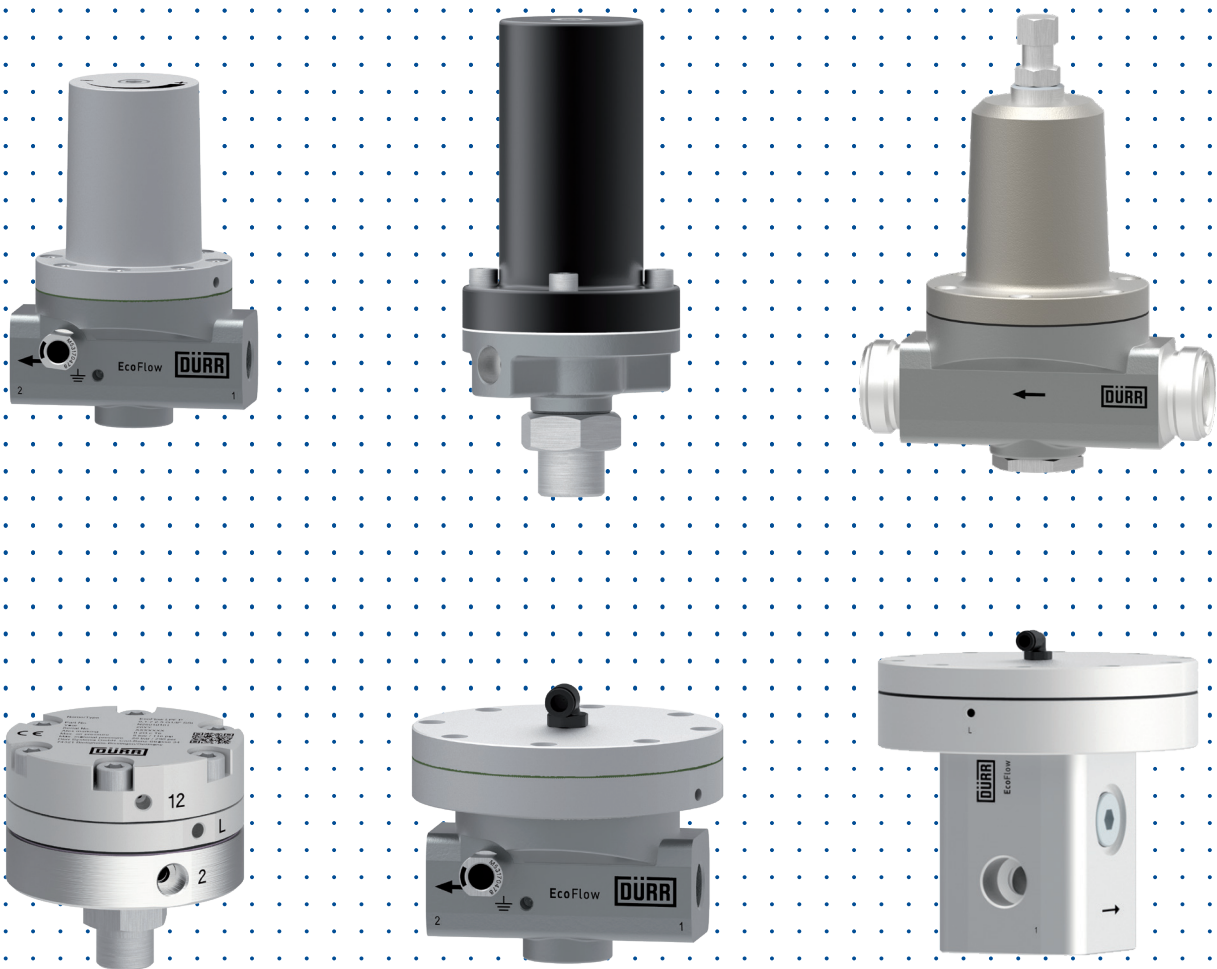

Pressure regulators

Fluid regulation for paint process systems

Product families


EcoFlow HPF – high pressure flow regulators

EcoFlow HPR – high pressure return regulators

EcoFlow LPF – low pressure flow regulators

EcoFlow LPR – low pressure return regulators



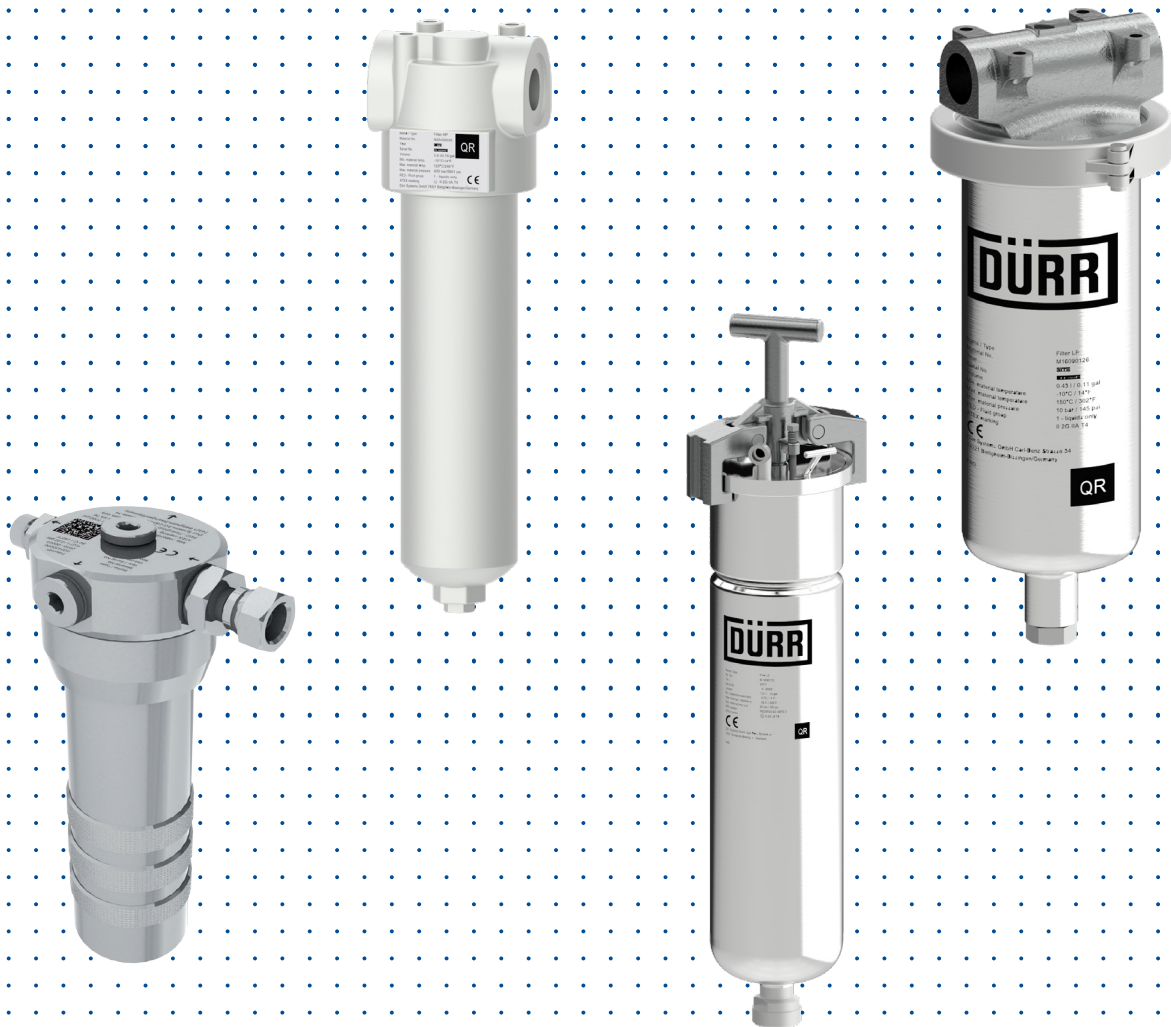

Filters

Material filtering

Product families

Filters HP – high pressure material filters

Filters LP – low pressure material filters



Filters HP

High pressure material filters

High pressure filters can be used for the filtration of paint or any other kind of fluid. Several different filter sizes are available. The filter design allows a tool free filter maintenance. Up to four devices can be connected (three on the sides, one on the bottom). Due to its robust design the filter can be used in low and high pressure applications with a maximum fluid pressure of up to 500 bar (7,250 psi). Additionally the filter helps to reduce the fluids' pressure pulsation.




PRODUCT LINE			
	HP filter 500µm 500bar M16/16	HP filter 250µm 500bar M16/16	HP filter 149µm 500bar M16/16
Part No.	N35430015	N35430019	N35430023
Max. fluid pressure	500 bar (7,250 psi)	500 bar (7,250 psi)	500 bar (7,250 psi)
Connector inlet / outlet	M16x1.5 / M16x1.5 (female / male)	M16x1.5 / M16x1.5 (female / male)	M16x1.5 / M16x1.5 (female / male)
Filter type	Screen filter	Screen filter	Screen filter
Filter mesh	500 µm	250 µm	149 µm



	HP filter 74µm 500bar M16/16	HP filter 105µm 500bar M16/16	High pressure filter 400bar G3/4\"C-St
Part No.	N35430027	N35430031	N35430030
Max. fluid pressure	500 bar (7,250 psi)	500 bar (7,250 psi)	400 bar (5,800 psi)
Connector inlet / outlet	M16x1.5 / M16x1.5 (female / male)	M16x1.5 / M16x1.5 (female / male)	G3/4\" (female)
Filter type	Screen filter	Screen filter	Screen filter
Filter mesh	74 µm	105 µm	500 µm

TECHNICAL ILLUSTRATION

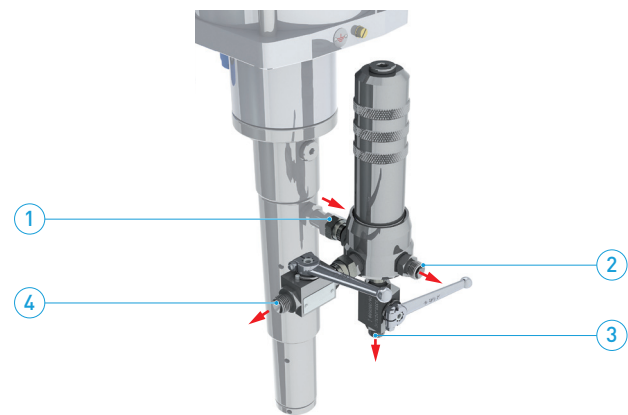

1 Inlet, connected to VP pump, 2 Side outlet: primary spray gun, 3 Bottom outlet, closing valve for pressure release hose, 4 Side outlet, closing valve for secondary spray gun, **Note:** Upside down position ensures pulsation elimination.

CUSTOMER BENEFITS



- Suitable for low- and high pressure applications of up to 500 bar (7,250 psi)
- Up to four fluid outlets
- Tool less filter cartridge exchange
- Multiple filtration elements
- Reduction of pulsation
- Made of stainless steel