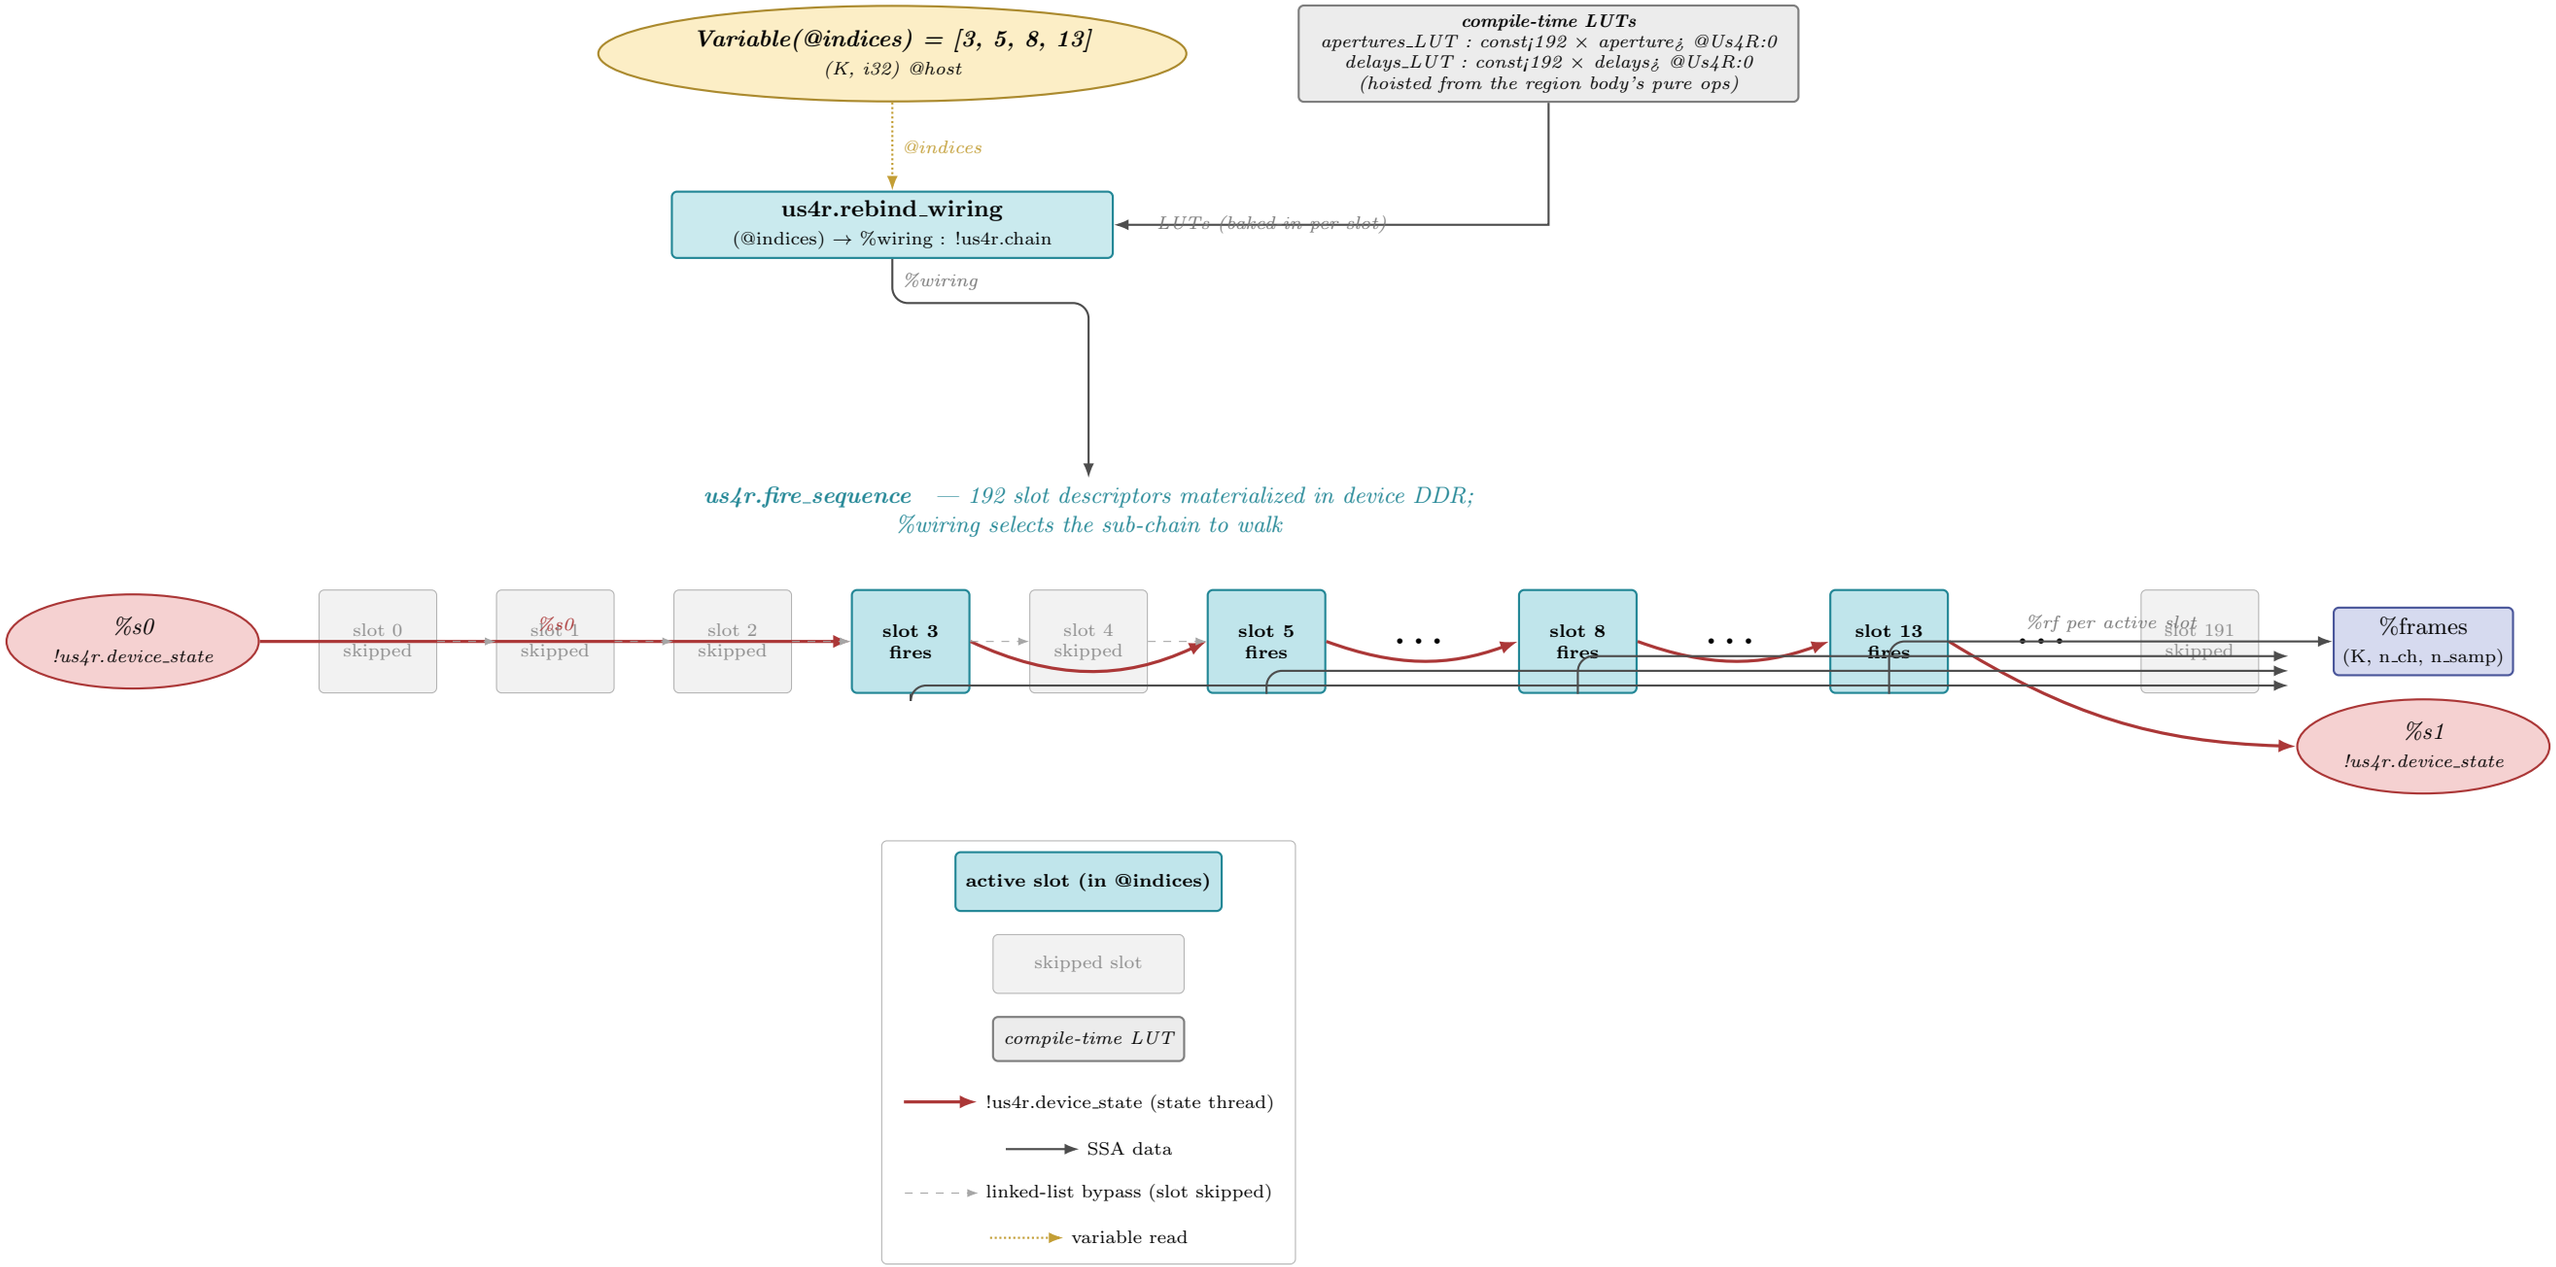

Variable(@indices) = [3, 5, 8, 13]
(K, i32) @host
compile-time LUTs
apertures_LUT : const¡192 × aperture¿ @Us4R:0
delays_LUT : const¡192 × delays¿ @Us4R:0
(hoisted from the region body's pure ops)
@indices
us4r.rebind_wiring
(@indices) → %wiring : !us4r.chain
LUTs (baked in per slot)
%wiring
us4r.fire_sequence — 192 slot descriptors materialized in device DDR;
%wiring selects the sub-chain to walk
%s0
!us4r.device_state
slot 0
skipped
slot 1
skipped
slot 2
skipped
slot 3
fires
slot 4
skipped
slot 5
fires
slot 8
fires
slot 13
fires
%rf per active slot
slot 191
skipped
%frames
(K, n_ch, n_samp)
%s1
!us4r.device_state
active slot (in @indices)
skipped slot
compile-time LUT
!us4r.device_state (state thread)
SSA data
linked-list bypass (slot skipped)
variable read