


BOOKLET FOR COMPLETE PRODUCT LINES

Bau GUM LINE

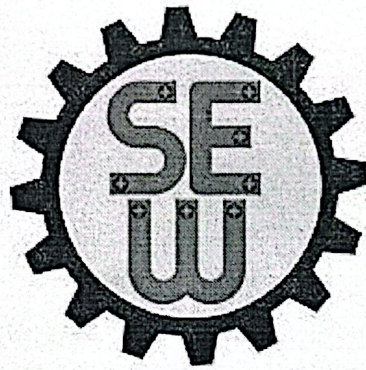

Starmers
Engineering Works

Ball Gum Production Line

1. Sugar Grinder
2. Heating Cabinet
3. Bubble Gum Mixer
4. Rest Table
5. Trolley
6. Bubble Gum Extruder
7. Single Step Cooling Conveyor
8. Ball Forming Machine
9. Running Ball Conveyor
10. Vibrator
11. Coating Pan
12. Pillow Wrapping Machine

1.Sugar Grinder SEW-701

Trait:

A sugar grinder converts crystal sugar into fine uniform powder to ensure smooth dough formation, efficient blending with gum base and consistent product texture in bubble gum production.

Specification:

- Storage Capacity: 500 kg
- Grinder 45 Number
- Motor Power 15 hp
- Inner Box SS 303
- Outer Box M.S
- Dimensions 4 w x 6 l Dimension: 4 w x 6 l

Power Load: 15 hp

Weight:

2. Heating Cabinet

Trait:

A heating cabinet maintains controlled temperature to pre-soften and condition the gum mass, ensuring smooth shaping, uniform elasticity, and stable processing in the bubble gum line.

Specification:

- 5 trays
- Outer sheets in M.S
- Inner sheets SS 304
- Double jacketed with glass wool
- Heaters and blower total load 10 hp

Dimension: 3'x3'x 6'

Weight:

Power Load: 10hp

3. Bubble Gum Mixer

Traits:

The bubble gum mixer is used to blend all the raw ingredients into a homogeneous gum base mass suitable for further processing (like extrusion and shaping).

Specification:

1. Capacity: 100 kg in 20 min ✓
2. Pan: In S.S 304 ✓
3. Double jacketed ✓
4. Double jacketed with: ~~M.S~~ S.S 304 ✓
5. Z-arm: S.S 304 ✓
6. Pan cover: In S.S 304 ✓
7. Gear motor main drive: 20 hp ✓
8. Heavy duty: M.S structure ✓
9. Electric heaters: 6000 watt ✓
10. Electric panel: With all new features ✓
11. ~~Side sheets: S.S 201~~
12. Tilting system: ~~included~~ gear motor 2hp ✓

* Dimensions (H \times W \times L): 6'x8'x8'

* Power Load: 28 hp

4. Rest table

Trait:

- For a temporary rest of the gum ^{Base} batch coming from the mixer. ✓

Specifications:

- Base Plate thickness 10mm in S.S 304 ✓
- Legs 4 Nos in S.S 201 ✓

Dimension: 3ft*6ft ✓

Weight:

Power load: 0hp ✓

5.Trolley

Trait:

It is used to safely transfer the hot, viscous gum base mass from the mixer to the extruder, ensuring continuous material flow and preventing contamination or handling delays in the bubble production line. ✓

Specifications:

- For moving the gum base mass from mixer to extruder ✓
- 3ft length ✓
- 3ft width ✓
- Pan in S.S 304 ✓
- Trolley stand M.S ✓

Dimension: ✓

Weight: ✓

Power Load: 0hp ✓

6. Bubble Gum Extruder

Traits

The bubble gum extruder shapes the mixed gum mass into a continuous rope or sheet with uniform thickness, texture, and density—making it suitable for further forming (cutting, rolling, or shaping).

It essentially transforms the soft, irregular gum from the mixer into a consistent product form for downstream processing.

Specifications

1. 1 rope
2. 2 Worms
3. 7.5 hp gear motor drive
4. 10 hp inverter
5. M.S structure
6. keef in S.S 304
7. Electric heaters: 6000 watt
8. Electric panel with all new features
9. Helping roller system in keef

* Dimension:

* Power Load: 18 hp

7.Single step Cooling Conveyor

Trait:

The cooling conveyors are designed for high-performance precision cooling of a wide range of ball and ac cylindrical pieces, while retaining the original pieces, shape and quality.

Specifications:

- * Function All types of Bubble Gum
- * Belt Size W 660mm * L 4875mm
- * Belt Type White Food Grade
- * Motor Power 0.75kw
- * Invertor 0.75kw
- * Air system With 3 fans
- * Structure Ms Heavy Pipe 14g
- * Totally Covered with stainless Steel Sheet
- * Control Panel with all New Features

Dimension:

Weight:

Power Load:

8. Ball Gum Forming Machine:

Trait:

The ball bubble gum forming process can be producing ball and other spheroids solid or hollow form with or without filling. This bubble gum ball forming machine can make many kinds of different shapes bubble gums, such as: spherical, ellipse, watermelon, dinosaur egg, flagon and so on.

Specifications:

Function: All Type of Ball Shape Bubble Gums

- * Roller material: 4140 hard mold material
- * Roller Mold Size: On Demand
- * Roller Length: 850 mm
- * Gear Motor: 1.5 kw (3pcs)
- * Verm Gear: 80 Number
- * Motor Power: 1.5kw
- * Inverter: 3hp (3pcs)
- * Sizer Step: One Step
- * Production Capacity: 30 to 35 stock/min
- * Rollar Gear Material: 8620 with Hardness
- * Control Panel: With all New Features
- * Safety: Totalley Saftey Covers

Dimension:

Weight:

Power Load:

9 = Running Ball
Conveyor.

| O • VIBRATOR FOR BALL GUM

Trait:

This ball gum vibrator helps shape chewing gum evenly as it moves through production. It removes trapped air, keeps the size consistent, and improves the final surface.

It runs smoothly and is easy to control, which helps reduce defects and makes the next steps in the process more efficient.

Specifications:

FUNCTION: ALL TYPES OF BALL GUM

- **CAPACITY: VARIABLE**
- **DRIVE GEAR MOTOR: 1KW**
- **DRIVE INVERTER: 1KW**
- **INNER VIBRATOR: STAINLESS STEEL 304**
- **AIR SYSTEM: WITH FAN'S**
- **WEIGHT: 300KG APPROX**

CONTROL PANEL WITH ALL NEW FEATURES

FULLY ENCLOSED SAFETY COVERS

11-2. Coating Pan

Trait:

Chewing gum is to coating & polishing sugar / chocolate in various shape such as spherical, ellipse, watermelon, dinosaur egg, flagon. Specially, the columnar chocolate after packed by colorized aluminized foil can be also polished in this machine, after polishing, the foil will be wrapped well and smoothly on the products and the shape of the package will be distinct.

Specifications:

- * Function: All Types of Bubble gums ✓
- * Pan material: Stainless steel 304 ✓
- * Drive Motor: 1.5kw ✓
- * Drive Gear: 100 number ✓
- * Blower motor: 0.5 KW ✓
- * Capacity: 100 KG ✓
- * Control Panel: With all New Features ✓
- * Structure: Heavy-Duty MS Structure ✓

Dimension:

Weight:

Power Load:

¹²
~~10~~. PILLOW PACK WRAPPING

Trait:

This machine functions as a high-speed horizontal flow wrapping unit, responsible for accurately feeding, enclosing, heat-sealing, and cutting individual candies into uniform retail-ready packs, serving as the final primary packaging stage in a complete candy production line.

Specifications:

- * OUTPUT: Upto 800 Packs per Minute
- * ELECTRIC MOTORS:
 - * (1) 2 H.P./3-Phase
 - * (2) 1/2 H.P.
- * ELECTRIC HEATERS: 3.2 Kw
- * STANDARD EQUIPMENT: Photo Electric Eye & Inverter
- * DIMENSIONS OF MACHINE (Length x Width x Height): 2,335 x 900 x 1,715 mm
- * WEIGHT: 750 Kg.
- * REEL (Maximum Outer Dia / Core Dia): 280 / 70 mm

Additional Notes (Handwritten):

- * Dimension (H x W x L): 1715 x 900 x 2335 mm

* Weight:

* Dimensions:

~~11/11~~
23/3/26
Approved