


BAZOOKA BUBBLE LINE

BOOKLET FOR COMPLETE PRODUCT LINES

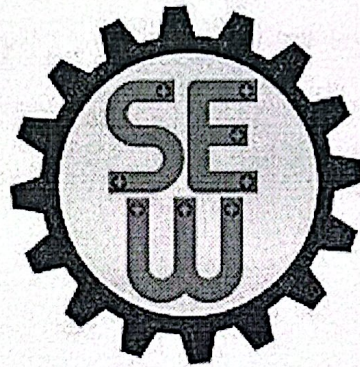

Starmers
Engineering Works

Bazuka Bubble Gum Production Line

1. Sugar Grinder ✓
2. Heating Cabinet ✓
3. Bubble Gum Mixer ✓
4. Rest table ✓
5. Trolly ✓
6. Bubble Gum Extruder ✓
7. Single step Cooling Conveyor ✓
8. Cut & Fold Wrapping ✓

1.Sugar Grinder SEW-701

Trait:

A sugar grinder converts crystal sugar into fine uniform powder to ensure smooth dough formation, efficient blending with gum base and consistent product texture in bubble gum production. ✓

Specification:

- Storage Capacity: 500 kg ✓
- Grinder 45 Number ✓
- Motor Power 15 hp ✓
- Inner Box SS 303 ✓
- Outer Box M.S ✓
- Dimensions 4 w x 6 l Dimension: 4 w x 6 l ✓

Power Load: 15 hp ✓

Weight:

2. Heating Cabinet

Trait:

A heating cabinet maintains controlled temperature to pre-soften and condition the gum mass, ensuring smooth shaping, uniform elasticity, and stable processing in the bubble gum line.

Specification:

- 5 trays
- Outer sheets in M.S
- Inner sheets SS 304
- Double jacketed with glass wool
- Heaters and blower total load 10 hp

Dimension: 3'x3'x 6'

Weight:

Power Load: 10hp

3. Bubble Gum Mixer

Traits:

The bubble gum mixer is used to blend all the raw ingredients into a homogeneous gum base mass suitable for further processing (like extrusion and shaping).

Specification:

1. Capacity: 100 kg in 20 min ✓
2. Pan: In S.S 304 ✓
3. Double jacketed ✓
4. Double jacketed with: ~~M.S~~ S.S 304 ✓
5. Z-arm: S.S 304 ✓
6. Pan cover: In S.S 304 ✓
7. Gear motor main drive: 20 hp ✓
8. Heavy duty: M.S structure ✓
9. Electric heaters: 6000 watt ✓
10. Electric panel: With all new features ✓
- ~~11. Side sheets: S.S 201~~
12. Tilting system: ~~included~~ gear motor 2hp ✓

* Dimensions (H \times W \times L): 6'x8'x8'

* Power Load: 28 hp

4. Rest table

Trait:

- For a temporary rest of the gum ~~box~~ batch coming from the mixer. ✓

Specifications:

- Base Plate thickness 10mm in S.S 304 ✓
- Legs 4 Nos in S.S 201 ✓

Dimension: 3ft*6ft ✓

Weight:

Power load: 0hp

5.Trolley

Trait:

It is used to safely transfer the hot, viscous gum base mass from the mixer to the extruder, ensuring continuous material flow and preventing contamination or handling delays in the bubble production line. ✓ ✓

Specifications:

- For moving the gum base mass from mixer to extruder ✓
- 3ft length ✓
- 3ft width ✓
- Pan in S.S 304 ✓
- Trolley stand M.S ✓

Dimension: ✓

Weight: ✓

Power Load: 0hp ✓

6. Bubble Gum Extruder

Traits

The bubble gum extruder shapes the mixed gum mass into a continuous rope or sheet with uniform thickness, texture, and density—making it suitable for further forming (cutting, rolling, or shaping).

It essentially transforms the soft, irregular gum from the mixer into a consistent product form for downstream processing.

Specifications

1. 1 rope
2. 2 Worms
3. 7.5 hp gear motor drive
4. 10 hp inverter
5. M.S structure
6. keef in S.S 304
7. Electric heaters: 6000 watt
8. Electric panel with all new features
9. Helping roller system in keef

* Dimension:

* Power Load: 18 hp

7. Single step Cooling Conveyor

Trait:

The cooling conveyors are designed for high-performance precision cooling of a wide range of ball and ac ✓
cylindrical pieces, while retaining the original pieces, shape and quality. ✓

Specifications:

- Conveyor 3 ft x 20 ft
- * Function All types of Bubble Gum ✓
- * Belt Size W ~~600mm~~ * L ~~4875mm~~ W 2.5 ft x length 20 ft ✓
- * Belt Type White Food Grade ✓
- * Motor Power ~~0.75kw~~ 2hp
- * Invertor ~~0.75kw~~ 2hp
- * ~~Air system With 3 fans~~
- * Structure Ms Heavy Pipe 14g ✓
- * ~~Totally Covered with stainless Steel Sheet~~
- * Control Panel with all New Features ✓
- Double Jacketed duct on top of Conveyor
- Insulated with thermopore

Dimension: 3 ft x 20 ft

Weight:

Power Load:

8. CUT AND FOLD WRAPPING

Trait:

It's main purpose is to take a continuous wrapping film, cut it to the correct size, place it around the candy, and then fold the edges tightly so the product is fully sealed. The folding pattern depends on the candy type, for example twist wrap, double twist, or envelope style.

Specifications:

- * Speed: upto 350 piece per minute (depending upon size of product)
- * Double Reel Inner & Outer
- * Bearing in gears NTN japan
- * Inverter to control speed 2hp INVENT BRAND
- * Gear motor 2hp, 3 phase
- * motor brand new HECO
- * Photocell: Photocell Eye
- * ~~Continuous Paper~~
- * Weight: 1100 kg
- * Dimensions: L 1500mm x W 1500mm x H 2100mm

Approved
24/3/24