


600 lcg/hr Bubble line
centre filled

BOOKLET FOR COMPLETE PRODUCT LINES

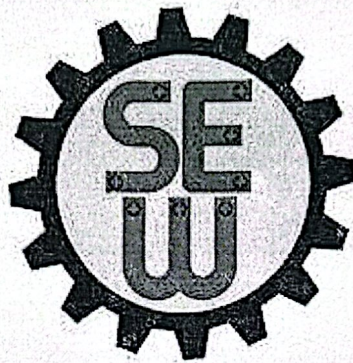

Starmers
Engineering Works

600 Kg/hr

CENTRE-FILLED BUBBLE LINE HIGH SPEED COMPLETE LINE

1. SUGAR GRINDER SEW-701 ✓
2. HEATING CABINET SEW-702 ✗
3. BUBBLE GUM MIXER SEW-803 ✓
4. REST TABLE SEW-804 ✓
5. TROLLY SEW-815 ✓
6. BUBBLE GUM EXTRUDER SEW-805 ✓
7. LIQUID FILLING PUMP SEW-110 ✓
8. ROPE SIZER 5 STAGES SEW-212 ✓
9. REST CONVEYOR SEW-808 ✓
10. UNIPLAST SEW-213 ✓
11. ROTARY DIE WITH CUTTING RINGS SEW-117 ✓
12. DIE STAND SEW-118 ✓
13. COOLING TUNNEL 3 STAGES SEW-812 ✓
14. AC UNIT SEW-813
15. WRAPPING MACHINE SEW-123 ✓

Trait:

1. SUGAR GRINDER SEW-701

Trait:

A sugar grinder converts crystal sugar into fine uniform powder to ensure smooth dough formation, efficient blending with gum base and consistent product texture in bubble gum production. ✓

Specification:

- Storage Capacity: 500 kg ✓
- Grinder 45 Number ✓
- Motor Power 15 hp ✓
- Inner Box SS 303 ✓
- Outer Box M.S ✓
- Dimensions 4 w x 6 l ✓

Dimension: 4 w x 6 l ✓

Weight:

Power Load:

15 hp ✓

Trait:

2. HEATING CABINET SEW-702

Trait:

A heating cabinet maintains controlled temperature to pre-soften and condition the gum mass, ensuring smooth shaping, uniform elasticity, and stable processing in the bubble gum line.

Specification:

- 5 trays ✓
- Outer sheets in M.S ✓
- Inner sheets SS 304 ✓
- Double jacketed with glass wool ✓
- Heaters and blower total load 10 hp ✓

Dimension: 3'x3'x 6' ✓

Weight:

Power Load: 10hp ✓

Trait:

3. BUBBLE GUM MIXER SEW-803

Trait:

Bubble gum mixer is used for kneading high viscous bubble gum base material. Machine has heavy duty design with suitable Gauge of Metal in Pan, blade, cover and jacket for heavy structure deal with high viscous gum base

Specifications:

- For all types of bubble gum
- Capacity 200 Kg in 20 min
- Motor power 50 hp
- Step Gear 3 step
- Tank Material stainless steel 304
- 2 Arms SS.304
- Tilting system with hydraulic Jack
- Hydraulic capacity 3 Hp
- Control panel with all new features
- Heaters 6000 Watt

Dimension: L9'XW6'

Weight:

Power Load: 61hp

4.REST TABLE SEW-804

Trait:

- For a temporary rest of the gum box batch coming from the mixer, ✓

Specifications:

- Base Plate thickness 10mm in S.S 304 ✓
- Legs 4 Nos in S.S 201 ✓

Dimension: 3ft*6ft ✓

Weight:

Power load: 0hp

Trait:

5. Trolly SEW-815

Trait:

It is used to safely transfer the hot, viscous gum base mass from the mixer to the extruder, ensuring continuous material flow and preventing contamination or handling delays in the bubble production line. ✓✓

Specifications:

For moving the gum base mass from mixer to extruder ✓

3ft length ✓

3ft width ✓

Pan in S.S 304 ✓

Trolly stand M.S ✓

Dimension:

Weight:

Power Load: 0hp

6.BUBBLE GUM EXTRUDER SEW-805

Traits:

The bubble gum extruder shapes the mixed gum mass into a continuous rope or sheet with uniform thickness, texture, and density—making it suitable for further forming (cutting, rolling, or shaping).

It essentially transforms the soft, irregular gum from the mixer into a consistent product form for downstream processing.

Specifications:

- For all type of Bubble Gum • Screw Diameter 100mm x 660.4mm ✓
- Capacity 600 kg/hour. ✓
- Type of head Double Jacketed / twinscream ✓
- Motor power 7.5 kw Siemens Germany 15hp ✓
- Inverter 10kw New China 20hp ✓
- step Gear Three step Made by Germany • Helping System with mechanical Rollers ✓
- Heating power 3000 watt. ✓
- Contral panel with all new features. ✓
- Totally safety covers. ✓

Dimension:

Weight:

Power load: 14hp

28hp

7. LIQUID FILLING PUMP SEW-110

Trait:

The center filling pump is a precision dosing system designed to inject liquid filling (such as fruit syrup, chocolate, cream, or jam) into the core of the candy rope during the forming process. It ensures consistent filling quantity and uniform distribution across all candies.

Specifications:

- Filling chocolate and liquid ✓
- keef in S.S 304 ✓
- keef double-jacketed ✓
- ~~Rod in S.S with Teflon covering food-grade heat proof material~~ Not for bubble ✓
- Pipe flexible food grade ✓
- Electric panel with new feature ✓
- Gear motor 2 hp main drive ✓
- Stand in M.S ✓
- Electric heater to moderate temperature 1000 watt 1 NOS ✓
- Electric inverter 2HP to increase or decrease filling in product ✓
- Overflow system to recycle liquid/Chocolate ✓

Dimension:

Weight:

Power Load: 3.3hp ✓

8. ROPE SIZER 5 STAGES SEW-212

Traits:

The rope sizer is a precision machine used to accurately reduce & calibrate the diameter of the candy and toffee rope produced by the batch roller. It ensures a uniform rope thickness suitable for feeding into the forming or cutting machine, maintaining consistent candy size and weight throughout production.

Specifications:

- * Horizontal model
- * 5 stages (4 stages horizontal & 1 vertical)
- * 1st pair in S.S 304 37mm
- * 2nd pair in S.S 304 32mm
- * 3rd pair in S.S 304 27mm
- * 4th pair in S.S 304 22mm
- * 5th pair in S.S 304 17mm
- * Electric panel in S.S 201
- * Sizer plates in S.S 304
- * Side Sheets S.S 201
- * Rope guide in brass
- * Electric inverter new brand INVENT company 3HP
- * Gear motors are of SEW brand Germany 3hp
- * Heat controllers 2 NOS
- * Emergency break to stop equipment
- * Emergency switch to off equipment
- * Electric breakers
- * Electric components brand new
- * Electric heaters 500 x 4 = 2KW

Dimension: 4'6" x 3' x 5'6"

Weight:

Power Load: 5.6hp

9. REST CONVEYOR SEW-808

Trait:

The rest conveyor provides a controlled resting time for the center-filled bubble so the filled material settles evenly, internal pressure stabilizes and the seal strength develops properly. This helps to prevent leakage, deformation or bursting of the bubble.

Specifications

- Dimension: ⁴8 ft width x 20 ft length ✓
- Single Belt ✓
- Belt food-grade material ✓
- Gear motor main driver 2hp ✓
- Double jacketed duct on top of conveyor ✓
- Insulated with thermopore ✓
- Variable inverter for speed control ✓
- Frame in M.S ✓

Dimension: ⁴8 ft width x 20 ft length ✓

Weight:

Power Load: 2hp

10. UNIPLAST SEW-213

Traits:

SEW 160-C is a universal seamless sweet forming machine suitable for forming Eclairs, Hard Boiled

candy, Caramel, and gum products. The SEW 160-C promises reliable and problem-free 24/7 operation.

This machine requires minimal maintenance. The machine can manufacture sweets in various types like, • Solid

- Centre-filled
- Liquid Filled
- Powder-Filled A number of features are incorporated to facilitate the operator to run the machine smoothly.
- 24/7 production with up to ~~1000~~ 600 kgs/hour
- Strong spring loaded punches with diamond polishing ensures long life of die and great finishing for products.
- Quick and easy changeover of die in approx. 3 minutes.
- Low scrap generation
- Universal size Sweet Forming Die

Technical specifications	
Capacity	Up to 1000 ^{600 kg} kg/hr
Speed	4000 to 6000 pieces/minute depending upon the size of the product also vary from product to product from high to low (candy, toffee, bubble) respectively upto 3500
Net weight	1500 kg ✓
Inverter main drive die	3 Hp ✓
Inverter main drive spreader	1Hp ✓
Inverter main drive spreader box	1Hp ✓
Belt	Teflon coted food grade ✓
Grease pump	Lubrication ✓
Side Sheets	In S.S 201 ✓
Pressure Cams	In D2 Grade ✓
Reserve cams	In S.G.R iron grade ✓
Sizer sets	In High carbon steel ✓
Gears	In high carbon steel ✓
Electrical panel	With all new features
Blower	2 Hp for cooling of die
Power load main drive	3 Hp ✓
Power load sizer box drive	1 Hp ✓
Power load spreader drive	0.5 Hp ✓
Power load spreader movement	0.5 Hp ✓
Power load of arms movement for die changing	0.5 Hp ✓
INVERTER SPREADER MOVEMENT	1Hp ✓

Dimension: 6ftx4.5ftx8.5ft

Weight:

Power Load: 7.5hp

11. ROTARY DIE WITH CUTTING RINGS SEW-117

Trait:

The heart of any candy production line is the rotary dies in the forming machine. They literally shape the product and add to its face value. The forming dies are used for the production of hard-boiled candies, Toffees, Eclairs, Powder-filled candies, liquid-filled candies, and more. Starmer Forming dies are recognized in the confectionery industry for their precision-based performance, safety, and functional efficiency.

Starmer machines are built for generational use, we offer a supply of spare parts and die-heads for models that may have been discontinued for decades. As the leading confectionery machinery manufacturer, Starmer aims to be your reliable long-term business partner, and offers the following benefits:

Accuracy:

- Perfectly formed, seamless candies
- Nearly any shape of candy can be made
- To ensure accuracy, we provide drawings, and product samples on request to

help you visualize the sense of the product

Quality:

- The finest quality raw material used

Durability:

- Our 55+ years of experience have garnered the forming dies into a piece of perfection, even with continuous production, the die-set does not damage easily

Material specification:

- Cutting Ring: Cutting Ring in grade Forged M.S. This grade provides cutter pitch (teeth) of 2-3 mm.

- Punch: Punch in grade EN 19, Hardness upto 55 Hrc
- Block: High Quality
- M.S. Guide Pins: Guide pins in grade Carbon Steel.
- Die Parts: Casting in grade Cast Iron.
- Outer Ring: Outer Ring in Brass Casting. For the improvement of rope cutting.

Dimension: 1.5ftx2ft

Weight:

Power Load: 0

12. DIE STAND SEW-118

Trait:

It's main purpose is to make die changing and fitting easier and more efficient.

Specification:

- Main Frame in M.S
- Wheels for movement
- Die Caplone in casting Material
- Screw for die up/down

Dimension:

Weight:

Power Load: Ohp

18. COOLING TUNNEL 3 STAGES SEW-216

Compact, high capacity cooling conveyor and tunnel, well suited for all types of hard candies and feed products, requiring sufficient cooling prior to packaging. Starmer cooling conveyors are designed for precision cooling of all types of hard and soft candy having solid or soft centres, wrapped or unwrapped. Our cooling conveyors come with an option of capability of up to 1000 kg/hr Starmer cooling conveyors are available in various sizes and parameters and can also be customized as per the customer's requirement. With fine product side guards and stainless steel transfer chutes, Individual tier cooling ducts for cooling the product from all sides. Benefits:

- ① Hygienic design ✓
- ② Low maintenance due to individually controlled motors for each tier. ✓
- ③ With variable speed A.C. drives to control speed of the belts. ✓
- ④ Perforated food grade Polypropylene belting allows for ventilation all around the product. ✓

- ⑤ Insulated walls for rapid cooling. ✓
- ⑥ Controlled Air conditioned ventilation. ✓

Specifications:-
~~Model~~

- ~~Model~~ ✓
- Style: Three tier Horizontal Cooling Conveyor. ✓
- ① Size: 16ft long, 5ft width Size 20ft Length, 4ft width
- ② Stage: 3 stages ✓
- ③ 1st step: Mesh 1st step mesh in plastic teflon coated ✓ PP in food grade material
- ④ 2nd step: mesh in plastic teflon coated ✓
- ⑤ 3rd step: ** mesh in plastic & teflon coated. ✓
- ⑥ A.C: 20-Ton capacity ✓
- ⑦ Outer & inner side sheets in S.S 201 ✓
- ⑧ Electric panel: with all new features ✓ 6hp
- ⑨ Inverter: new brand variable speed inverter, ~~Electric Inverter for controlling speed (2 hp each 3 nos)~~ ✓ 6hp
- ⑩ All covers in S.S 201 ✓
- Double jacketed insulates with thermopore.
- Gear: Motor 3 KW (1 KW each 3 nos SEW brand, ~~Water cool~~)
- ~~air cool depend upon requirement of customer, Total power load of this machine = 24 hp~~

Dimension: L W H
20ft x 4ft x 6ft

Weight:

Power Load: 6hp
~~3hp~~

9/10/25
Approved by *[Signature]*
Haji

14. AC UNIT SEW-813

Specifications:

Indoor Unit capacity 20 Ton (25 HP) roof type for cooling conveyor Accessories indoor:

- 1: evaporator brand new copper tube size 3/8 gage 22 distributor size 7/8 section header 1"3/8.
- 2: aluminum fins thickness. 0.150mm company Breez.
- 3: high velocity Air blower With 3 HP motor 3 phase 440/v Hz 50.
- 4: expansion valve company Emerson model TCLE 25 HP.
- 5: Base frame angle iron sizes are on costumer demand.
- 6: Indoor frame cover sheet GI colored 22 gage.
- 7: indoor frame cover sheet insolation with insolated material.
- 8: Indoor copper pipe fitting 18 gage length tube.

25 HP OUTDOOR Company Bitzer with all his ACCESSORIES:

- 1: condensing unit Company Bitzer with high density condensing coil.
- 2: High static air flow fan 3phase 440/v Hz50.
- 3: compressor semi sealed company Bitzer 3 phase 440/v Hz50.
- 4: Liquid receiver capacity 10 liter.
- 5: Oil spreader in/out pipe size 1"1/8
- 6: Flexible pipe company Hong son 1'1/8 and 1' 3/8.
- 7: Hand valve 771
- 8: Filter 78
- 9: Copper length 8, T ya and T 3/8
- 10: section accumulator T 3/8.
- 11: Copper long bend 7/8 and 1"1/8 and 1" 3/8 elbow.

12: dual high low pressure safety switch company Danfoss with high pressure leads.

13: Outdoor base frame channel and angle iron.

15: refrigerant R-22 company (Honeywell USA).

ELECTRIC PANEL equipment's:

1: 22 KVA inverter company (INVT).

2: magnetic contactor 110A amperes for compressor

3: Holding contactor.

4: blower contactor.

5: digital thermostat

6: fan contactor. 7:

connection strip

8: push button.

9: Electric panel box size 24" x 36".

Ducting:

indoor conveyor complete ducting with GI sheet with insulation glass wool material.

15. WRAPPING MACHINE SEW-123

Trait:

is high performance pillow pack wrapping machine for filled or un-filled candies, bubblegums and other similar items incorporating latest and precision components the machine is capable of achieving speed upto 800 pieces per minute. Fin seal and end seal are of high quality ensuring long shelf life of the product. Large size feed disc and brushes enable positive transfer of candies to the carrier chain

SPECIFICATIONS:

OUTPUT:

Upto 800 Pcs/min on candy i Upto 600 Pcs/min on bubble

ELECTRIC MOTORS:

* (1) 2H.P./3-Phase

* (2) ½ H.P.

ELECTRIC HEATERS: 3.2

STANDARD EQUIPMENT: Photo Electric Eye & Invertet

DIMENSIONS (L x WxH): 2,335 x 900 x 1,715 mm ~

WEIGHT: 750 Kg

REEL (Maximum Outer Dia / Core Dia): 280 / 70mm

Power Load:

Same as dynamic