


Fudge Line.

BOOKLET FOR COMPLETE PRODUCT LINES

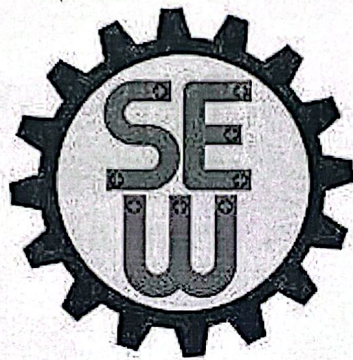

Starmers
Engineering Works

FUDGE COMPLETE LINE

1.GLUCOSE TANK SEW-101 ✓

2.STEAM GENERATOR SEW-102 ✓

3.STEAM HEADLER ✓

4.TOFFE COOKER SEW-603 ✓

5.COOLING TABLE SEW-108 ✓

6.PULLING MACHINE SEW-605 ✓

~~7.LIQUID FILLING PUMP CHOCOLATE SEW-110~~ ✗

8.BATCH ROLLER 75KG SEW-114 ✓

9.ROPE SIZER 5 STAGES SEW-115 ✓

10.CUT AND FOLD WRAP MACHINE SEW- ✓

11.CUT AND TWIST WRAP MACHINE SEW- ✓

1. Glucose Tank SEW-101

Trait:

Glucose storage tanks are engineered with specific traits to ensure hygienic, stable and crystal free storage of liquid glucose and Syrups for industrial applications. ✓

Specifications:

- * Grade: S.S 304 ✓
- * Sheet thickness: 5 mm upper and lower sheet ✓
- * Outer dia sheet thickness: 3 mm ✓
- * Design Type: Vertical ✓
- * Heating System: Coil on the base of tank for Steam Circulation ✓
- * Ladder: Outside the tank ✓
- * Capacity: 20 ton Glucose ✓

- * Dimension: 16ft height x 7ft diameter ✓
- * Power load: 0 ✓

Handwritten:
~~Not~~
Approved

2. Steam Generator SEW-102

Trait:

Steam generator heats water to produce high Pressure steam for heating, cleaning or industrial processes.

Detail of Mechanical Parts:

1. Gauge Glass: 01
2. Stop Valve diameter 1": 01
3. Safety Valve diameter 1": 01
4. NRV diameter 1": 01
5. Blow down diameter 1": 01
6. Air Vent diameter globe Valve = 1/2": 01
7. Feed Water Pump 01 Multistage (Grundfos): 01
8. Electric panel Box with complete auto controlled system: 01
9. Stack diameter 8" height 15ft. thick 2.5 mm: 01

Detail of Electric Parts:

1. Burner with gas assembly and diesel pump
2. Panel Box 16" x 30" x 8" thick 18g
3. Overload company Schneider: 02
4. Pressure switch 10 kg imported: 02
5. Electric Contactor: 02
6. Power relay company (Finder): 04 7. Push button company (Telemechanic): 03

Specifications:

- * Type of passes: 3 pass
- * Test pressure: 225 psi
- * Working pressure: 150 psi
- * Tube Dia: 2" or 2 1/2"
- * Pressure Shell thickness: 1/2"
- * Tube sheet thick: 1/2"

High Approval

- * Rock wool thickness: 2" ✓
- * Isolation sheet thickness: 24 GAUGE ✓
- * Burner Motor: 2hp ✓
- * Feed water motor: 3hp ✓

General Details:

- * Capacity: 600 kg/hr ✓
- * Electric Load: 5 hp ✓
- * Dimension: 8' x 3'5" x 3'5" ✓

Approved

3. Steam Header SEW-103

Trait:

Steam headers are design to collect steam from a boiler or steam generator and distribute high quality, dry steam to various user points while performing several critical functions. ✓

Specifications:

- * Material of header: M.S ✓
- * Diameter: 1 ft ✓
- * Branch pipes: 1", 2", 3", 4" depend on system needs ✓
- * Design: Cushioned Cylinder ✓
- * Connection: 5 ✓

Dimension: Dia 1ft x Length 3ft ✓

Power load: 0 ✓

M.H.
Approved

4: Toffee Cooker (150 Kg)

Trait:

The purpose of a toffee cooker is to heat and cook sugar based mixtures to a controlled temperature so the toffee reaches the correct thickness, texture, and moisture level. It provides uniform heating and precise temperature control to prevent burning, ensure consistent quality, and achieve the required hardness or chewiness of the final toffee product.

Specifications:

Toffee cooker

- * Capacity: 150kg per batch after 20 to 25 mins ✓
- * Stirrer: S.S 304 ✓
- * Pan material: S.S 304 ✓
- * Pan double jacketed with S.S 304 / M.S optional ✓
- * Frame in: M.S / S.S 201 optional ✓
- * Electric pannel with all new features ✓
- * 3 hp gear motor drive ✓
- * Safety valve ✓
- * Cover of pan in S.S 304 ✓

Approved

Dimensions (H x W x L):

Power Load: 3hp

5. Cooling Table SEW-108

Trait:

The cooling table is a crucial post-cooking unit used for rapid cooling and conditioning of the cooked sugar mass before further processing such as mixing, flavoring, coloring, or forming. It ensures uniform texture and workability of the batch. ✓

Specifications

- * Base plate thickness: 10mm in S.S 304 ✓
- * Material of plate: Boundary wall S.S 304 ✓
- * Cooling medium water: Cooling system A frame work for moving water Inlet and outlet Valve. * ✓

Legs: 4 Nos in S.S 201 grade ✓

Dimension: 3ft x 6ft x 2'6" (W x L x H) ✓

Power Load: 0 ✓

Approved

6: Pulling Machine

Trait:

The purpose of a pulling machine is to stretch and fold cooked candy or toffee in a controlled way to improve its texture and structure. By continuously pulling the mass, the machine incorporates air, evens out temperature, and develops the desired smoothness, shine, and chew of the final product.

Specifications:

- * Capacity: 100kg ✓
- * Main drive motor: 10hp ✓
- * Arms: Hard chromed ✓
- * Arms for continuous pulling: 3 arms ✓
- * Side sheets: In S.S 201 ✓
- * Electric panel for control ✓

Approved

Dimensions (H x W x L): ✓

Power Load: 10hp ✓

8: Batch Roller (75kg)

Trait:

The batch roller is a key intermediate machine in the candy, lollipop, toffee, and fudge production line. It is designed to continuously roll, shape, and form the cooked mass into a uniform cylindrical rope. It ensures consistent rope size and proper distribution of center filling, flavor, and color before feeding into the rope sizer or forming machine.

Specifications:

- * Frame work horizontal ✓
- * Rollers Quantity 4 ✓
- * Rollers material in S.S 304 food grade ✓
- * Upper body in S.S 304 food grade ✓
- * Bearing in gears ✓
- * Gear motor main drive 1hp ✓
- * Up and down drive 1hp ✓
- * Electric heaters to maintain temperature 1000 watt (2 NOS) ✓
- * Capacity 75 kg ✓
- * Length 6.5 ft ✓
- * Gear motor SEW brand Germany ✓
- * Roller caplene in casting material ✓
- * Additional tray for removal of wastage ✓

Dimensions (H x W x L): 4'6" x 2'2" x 7' ✓

Power Load: 4.68 hp ✓

Approved

9: ROPE SIZER SEW-212 ✓

Traits:

The rope sizer is a precision machine used to accurately reduce & calibrate the diameter of the candy and toffee rope produced by the batch roller. It ensures a uniform rope thickness suitable for feeding into the forming or cutting machine, maintaining consistent candy size and weight throughout production. ✓ ✓

Specifications:

- * Horizontal model ✓
- * 5 stages (4 stages horizontal & 1 vertical) ✓
- * 1st pair in S.S 304 37mm ✓
- * 2nd pair in S.S 304 32mm ✓
- * 3rd pair in S.S 304 27mm ✓
- * 4th pair in S.S 304 22mm ✓
- * 5th pair in S.S 304 17mm ✓
- * Electric panel in S.S 201 ✓
- * Sizer plates in S.S 304 ✓
- * Side Sheets S.S 201 ✓
- * Rope guide in brass ✓
- * Electric inverter new brand INVENT company 3HP ✓
- * Gear motors are of SEW brand Germany 3hp ✓
- * Heat controllers 2 NOS ✓
- * Emergency break to stop equipment ✓
- * Emergency switch to off equipment ✓
- * Electric breakers ✓
- * Electric components brand new ✓
- * Electric heaters 500 x 4 = 2KW ✓

Approved

Dimension: (H x W x L) 4'6" x 3' x 5'6" ✓

Power Load: 5.68hp ✓

10. CUT AND FOLD WRAPPING

Trait:

It's main purpose is to take a continuous wrapping film, cut it to the correct size, place it around the candy, and then fold the edges tightly so the product is fully sealed. The folding pattern depends on the candy type, for example twist wrap, double twist, or envelope style.

Specifications:

- Speed: upto ³⁵⁰ 400 piece per minute ✓ *depending upon size of product*
- Double Reel Inner & Outer ✓
- Bearing in gears NTN japan ✓
- Inverter to control speed *2hp INVERT BRAND* ✓
- Gear motor 2hp, 3 phase ✓
- motor brand new HECO ✓
- Photocell: Photocell Eye ✓
- Continuous Paper ✓

Approved

- Weight: 1100 kg ✓
- Dimensions: L 1500mm x W 1500mm x H 2100mm ✓

11. CUT AND TWIST WRAPPING

Trait:

A cut and double twist wrapping machine is used to wrap individual candies quickly and neatly. It's purpose is to take a piece of wrapper, place the candy inside, cut the wrapper to the right size, and then twist both ends.

Specifications:

- Speed: 350 piece per minute ✓
- Double Reel Inner & Outer ✓
- Bearing in gears NTN japan ✓
- Inverter to control speed ✓
- Gear motor 2hp, 3 phase ✓
- motor brand new HECO ✓
- Photocell: Photocell Eye ✓
- Continues Paper ✓

✓ depending upon size of product ✓

✓ 2 HP INVENT BRAND

~~Not~~
Approved

Weight: 1100 kg

Dimensions: L 1500mm x W 1500mm x H 2100mm