


Toffee 800 kg/hr .

BOOKLET FOR COMPLETE PRODUCT LINES

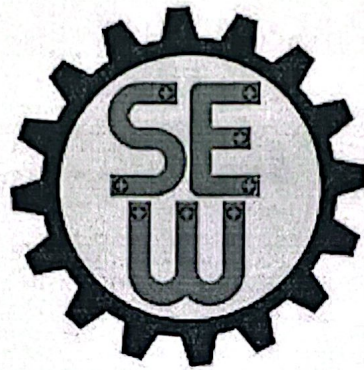

Starmers
Engineering Works

eyu

~~Edible~~ Toffee (800 KG/HOUR)

- 1: Glucose Tank ✓
- 2: Steam Generator ✓
- 3: Steam Headler ✓
- 4: Toffee Cooker ✓
- 5: Cooling Table ✓
- 6: Pulling Machine ✓
- 7: Liquid Filling Pump ✓
- 8: Batch Roller (125kg) ✓
- 9: Rope Sizer (5 stages) ✓
- 10: Uniplast (160-C) ✓
- 11: Rotary Die ✓
- 12: Die Stand ✓
- 13: Ac Unit ✓
- 14: Cooling Tunnel 3 Stages ✓
- 15: Wrapping Machine ✓

~~Full~~
Approved

1. Glucose Tank SEW-101

Trait:

Glucose storage tanks are engineered with specific traits to ensure hygienic, stable and crystal free storage of liquid glucose and Syrups for industrial applications.

Specifications:

- * Grade: S.S 304
- * Sheet thickness: 5 mm upper and lower sheet
- * Outer dia sheet thickness: 3 mm
- * Design Type: Vertical
- * Heating System: Coil on the base of tank for Steam Circulation
- * Ladder: Outside the tank
- * Capacity: 20 ton Glucose

- * **Dimension:** 16ft height x 7ft diameter
- * **Power load:** 0


Approved

2.STEAM GENERATOR SEW-202

Trait:

The steam generator heats water to produce high pressure steam for heating, cleaning or industrial processes.

Detail of Mechanical Parts

- * Gauge Glass: 01
- * Stop Valve diameter: 2" — 01
- * Safety Valve diameter: 1.5" — 01
- * NRV diameter: 1" — 01
- * Blow down diameter: 1.5" — 01
- * Air Vent diameter: 1" globe Valve — 01
- * Feed Water Pump 01 Multistage (Grundfos) — 01
- * Electric panel Box with complete auto controlled system — 01
- * Stack diameter: 15" height 20 ft. thick 2.5 mm — 01

Detail of Electric Parts

- * Burner with gas assembly and diesel pump
- * Panel Box: 16" x 30" x 8" thick 18 gauge
- * Overload company Schneider
- * Pressure switch 10 kg imported — 02
- * Electric Contactor: 02
- * Power relay company (Finder): 04
- * Push button company (Telemechanic): 03

Approved

Specifications:

- * Type of passes: 3 pass
- * Test pressure: 225 psi
- * Working pressure: 150 psi

* Tube Dia: 2" or 2.5" ✓

* Pressure Shell thickness: 1/2" ✓

* Tube sheet thickness: 1/2" ✓

* Rock wool thickness: 2" ✓

* Isolation sheet thickness: 24 GAUGE ✓

* Burner motor: 4 hp ✓

* Feedwater motor: 3 hp ✓

Capacity: 2000kg ✓

Power Load: 7 hp ✓


Approved

3. Steam Header SEW-103

Trait:

Steam headers are design to collect steam from a boiler or steam generator and distribute highquality, dry steam to various user points while performing several critical functions.

Specifications:

- * Material of header: M.S.
- * Diameter: 1 ft
- * Branch pipes: 1", 2", 3", 4" depend on system needs
- * Design: Cushioned Cylinder
- * Connection: 5

Dimension: Dia 1ft x Length 3ft

Power load: 0

Myth
Approved
14/2/26

4: Toffee Cooker

Trait:

The purpose of a toffee cooker is to heat and cook sugar based mixtures to a controlled temperature so the toffee reaches the correct thickness, texture, and moisture level. It provides uniform heating and precise temperature control to prevent burning, ensure consistent quality, and achieve the required hardness or chewiness of the final toffee product.

Specifications:

Toffee cooker

- * Capacity: 150kg per batch after 20 to 25 mins
- * Stirrer: S.S 304
- * Pan material: S.S 304
- * Pan double jacketed with S.S 304 / M.S optional
- * Frame in: M.S / S.S 201 optional
- * Electric pannel with all new features
- * 3 hp gear motor drive
- * Safety valve
- * Cover of pan in S.S 304

Quantity: 2 Cookers

Note: In high speed we need to install 2 (150kg toffee cookers)

Powerload: 6hp

Approved

5: Cooling Table SEW-108

Trait:

The cooling table is a crucial post-cooking unit used for rapid cooling and conditioning of the cooked sugar mass before further processing such as mixing, flavoring, coloring, or forming. It ensures uniform texture and workability of the batch.

Specifications

* Base plate thickness: 10mm in S.S 304

* Material of plate: Boundary wall S.S 304

* Cooling medium water: Cooling system A frame work for moving water Inlet and outlet Valve. * Legs: 4

Nos in S.S 201 grade

Dimension: 3ft x 6ft x 2'6" (W x L x H)

Power Load: 0

M.H.
Approved

6: Pulling Machine

Trait:

The purpose of a pulling machine is to stretch and fold cooked candy or toffee in a controlled way to improve its texture and structure. By continuously pulling the mass, the machine incorporates air, evens out temperature, and develops the desired smoothness, shine, and chew of the final product.

Specifications:

- * Capacity: 100kg ✓
- * Main drive motor: 10hp ✓
- * Arms: Hard chromed ✓
- * Arms for continuous pulling: 3 arms ✓
- * Side sheets: In S.S 201 ✓
- * Electric pannel for control ✓

Approved

Dimension HxWxL :

Power Load : 10hp

7: Liquid Filling Pump

Trait:

The center filling pump is a precision dosing system designed to inject liquid filling (such as fruit syrup, chocolate, cream, or jam) into the core of the candy rope during the forming process. It ensures consistent filling quantity and uniform distribution across all candies.

Specifications:

- * Filling chocolate and liquid ✓
- * keef in S.S 304 ✓
- * keef double-jacketed ✓
- * Rod in S.S with Teflon covering food-grade heat proof material ✓
- * Pipe flexible food grade ✓
- * Electric panel with new feature ✓
- * Gear motor 2 hp main drive ✓
- * Stand in M.S ✓
- * Electric heater to moderate temperature 1000 watt 1 NOS ✓
- * Electric inverter 2HP to increase or decrease filling in product ✓
- * Overflow system to recycle liquid/Chocolate ✓

Approved

Dimension: (H \ W \ L) ✓

Power Load: 3.34 hp ✓

8. BATCH ROLLER SEW-214

Trait:

The batch roller is a key intermediate machine in the candy, lollipop, toffee, fudge production line designed to continuously roll, shape, and form the cooked mass into a uniform cylindrical rope. It ensures consistent rope size and proper distribution of center filling, flavour, and color before feeding into the rope sizer or forming machine.

Specifications:

- * Frame work horizontal ✓
- * Rollers Quantity 4 ✓
- * Rollers material in S.S 304 food grade ✓
- * Upper body in S.S 304 food grade ✓
- * Gear motor main drive 2hp ✓
- * Up and down drive 2hp ✓
- * Electric heaters to maintain temperature 1000 watt (2 NOS) ✓
- * Capacity 125 kg ✓
- * Gear motor SEW brand Germany ✓
- * Roller caplene in casting material ✓
- * Additional tray for removal of wastage ✓

17/12/11
Approved

Dimension (H \ W \ L): 5'6" x 3' x 8'6" ✓

Weight: ✓

Power Load: 5.3 hp ✓

9: ROPE SIZER SEW-212 ✓

Traits:

The rope sizer is a precision machine used to accurately reduce & calibrate the diameter of the candy ✓
and toffee rope produced by the batch roller. It ensures a uniform rope thickness suitable for feeding into ✓
the forming or cutting machine, maintaining consistent candy size and weight throughout production. ✓

Specifications:

- * Horizontal model ✓
- * 5 stages (4 stages horizontal & 1 vertical) ✓
- * 1st pair in S.S 304 37mm ✓
- * 2nd pair in S.S 304 32mm ✓
- * 3rd pair in S.S 304 27mm ✓
- * 4th pair in S.S 304 22mm ✓
- * 5th pair in S.S 304 17mm ✓
- * Electric panel in S.S 201 ✓
- * Sizer plates in S.S 304 ✓
- * Side Sheets S.S 201 ✓
- * Rope guide in brass ✓
- * Electric inverter new brand INVENT company 3HP ✓
- * Gear motors are of SEW brand Germany 3hp ✓
- * Heat controllers 2 NOS ✓
- * Emergency break to stop equipment ✓
- * Emergency switch to off equipment ✓
- * Electric breakers ✓
- * Electric components brand new ✓
- * Electric heaters 500 x 4 = 2KW ✓

Dimension: (H x W x L) 4'6" x 3' x 5'6" ✓

Power Load: 5.68hp ✓

1/3/21
Approved

10: UNIPLAST FORMING MACHINE SEW-160 C

Traits

SEW 160-C is a universal seamless sweet forming machine suitable for forming Eclairs, Hard Boiled candy, Caramel, and gum products. The SEW 160-C promises reliable and problem-free 24/7 operation. ✓

This machine requires minimal maintenance. The machine can manufacture sweets in various types like: ✓

1. Solid ✓
2. Centre-filled ✓
3. Liquid Filled ✓
 - Powder-Filled A number of features are incorporated to facilitate the operator to run the machine smoothly. ✓
 - 24/7 production with up to ~~1000kg/hour~~ 800 Kg/hr ✓
 - Strong spring loaded punches with diamond polishing ensures long life of die and great finishing for products. ✓
 - Quick and easy changeover of die in approx. 3 minutes. ✓
 - Low scrap generation. ✓
 - Universal size Sweet Forming Die. ✓

Technical Specifications:

- Capacity: Up to ~~1000kg/hour~~ 800 Kg/hr ✓
- Speed: ~~4000 to 6000 pieces/minute~~ depending upon the size of the product (candy, toffee, bubble respectively) ~~3000 to~~ upto 4000 pieces/min ✓
- Net Weight: 1500 kg ✓
- Inverter main drive die: 3 Hp ✓
- Inverter main drive spreader: 1 Hp ✓
- Inverter main drive spreader box: 1 Hp ✓
- Belt: Teflon coated food grade ✓
- Grease pump: Lubrication ✓
- Side Sheets: In S.S 201 ✓
- Pressure Cams: In D2 Grade ✓
- Reserve cams: In S.G.R iron grade ✓
- Sizer sets: In High carbon steel ✓
- Gears: In high carbon steel ✓
- Electrical panel: With all new features ✓
- Blower: 2 Hp for cooling of die ✓
- Power load main drive: 3 Hp ✓
- Power load sizer box drive: 1 Hp ✓
- Power load spreader drive: 0.5 Hp ✓
- Power load spreader movement: 0.5 Hp ✓

Approved

- Power load of arms movement for die changing: 0.5 Hp ✓

Physical & Power Details

* Dimensions (H x W x L): 6ft x 4.5ft x 8.5ft ✓

* Power Load: 7.5 hp ✓

~~Not~~
Approved

11: ROTARY DIE WITH CUTTING RING

Trait:

The heart of any candy production line are the rotary dies in the forming machine. It literally shapes the product and adds to the face value. The forming dies are used for the production of hard boiled candies, Toffees, Eclairs, Powder-filled candies, Liquid filled candies and more.

Starmer Forming dies are recognized in the confectionery industry for their precision-based performance, along with being safe and having the functional efficiency.

Starmer machines are built for generational use, we offer supply of spare parts and die-heads for models that may have been discontinued for decades. As the leading confectionery machinery manufacturer, Starmer aims to be your reliable long-term business partner and offers the following benefits.

Accuracy:

- * Perfectly formed, seamless candies
- * Nearly any shape of candy can be made
- * To ensure accuracy, we provide drawings, products samples on request to help you visualize the sense of the product.

Quality:

- * Finest quality of raw-material used

Durability:

- * Our 55+ years of experience has garnered the forming dies into a piece of perfection, even with continuous production, the die-set does not damage easily.

Specification:

Cutting ring in Grade EN 19 High Wear Resistance. This grade provides cutter Pitch (Teeth) of up to 2 mm

- * Punch: Punch in Grade EN 19, Hardness up to 55 HRC High Wear Resistant Block: High Quality M.S Tempered & Good Wear Resistant.

Approved

12: Die Stand

Trait:

It's main purpose is to make die changing and fitting easier and more efficient. ✓

Specification:

* Main Frame in M.S. ✓

* Wheels for movement ✓

* Die Caplene in casting Material ✓

* Screw for die up/down ✓

Dimension:

[H x L]: [5.5ft x 5ft] ✓

Power Load: [0] ✓

13: COOLING AC UNIT SEW-220

Specification of AC unit:

- Indoor Unit Capacity 20 Ton (25 HP) roof type for cooling conveyor Accessories indoor ✓
- Evaporator: Brand new copper tube size 3/8 gage 22 ✓
- Distance: Size 78 section header 3/8 ✓
- Aluminum Fins: Thickness 0.150mm company Breez ✓
- High velocity Air blower With 3 HP motor 3 phase 440/v Hz 50 ✓
- Expansion Valve: Company Emerson model TCLE 25 HP ✓
- Base Frame: Angle iron sizes are on customer demand ✓
- Indoor Frame Cover Sheet: GI colored 22 gage ✓
- Insulation: Indoor frame cover sheet insulation with insulated material ✓
- Indoor Copper Pipe Fitting 18 gage length tube ✓

• **25 HP OUTDOOR Company Bitzer with all his ACCESSORIES**

1. Condensing Unit Company Bitzer with high density condensing coil ✓
2. High static air flow fan 3phase 440/v Hz 50 ✓
3. Compressor Semi sealed company Bitzer 3 phase 440N H250 ✓
4. Liquid Receiver: Capacity 10 liter ✓
5. Oil Spreader: In/out pipe size 1 1/8 ✓
6. Flexible Pipe Company Hong son 1 1/8 and 1 3/8 ✓
7. Hand Valve 771 ✓
8. Filter 78 ✓
9. Copper Length: 8, T ya and T 3/8 ✓
10. Section Accumulator: T 3/8 ✓
11. Copper Long Beed and 1 1/8 and T 3/8 elbow ✓
12. Dual high low pressure safety switch company Danfoss with high pressure leads ✓
13. Outdoor Base Frame channel and angle ✓
14. Refrigerant R-22 company (Honeywell USA) ✓

ELECTRIC PANEL equipment's:

1. 22 KVA inverter company (INVT 1) ✓
2. Magnetic Contactor 100A amperes for compressor ✓
3. Holding Contactor ✓
4. Blower Contactor ✓
5. Egra thermostat ✓
6. Fan Contactor ✓
7. Connection Strip ✓
8. Push Button ✓
9. Electric Panel Box: Size 24"x 36 ✓

Approved

ducting ✓

* Indoor conveyor complete ducting with GI sheet with insulation glass wool material ✓

Dimension: ✓

Weight:

Power Load: 28 hp ✓

~~18/11~~
Approved

14: COOLING TUNNEL 3 STAGES SEW-219

Compact, high capacity cooling conveyor and tunnel, well suited for all types of hard candies and feed products, requiring sufficient cooling prior to packaging. Starmer cooling conveyors are designed for precision cooling of all types of hard and soft candy having solid or soft centres, wrapped or unwrapped. Our cooling conveyors come with an option of capability of up to 1000 kg/hr. Starmer cooling conveyors are available in various sizes and parameters and can also be customized as per the customer's requirement. With fine product side guards and stainless steel transfer chutes, Individual tier cooling ducts for cooling the product from all sides.

Benefits:

- * Hygienic design.
- * Low maintenance due to individually controlled motors for each tier.
- * With variable speed A.C drives to control speed of the belts.
- * Perforated food grade Polypropylene belting allows for ventilation all around the product.
- * Insulated walls for rapid cooling.
- * Controlled Air conditioned ventilation.
- * Style: Three tier Horizontal Cooling Conveyor.
- * Size: 20ft length, 4ft width.
- * Stage: 3 stages.
 - 1st step: Mesh in PP in food grade material.
 - 2nd step: Mesh PP in food grade material.
 - 3rd step: Mesh PP in food grade material
- * A.C: 20-Ton capacity.
- * Outer & inner side sheets In S.S 201.
- * Electric panel With all new features.
- * Inverter New brand variable speed inverter 6 HP.
- * All covers: In S.S 201.
- * Double jacketed insulates with thermopore.
- * Gear Motor: 3 KW / 1 KW each 3 NOS SEW brand.
- * Dimension (L x W x H): 20ft x 4ft x 6ft
- * Power Load: ~~6 HP~~ 6hp

Int Approved

15: Wrapping Machine

Trait:

This double twist wrapping machine is built to wrap individual candies quickly, evenly, and without waste. Its main purpose is to take loose candies, feed them one by one, and wrap each piece tightly using single or double paper, keeping the product clean and well protected. The machine also aims to keep production steady and reliable by controlling paper feed, speed, and alignment automatically, so every wrapped candy looks the same and no empty or missing wraps are produced.

MACHINE FEATURES:

1. MACHINE WITH CANDY-SETTLING PLATE, FEEDING CANDY AUTOMATICALLY.
2. SINGLE AND DOUBLE LAYERS OF WRAPPING PAPER ARE USED.
3. 100% PACKING RATE. NO EMPTY PACKAGE. NO CANDY NO PAPER SENDING.
4. SERVO MOTOR CONTROL PAPER SENDING SYSTEM.
5. AUTOMATICALLY FOLLOWED BY PHOTO ELECTRICITY OF COMPUTER.
6. THE SPEED IS ADJUSTED BY FREQUENCY-CHANGING DEVICE.
7. HAS TOUCH SCREEN AND EASY OPERATION.

Specifications:

- * CAPACITY: 450PCS/ MIN.
- * PACKING MATERIAL: CELLOPHANE, PVC, POLYPROPYLENE, STENCIL, COMPOSITE MATERIAL, ETC.
- * POWER: 2.5 KW
- * ELECTRICAL SOURCE: 380V 50HZ
- * WEIGHT OF MACHINE: 1083 KG
- * SPECIFICATION OF FOOD:
 - * LENGTH: 11-35MM
 - * WIDTH: 11-26MM
 - * THICKNESS: 5-20MM
 - * DIMENSION: 1900*1100*1480MM

Approved