


Flat Lollipop Line.

BOOKLET FOR COMPLETE PRODUCT LINES

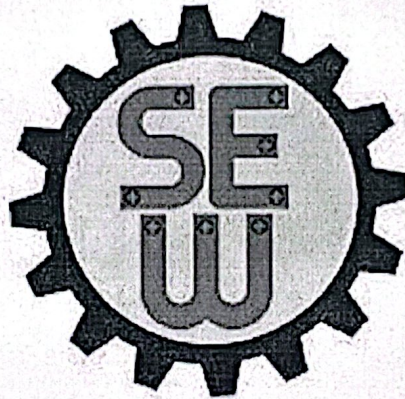

Starmmer
Engineering Works

Flat Lollipop Line

- * Glucose Tank ✓
- * Steam Generator ✓
- * Steam Header ✓
- * Candy Continuous Cooker (450 kg/hr) ✓
- * Vacuum Pump ✓
- * Cooling Table ✓
- * Kneading Machine ✓
- * Batch Roller (75 kg) ✓
- * Rope Sizer (4 stages) ✓
- * Flat Lollipop Forming + Wrapping Machine ✓

Dissolving Tank? ? → Added

Storage Tank? → Added

1. GLUCOSE TANK

Trait:

Glucose storage tanks are engineered with specific traits to ensure hygienic, stable and crystal free storage of liquid glucose and Syrups for industrial applications.

Specifications:

- * Grade: S.S 304
- * Sheet thickness: 5 mm upper and lower sheet
- * Outer dia sheet thickness: 3 mm
- * Design Type: Vertical
- * Heating System: Coil on the base of tank for Steam Circulation
- * Ladder: Outside the tank
- * Capacity: 20 ton Glucose
- * Dimension: 16ft height x 7ft diameter
- * Power load: 0

2. STEAM GENERATOR

Trait:

Steam generator heats water to produce high Pressure steam for heating, cleaning or industrial processes.

Detail of Mechanical Parts:

1. Gauge Glass: 01
2. Stop Valve diameter 1-1/2": 01
3. Safety Valve diameter 1 1/2": 01
4. NRV diameter 1": 01
5. Blow down diameter 1": 01
6. Air Vent diameter 1/2" globe Valve : 01
7. Feed Water Pump 01 Multistage (Grundfos): 01
8. Electric panel Box with complete auto controlled system: 01
9. Stack diameter 15" height 20 ft thick 2.5 mm: 01

Detail of Electric Parts:

1. Burner with gas assembly and diesel pump
2. Panel Box 16" x 30" x 8" thick 18 guage
3. Overload company Schneider: 02
4. Pressure switch 10 kg imported: 02
5. Electric Contactor: 02
6. Power relay company (Finder): 04
7. Push button company (Telemechanic): 03
8. ~~Loading and Unloading Responsibility of Client~~

Specifications:

- * Type of passes: 3 pass
- * Test pressure: 225 psi

* Working pressure: 150 psi ✓

* Tube Dia: 2" or 2 1/2" ✓

* Pressure Shell thickness: ✓

* Tube sheet thick: 1/2" ✓

* Rock wool thickness: 2" ✓

* Insolation sheet thickness: 24 GAUGE ✓

* Burner Motor: 2hp ✓

* Feed water motor: 3hp ✓

General Details:

* Capacity: 1500 kg/hr ✓

* Electric Load: 5 hp ✓

* Dimension: 8' x 3'5" x 3'5" ✓

3.STEAM HEADLER

Trait:

Steam headers are design to collect steam from a boiler or steam generator and distribute high quality, dry steam to various user points while performing several critical functions.

Specifications:

- * Material of header: M.S
- * Diameter: 1 ft
- * Branch pipes: 1", 2", 3", 4" depend on system needs
- * Design: Cushioned Cylinder
- * Connection: 5

* Dimension: Dia 1ft x Length 3ft

* Power load: 0

4.CANDY CONTINOUS COOKER 450KG/HR

Trait:

The candy continuous vacuum cooker automatically produces hard-boiled candies and milk caramels with high clarity and smooth texture. It minimizes sugar loss and maintains consistent quality, even with moisture levels below 1%.

Operating parameters such as output vacuum, temperature, cooking time, and batch weight are adjustable. Once set, the system runs automatically and continuously with low operating cost.

Specifications:

- * Electric Panel ✓
- * 450 kg per hour ✓
- * Pans in S.S 304 ✓
- * Body in S.S 304 ✓
- * Electric panel with all new features ✓
- * Body Double jacketed (S.S 304) ✓
- * Output 450 kg/hr ✓
- * Dozing pump 3 hp (imported used) ✓
- * For sugar pump 2 hp 1450 rpm ✓
- * Pan 2 nos in S.S 304 food grade ✓
- * Batch Auto Control ✓
- * Steam Gauge ✓
- * Safety Valve ✓
- * Seqt Valve ✓

Dimensions:

H \ W \ L

8.5ftx6ftx7ft

Power Load: 4 HP ✓

5.VACUUM PUMP

Trait:

The vacuum pump is used to rapidly remove moisture (Water vapour) from the cooked candy mass under reduced pressure, which allows lower temperature boiling and prevents caramelization or burning of sugars.

Specification:

For vacuum pump 10 hp=1450 pm

Frame = M.S

Dimension= 2ftx4ftx1ft

Weight:

Power Load: 10 hp

DISSOLVING TANK:

Trait:

The dissolving tank is an essential unit in the candy manufacturing process designed for the controlled dissolution of sugar, glucose syrup, and other ingredients in water to form a homogeneous sugar solution or slurry.

Specifications:

- 400kg capacity
- Double jacketed with MS
- Body in ss 304
- Legs in M.S
- Stirrer in S.S 304
- Gear motor main drive 2hp
- Steam Gauge
- Safety valve
- * Scat valve

Dimension: 5'6"x 3'5"x 3'5"

Power Load: 2hp

STORAGE TANK :

Trait:

The storage tank is designed to hold and maintain cooked sugar mass or syrup at a controlled temperature before feeding it into the forming or depositing section of the candy line.

Specifications:

400kg capacity

single jacketed

Body in S.S 304

Legs in MS

Stirrer in S.S 304

Gear motor main drive 1hp

Dimension: 6'x3'6"x3'6"

Power Load: 1 hp

6.COOLING TABLE

Trait:

The cooling table is a crucial post-cooking unit used for rapid cooling and conditioning of the cooked sugar mass before further processing such as mixing, flavoring, coloring, or forming. It ensures uniform texture and workability of the batch.

Specifications

- * Base plate thickness: 10mm in S.S 304
- * Material of plate: Boundary wall S.S 304
- * Cooling medium water: Cooling system A frame work for moving water Inlet and outlet Valve.
- * Legs: 4 Nos in S.S 201 grade

Dimension: 3ft x 6ft x 2'6"

Power Load: 0

7.KNEADING MACHINE

Trait:

The rotary kneading machine (SEW-109) is a specialized piece of confectionery equipment perfectly suited for the uniform mixing and kneading of the cooked sugar mass used in producing hard-boiled candy.

Its primary function is to guarantee the uniform distribution of essential ingredients, including solids, acids, and any other additives, ensuring a consistent and high-quality final product.

To maintain food safety standards, the machine operates in a hygienic way, utilizing stainless steel for all contact parts, which are also efficiently water-cooled to manage the high temperatures of the candy mass during the kneading process.

This machine eliminates the need for tiresome and exhausting manual mixing and saves on the labor costs.

Specifications:

- * Roller in s.s 304
- * Main drive 5 hp
- * Steel plate 4ft
- * Switch on / off
- * Side sheets in S.S 201
- * Main plate in S.S 304

Dimension: 5'x5'6"x5'6"

Power Load: 5 hp

8.BATCH ROLLER 75KG

Trait:

The batch roller is a key intermediate machine in the candy, lollipop, toffee, and fudge production line. It is designed to continuously roll, shape, and form the cooked mass into a uniform cylindrical rope. It ensures consistent rope size and proper distribution of center filling, flavor, and color before feeding into the rope sizer or forming machine.

Specifications:

- * Frame work horizontal
 - * Rollers Quantity 4
 - * Rollers material in S.S 304 food grade
 - * Upper body in S.S 304 food grade
 - * Bearing in gears
 - * Gear motor main drive 1hp
 - * Up and down drive 1hp
 - * Electric heaters to maintain temperature 1000 watt (2 NOS)
 - * Capacity 75 kg
 - * Length 6.5 ft
 - * Gear motor SEW brand Germany
 - * Roller caplene in casting material
 - * Additional tray for removal of wastage
- Dimensions (H x W x L): 4'6" x 2'2" x 7'**
- Power Load: 4.68hp**

9. ROPE SIZER 4 STAGES

Traits:

The rope sizer is a precision machine used to accurately reduce & calibrate the diameter of the candy and toffee rope produced by the batch roller. It ensures a uniform rope thickness suitable for feeding into the forming or cutting machine, maintaining consistent candy size and weight throughout production.

Specifications:

- * Horizontal model
- * 4 stages
- * 1st pair in S.S 304 32mm
- * 2nd pair in S.S 304 27mm
- * 3rd pair in S.S 304 22mm
- * 4th pair in S.S 304 17mm
- * Electric panel in S.S 201
- * Side sheets in S.S 201
- * Sizer plates in S.S 304
- * Rope guide in brass
- * Electric inverter new brand INVENT company =2hp
- * Gear motors are of SEW brand Germany
- * Heat controllers Digital 2 NOS
- * Emergency break to stop equipment
- * Emergency switch to off equipment
- * Electric breakers
- * Bearings are used instead of bushes to reduce maintenance of equipments
- * Main Drive Gear Motor =2HP
- * Heaters 500 Watt (4 NOS) = 2 Kw

Dimension:

HxWxL

4.3ftx 2.5ftx 6ft ✓

Weight: ✓

Power Load: 4•68 hp ✓

10. FLAT LOLLIPOP + WRAPPING MACHINE

Trait:

The flat lollipop forming and wrapping machine is a single unit that makes flat lollipops and wraps them right away. The production line is a complete setup for making different kinds of hard boiled flat shape lollipops using die-formed shapes.

Specifications

- * Function: Flat Shape Lollipop ✓
- * Capacity: 350 to 400 pcs/min ✓
- * Motor power: 7.5kw ✓
- * Inverter: 10kw ✓
- * Modal Material: Special Ms/imported ✓
- * Punches Quantity: 22/round ✓
- * Sizer Set: One step ~~not~~ ✓ *23/3/26*
- * Cut and Wrap: Automatically ✓
- * Structure: Heavy Duty Ms ✓
- * Control Panel: with all new features

Dimension: ✓

Weight: ✓

Power Load: 10 hp. ✓

23/3/26
Approved
[Signature]