

- 2011	METER CALIBRATION													
		COIL AND TIMIN												
		FLOW RANGES AND CONNECTIONS												
	Frequency (Hz)	Period (s)	Period (ms) 50.0000	Voltage (mV)		Proteus Model		Flow Range						D
	20	0.0500				300	100XT	[L / m]		[G / m]		Inlet Port	Outlet Port	Port S
	30	0.0333	33.3333	156				Low	High	Low	High			'
	40	0.0250	25.0000	209		304L	100L	0.30	3.00	0.08	0.80	A	В	C
	50	0.0200	20.0000	252		301	100	0.40	3.80	0.10	1.00	A	В	0
	60	0.0167	16.6667	304		301	100	1.90	9.50	0.50	2.50	В	С	0
	70	0.0143	14.2857	352		303	100	3.00	22.70	0.80	6.00	D	С	0
	80	0.0125	12.5000	402		350	150	5.70	45.40	1.50	12.00	D	С	0
	90	0.0111	11.1111	454		355	155	15.10	75.70	4.00	20.00	D	С	0
	100	0.0100	10.0000	508		360	160	22.70	113.00	6.00	30.00	D	С	0
						370	170	37.80	227.00	10.00	60.00	D	С	1
						371	171	37.8	227	10	60	D	С	1.0
		9	0.009	111.1111111										
		NOTE:	Configuration	ay be nonpola	r									
	Model	Inlet Port	Outlet Port	Model Designation	Model Number	Polarity			0.366666667					
	100	A	В	100AB	0	In+								
	100	В	С	100BC	1	In+								
	100	D	С	100DC	2	Out+								
	300	-	-	300	3	Out+								
	300 Brass	-	-	300B	4	Out+								

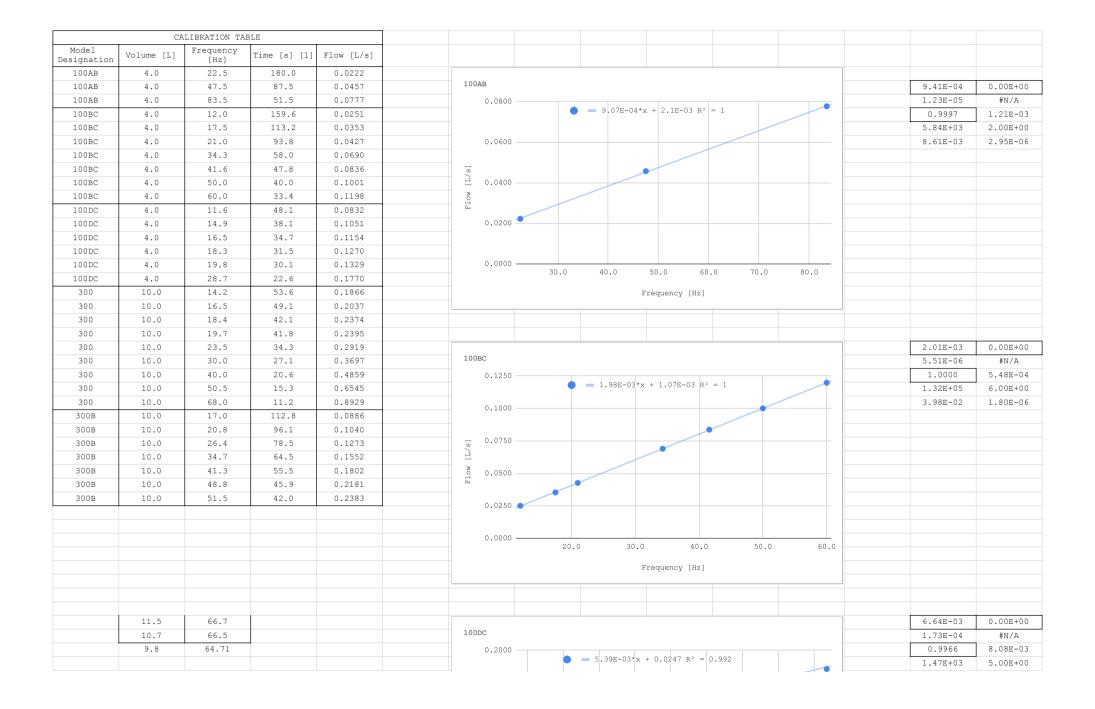

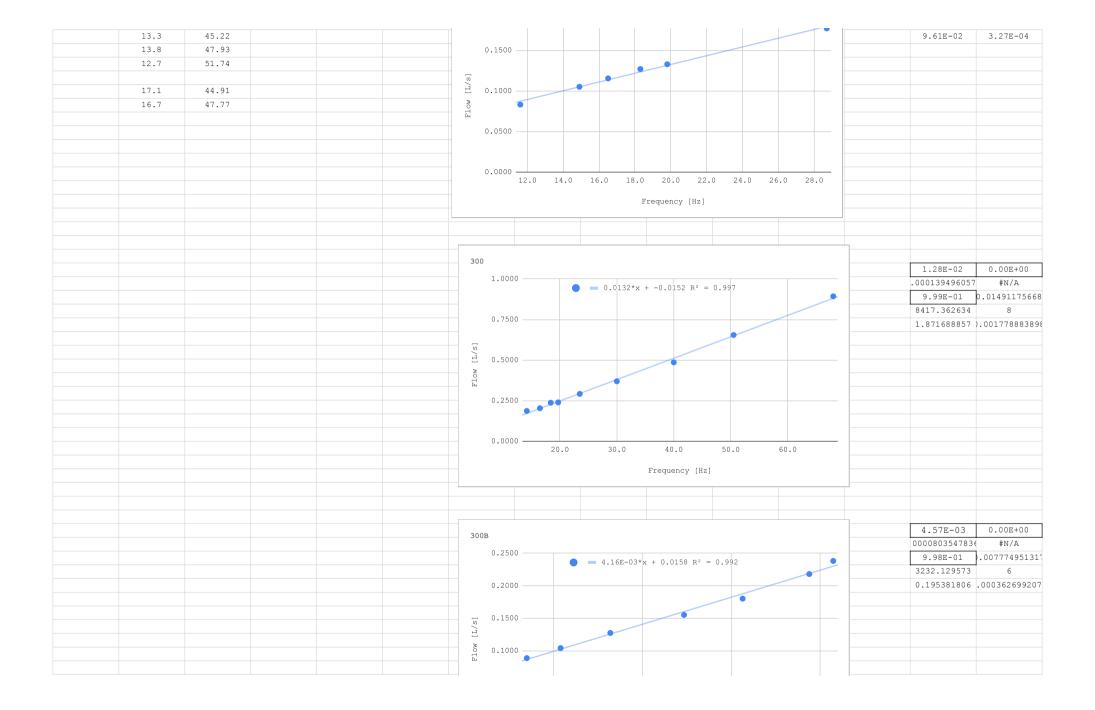

0.0500
0.0000
20.0 30.0 40.0 50.0
Frequency [Hz]

[1] Time to fill 1L beaker