


Instruction Manual

Smart Button



English

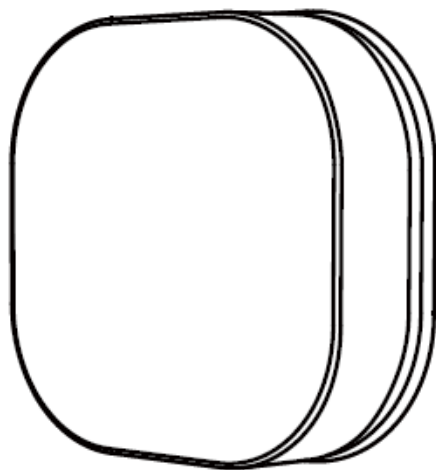

WORKS WITH
Google Assistant




WORKS WITH
alexa

- Bitte scannen Sie den QR-Code, um das deutsche Handbuch, das Installationsvideo und die Funktionseinführung zu erhalten
- Escanee el código QR para obtener el manual en español, el video de instalación y la introducción de la función
- Veuillez scanner le code QR pour obtenir le manuel en français, la vidéo d'installation et l'introduction des fonctions
- Отсканируйте QR-код, чтобы получить руководство на русском языке, видео по установке и описание функций
- Scansionare il codice QR per ottenere il manuale in italiano, il video di installazione e la guida alle funzionalità. Video di installazione e funzionalità
- Leia o código QR para obter o manual em português, o vídeo de instalação e a introdução das funções
- Zeskanuj kod QR, aby uzyskać instrukcje, filmy instalacyjne i funkcje
- من فضلك قم بمسح رمز الاستجابة السريعة (QR-code)، للحصول على دليل المستخدم باللغة العربية وفيديو التثبيت ووصف الوظائف

1 Specification

Power supply:	Battery CR2032 3V DC
Communication:	Zigbee 3.0* Bluetooth Low Energy*
Control distance:	50m open area
Ingress Protection:	IP55
Dimensions:	45 X 45 X 12.5mm
Operating temperature:	-10 °C~45 °C
Working Humidity:	<90%RH
Life of battery:	1 years (General use)
Product Size	45*45*12.5mm




45




12.5

*Available for selected model

2 Install the battery

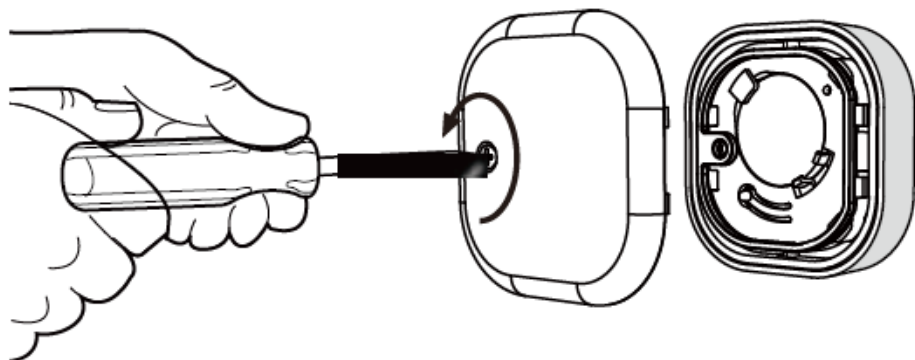

1. Remove the screw

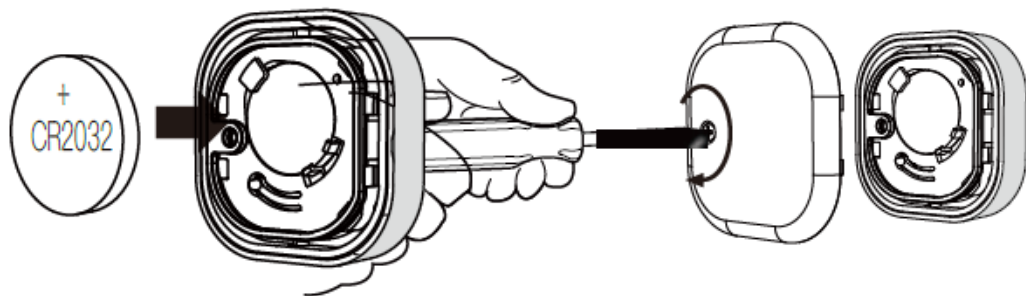

2. Install the CR2032 battery

3. Install the cover

3


Connet to Network

Scan the QR code to download APP



Gateway is require to connect device


4 Reaet / Paring

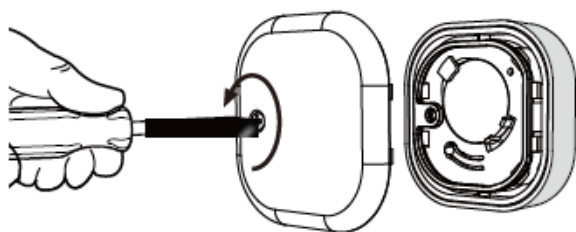

1. Remove the screw



2. Hold "RESET" to 6s

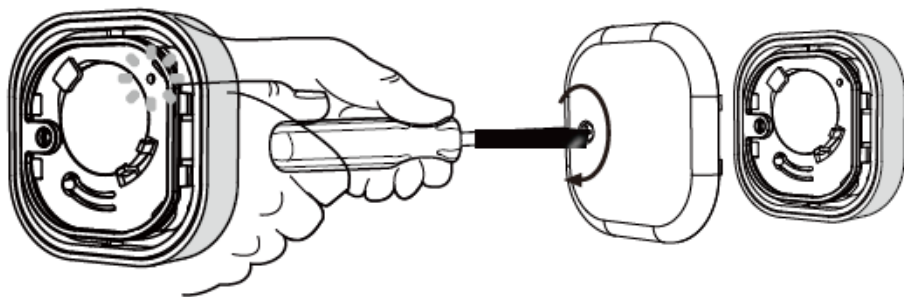


3. LED will start flashing


4. Install the cover

5

Remote mode

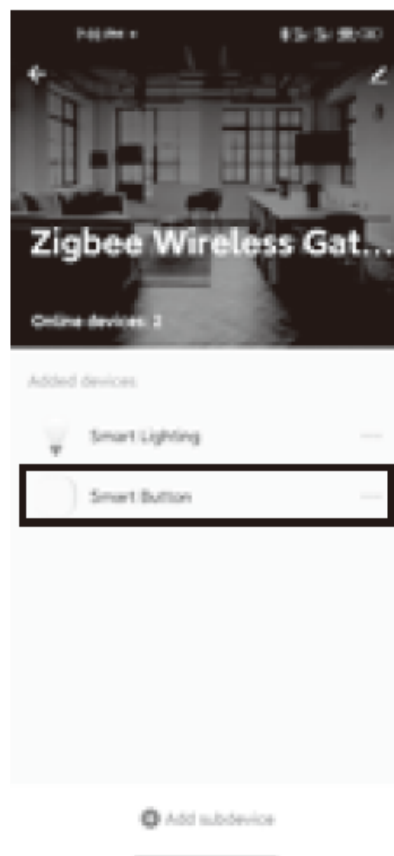


5.1 Remote mode

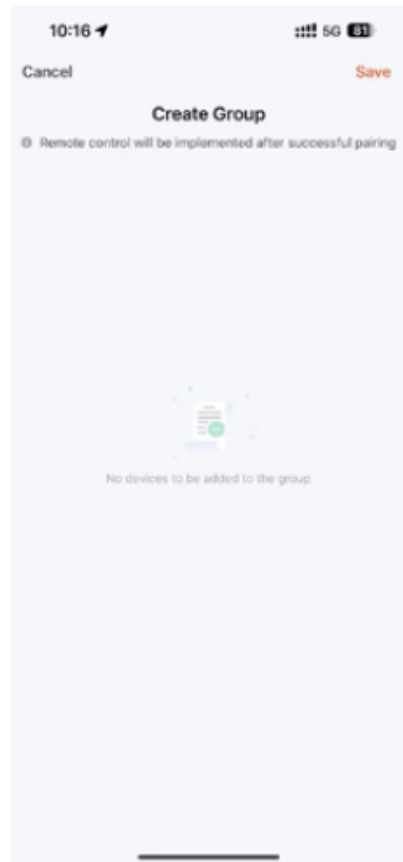

5.2 Remote mode



First time to add smart light MUST press the button to activate memory

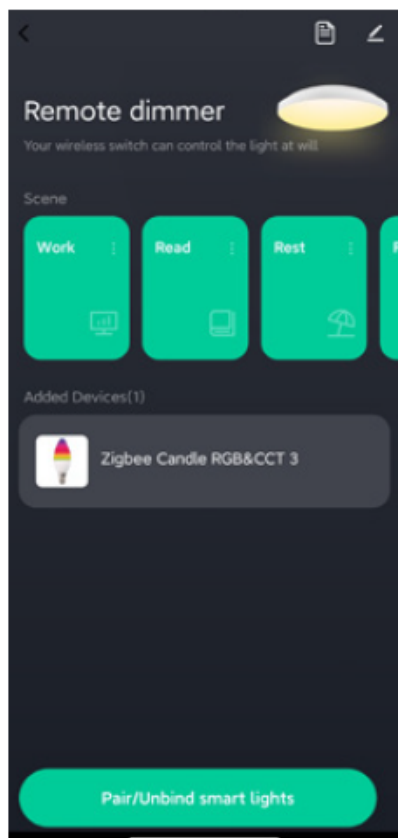

5.3 Remote mode

B. Control description under remote mode



Single Press
On



Single Press
Set the color
temperature



Dual Press
Off



Long Press >3s
Dimming

Note: The above functions may be different depending on the model of the smart bulb

5.4 Mode swap



3click





Remote
mode





Scenario
mode


5.5 Scenario mode

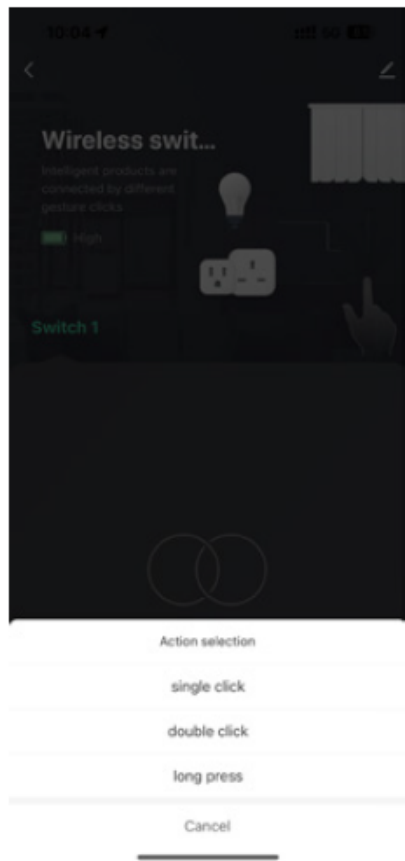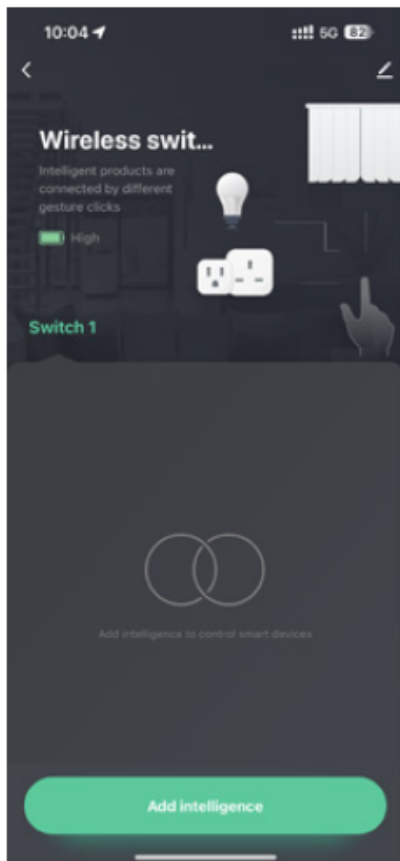

5.6 Scenario mode

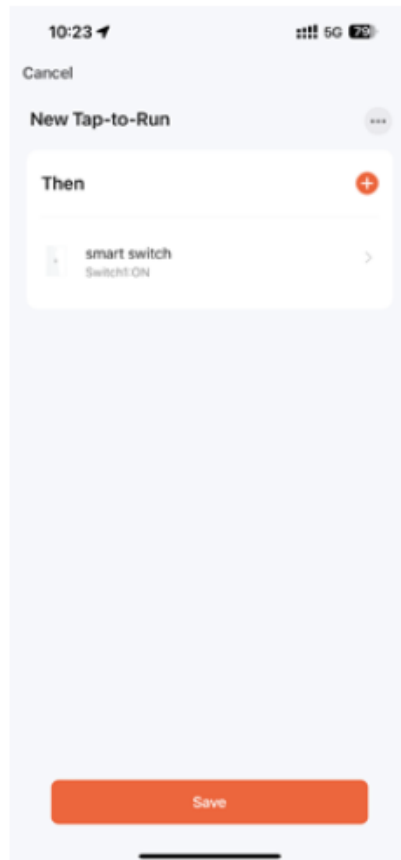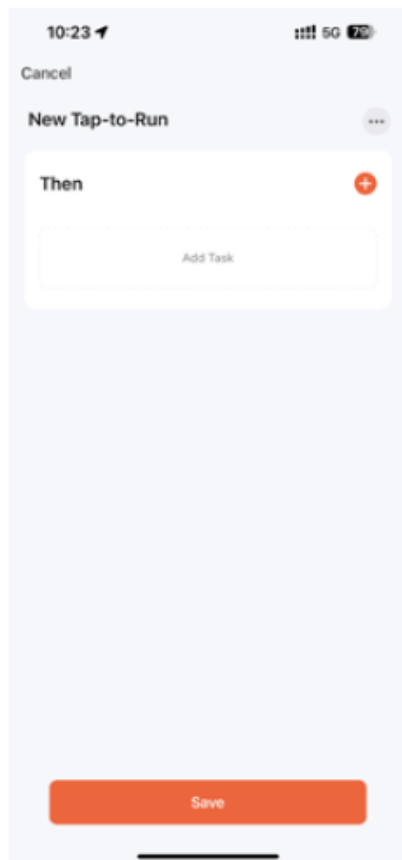

5.7 Scenario mode

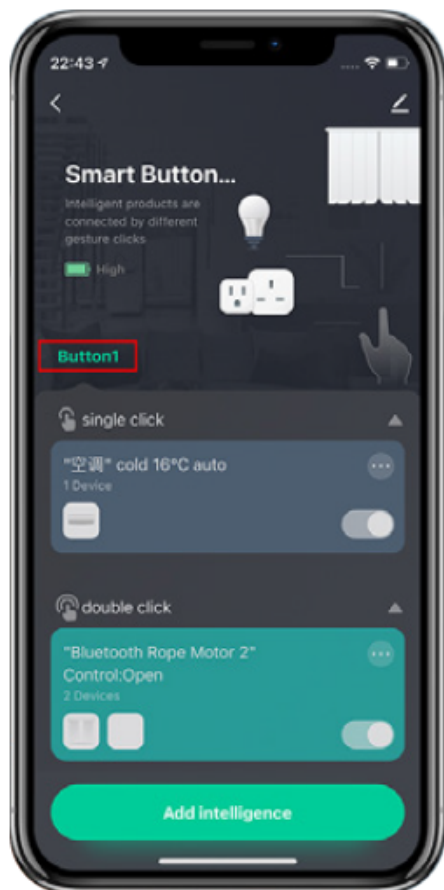

6 Download The MOES APP

1. Download MOES App on App store or scan the QR code



MOES App is upgraded as much more compatibility than Tuya Smart/Smart Life App, functional well for scene controlled by Siri, widget and scene recommendations as the fully new customized service.

(Note: Tuya Smart/Smart Life App still works, but MOES App is highly recommended)

2. Registration or Log in.

- Download “MOES” Application.
- Enter the Register/Login interface, tap “Register” to create an account by entering your phone number to get verification code and “Set password”. Choose “Log in” if you already have a MOES account.

Note:


If you have connected 5G WiFi network, please disconnect 5G WiFi network firstly and connect 2.4G WiFi network.

7 Steps for connecting the APP to the device

Ensure the device is within the effective signal coverage of your smart ZigBee gateway for successful connection into the ZigBee gateway in Smart Life APP.

Method One:


Scan the QR code to configure the network guide.
Make sure your Smart Life/Tuya Smart APP has successfully connected to a Zigbee gateway.




①



②



Scan this QR code




③

7.1 Steps for connecting the APP to the device


Method Two:

1. Make sure your MOES APP has successfully connected to a Zigbee gateway.

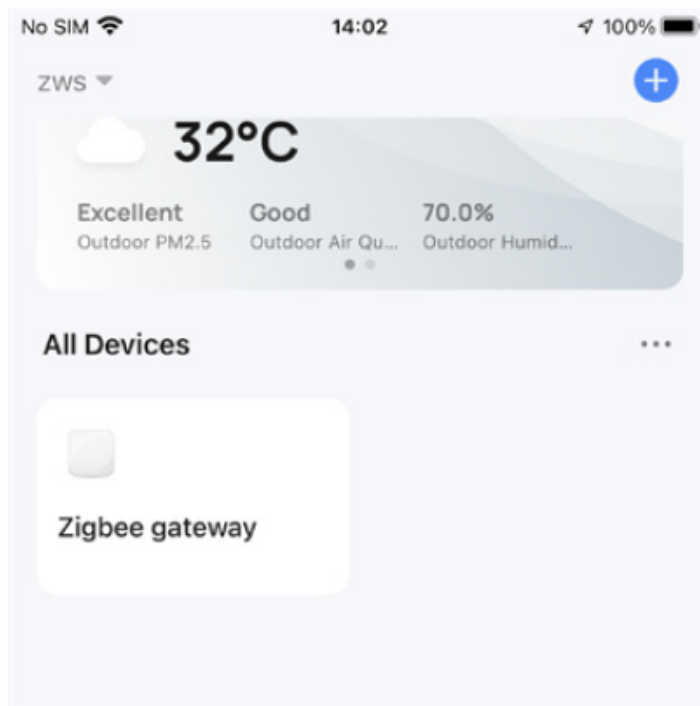



7.2 Steps for connecting the APP to the device

3. Enter the gateway. Please follow the picture below to finish as “Add subdevice→LED already blink, and the connecting will take about 10–120 seconds to complete depending on your network condition.

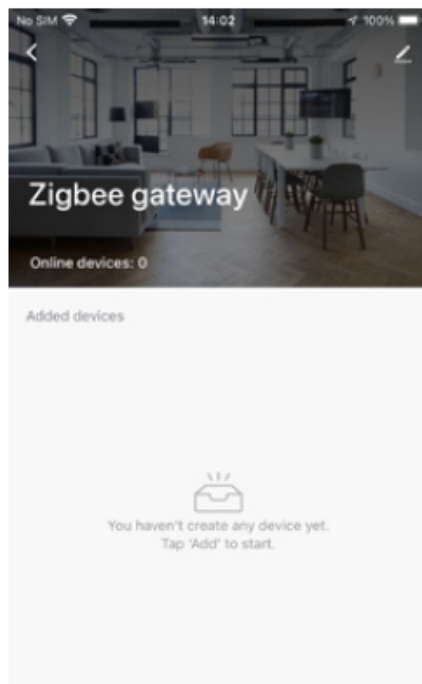


 Add subdevice

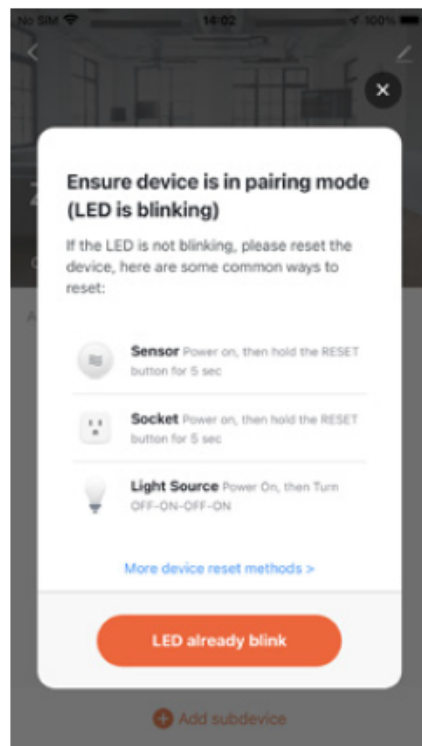

 Add subdevice

7.3 Steps for connecting the APP to the device

4. Add the device successfully, you can edit the name of the device to enter the device page by click “Done”.

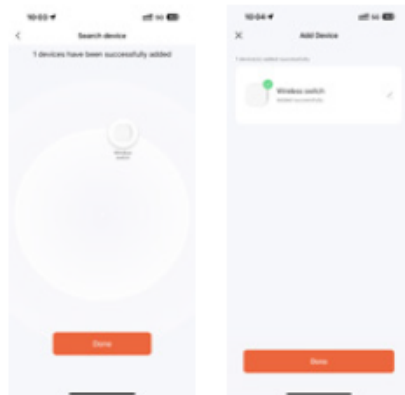

5. Click “Done” to enter the device page to enjoy your smart life with home automation.

