


Instruction détaillée en français


Il s'agit d'un microphone à condensateur professionnel, qui adopte le contrôle de circuit électronique complet et rigoureux et la capsule Diaphragm à plaque d'or. Le microphone avec un bon diagramme de détection polaire cardioïde, un rendement élevé, un faible bruit de sel. La reproduction fidèle du son même le plus subtil. Convient particulièrement pour les studios, les studios d'enregistrement, les stations de diffusion, les représentations sur scène et l'ordinateur. Répondre absolument au besoin de haute qualité pour la diffusion et l'enregistrement.

Instruction détaillée:

1. Au tout début, baissez le volume sonore au volume minimum.
2. Connectez l'alimentation fantôme au microphone.
3. Puis allumez l'interrupteur d'alimentation fantôme.
4. Augmentez lentement le volume sonore à un volume confortable afin de protéger le haut-parleur.

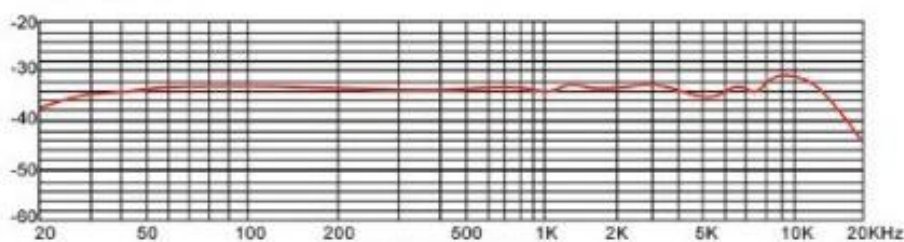

Graphique de réponse en fréquence

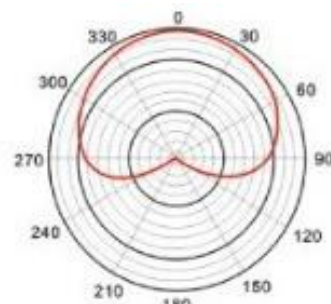

Unidirectionnel (à 1 KHz)

Spécification:

Motif polaire: Uni-directional
Fréquence de réponse: 20Hz-20KHz
Sensibilité: $-34\text{dB} \pm 2\text{dB}$ ($0\text{dB} = 1\text{V/Pa}$ at 1KHz)
Impédance de sortie: $150\Omega \pm 30\%$ (at 1kHz)
Impédance de charge: $\geq 1000\Omega$
Niveau sonore équivalent: 16dBA
Max.SPL: 130dB (at 1KHz $\leq 1\%$ T.H.D)
S/N Ratio: 78dB
Courant électrique: 3mA

Remarque:

- Si vous couvrez le haut du microphone à la main ou rapprochez le microphone du haut-parleur, il peut y avoir du bruit. Pour résoudre ce problème, baissez d'abord le volume de la voix, maintenez le microphone et le haut-parleur à une distance appropriée, pas face à face.
- Notre microphone à haute sensibilité, ne tombe pas de hauteur ou ne lui donne pas un coup
- Gardez-le propre et sec pendant son utilisation et son stockage.
- Tout problème de qualité, merci de nous contacter sur Cdiscount.

BROADCASTING AND RECORDING MICROPHONE

This is a professional condenser microphone, which adopts the exacting complete electronic circuit control and gold-plate Diaphragm capsule, the microphone with a good cardioids polar pickup pattern, high output, low self-noise, and the accurate Reproduction of even the most subtle sound, suitable especially for studios, recording studios, broadcasting stations, stage performances and computer. Absolutely fulfil the requirement of high quality for broadcasting and recording.


Specification:

Polar Pattern:Uni-directional
 Frequency Response:20Hz-20KHz
 Sensitivity: $-34\text{dB} \pm 2\text{dB}$ (0dB=1V/Pa at 1KHz)
 Output Impedance: $150\ \Omega \pm 30\%$ (at 1kHz)
 Load impedance: $\geq 1000\ \Omega$
 Equivalent noiselevel:16dBA
 Max. SPL:130dB (at 1KHz $\leq 1\%$ T. H. D)
 S/N Ratio:78dB
 Electrical current:3mA


Usage:

1. Turn on your amplifier or mixing board and set the volume control to minimum position, To connect the phantom power to the microphone turning on the phantom switch, Accommodate the volume control from low to high so obtained effect to your moderate level for protected the sauna from pounding.
2. If the head of the microphone is covered by hand or brought close to the speaker, a howling sound may be generated. To prevent this, first decrease the volume, then place the microphone so that it is not pointed to the speaker and that there is a sufficient distance between the microphone and speaker.
3. The sensitivity of cartridge is very fine, Don't drop, hit or apply strong shock to it.
4. To maintain the sensitivity and quality of sound reproducing, avoid exposing it to moisture and extreme temperatures.

Frequency Response Graph:

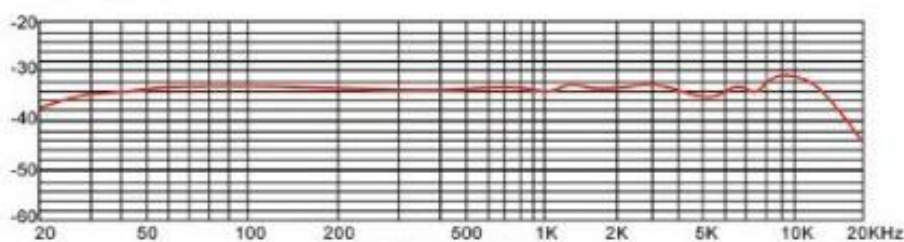

Frequency Response Graph

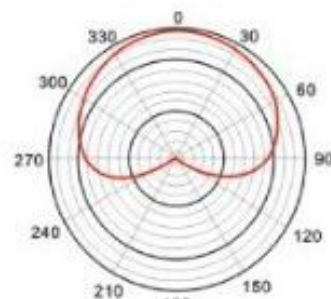

Uni-directional
(at 1KHz)

*The related specification or deployment are subject to change without any prior notification.

PRODUCTS SERVICE WARRANTY

NAME: _____ TEL: _____

ADD: _____

PRODUCT: _____ MODEL: _____

DATE: _____

Appreciating for purchasing our products, in order to ensure your benefit, please clear know the dealer of name, address, purchasing data record, and enjoys the after-sales service of our company, please initiative show your warranty card when you need our service so that enjoy the due rights and benefit.

Please note:

1. The receipt is warranty certificate please keeping safely, if you have lost, will not be return.
2. There are some problems of products, based on the corresponding invoice to the pits to guarantee repair within a year. Unless the events of force majeure damage, maintenance free of charge by our company.
3. There are some problems of products, based on the corresponding invoice to the pits to guarantee repair within a year. Unless the events of force majeure damage, maintenance free of charge by our company.

SALESPERSON' S SIGNATURE:

SHOP: TEL:

ADD: _____

附言栏

附言仁