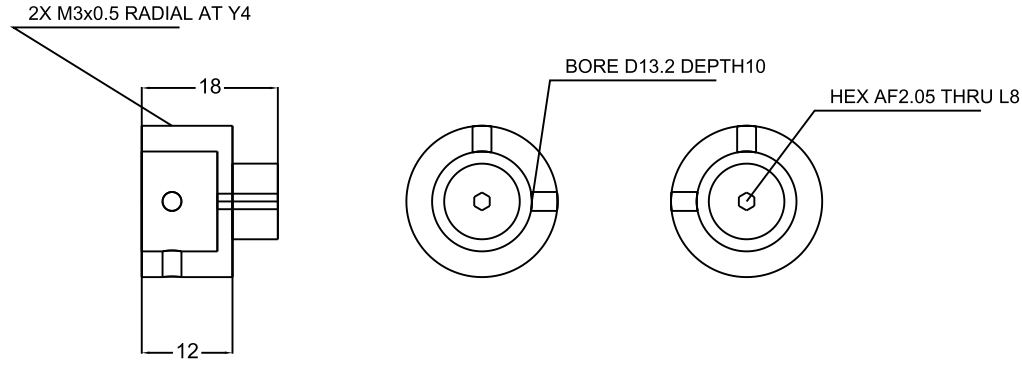


FZ-KZ-SL-R1 / R1 / mm / ENGINEERING REVIEW ONLY / 316L DEMAGNETIZE+PASSIVATE
OD20 LENGTH12; REAR BOSS OD10 LENGTH6; TOTAL18
FRONT BORE D13.2 DEPTH10; REAR HEX AF2.05 THRU LENGTH8; CONCENTRIC
2X M3x0.5 RADIAL THRU TO BORE; DRILL D2.5; AT Y4; CLOCK0/90; EFFECTIVE>=3.2
SOURCE KNOB D13; SET SCREWS M3x4 FLAT TIP; AXIAL KNOB FACE CLEARANCE1
LASER OD20 OPPOSITE SCREWS; AXIAL CENTER Y8; CHAR HEIGHT1.2; 316L DEMAGNETIZE/PASSIVATE