

V7-1A / V7 1英寸电动镜架 万能柱转接块

PLAN / mm / 1:1 / Origin lower-left / Z=0 at bottom bearing face


316L; demagnetize + passivate; nominal design; physical validation pending.

Threads: TAP-DRILL cylinder in STEP. See PDF thread/depth table. NOT CAM toolpath.

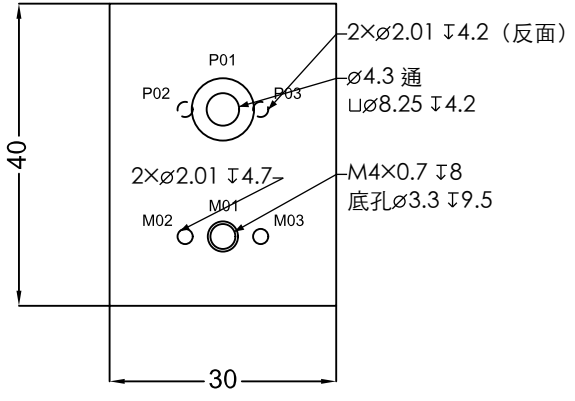



FRONT (-Y)



RIGHT (+X)

HOLE TABLE / depths from entry face

P01 X15 Y26 TOP D4.3 DRILL=THRU CB D8.25 DEPTH4.2

P02 X10 Y26 BOTTOM D2.01 DRILL=4.2 TIP=0.6039

P03 X20 Y26 BOTTOM D2.01 DRILL=4.2 TIP=0.6039

M01 X15 Y9.1779 TOP M4x0.7 TAP-D3.3 DRILL=9.5 THREAD=8 TIP=0.9914

M02 X10 Y9.1779 TOP D2.01 DRILL=4.7 TIP=0.6039

M03 X20 Y9.1779 TOP D2.01 DRILL=4.7 TIP=0.6039