

MCB-1R2 R2 / 316L / DEMAGNETIZE + PASSIVATE


FIRST ANGLE / mm / 1:1 / TOP below FRONT; RIGHT to left

RIGHT +X



FRONT -Y



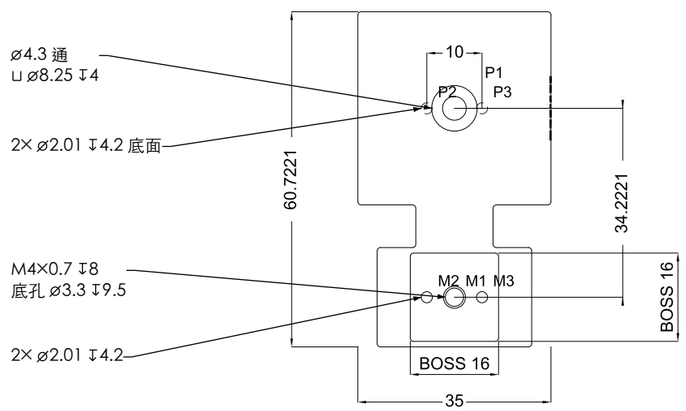

PLAN +Z / O=post centre; A=bottom Z0

HOLE TABLE / mm / DEPTH FROM SPECIFIED ENTRY

P1 X0 Y0 TOP ENTRY-Z9 D4.3 THRU TIP0 CB D8.25 DEPTH 4

P2 X-5 Y0 BOTTOM ENTRY-Z0 D2.01 CYL 4.2 TIP0.604

P3 X5 Y0 BOTTOM ENTRY-Z0 D2.01 CYL 4.2 TIP0.604

M1 X0 Y-34.2221 TOP ENTRY-Z12.1 M4x0.70 CYL 9.5 TIP0.992 TAP D3.3 THREAD 8

M2 X-5 Y-34.2221 TOP ENTRY-Z12.1 D2.01 CYL 4.2 TIP0.604

M3 X5 Y-34.2221 TOP ENTRY-Z12.1 D2.01 CYL 4.2 TIP0.604

OUTLINE VIRTUAL CORNERS BEFORE R0.6

V01 X-17.5 Y-17.5
V02 X-7 Y-17.5
V03 X-7 Y-25.2221
V04 X-14 Y-25.2221
V05 X-14 Y-43.2221
V06 X14 Y-43.2221
V07 X14 Y-25.2221
V08 X7 Y-25.2221
V09 X7 Y-17.5
V10 X17.5 Y-17.5
V11 X17.5 Y17.5
V12 X-17.5 Y17.5

FULL-HEIGHT MOUNT PEDESTAL / R0.6

X[-8,8] Y[-42.2221,-26.2221]

PLATE Z0..9; PEDESTAL Z9..12.1


FIT / GENERAL TOLERANCE / ROUGHNESS PENDING MANUFACTURING REVIEW.

M4 THREADS REPRESENTED BY TAP-DRILL SOLID; NOT A CAM-RELEASED FILE.

ENGRAVE MCB-1R2 ON +X; CENTRE Y0 Z4.5; GLYPH H2 DEPTH0.2

P1 CB TO P2/P3 WEB MIN 0.6187 mm; MANUFACTURING / STRENGTH REVIEW REQUIRED.

P1 TOP TOP-Z9




D4.3 +TIP 0

P2,P3 BOTTOM TOP-Z9




D2.01 +TIP 0.604

M1 TOP TOP-Z12.1



D3.3 +TIP 0.992

M2,M3 TOP TOP-Z12.1



D2.01 +TIP 0.604

STEP SHA256 3c6e03ac664646e14b688bdb2efda5dad312e2321e793641c08037d81f5327ed

DXF SHA256 27034bcd7cb4f44fcb593325183e09ece3e710e1e7e4c69bcca1c0bc286e094a

Editable DXF dimensions retained; A3 preview fitted to page; this preview is not 1:1 or a CAM toolpath.