

MCB-2R2 R2 / 316L / DEMAGNETIZE + PASSIVATE


FIRST ANGLE / mm / 1:1 / TOP below FRONT; RIGHT to left

RIGHT +X



FRONT -Y



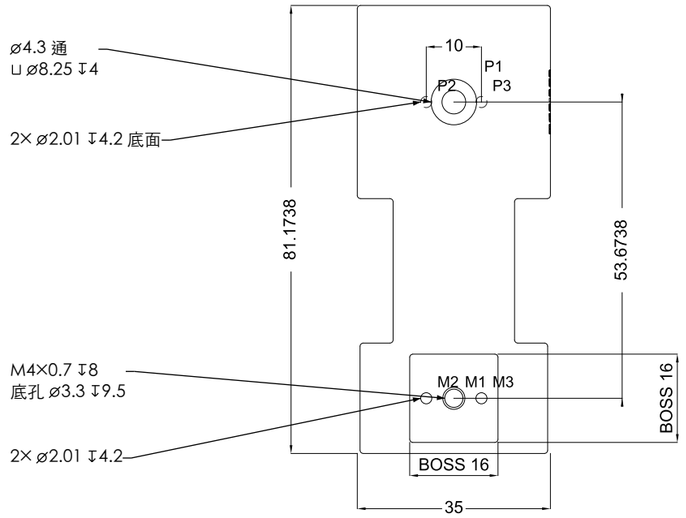

PLAN +Z / O=post centre; A=bottom Z0

HOLE TABLE / mm / DEPTH FROM SPECIFIED ENTRY

P1 X0 Y0 TOP ENTRY-Z9 D4.3 THRU TIP0 CB D8.25 DEPTH 4

P2 X-5 Y0 BOTTOM ENTRY-Z0 D2.01 CYL 4.2 TIP0.604

P3 X5 Y0 BOTTOM ENTRY-Z0 D2.01 CYL 4.2 TIP0.604

M1 X0 Y-53.6738 TOP ENTRY-Z14.4 M4x0.70 CYL 9.5 TIP0.992 TAP D3.3 THREAD 8

M2 X-5 Y-53.6738 TOP ENTRY-Z14.4 D2.01 CYL 4.2 TIP0.604

M3 X5 Y-53.6738 TOP ENTRY-Z14.4 D2.01 CYL 4.2 TIP0.604

OUTLINE VIRTUAL CORNERS BEFORE R0.6

V01 X-17.5 Y-17.5
V02 X-11 Y-17.5
V03 X-11 Y-43.6738
V04 X-17 Y-43.6738
V05 X-17 Y-63.6738
V06 X17 Y-63.6738
V07 X17 Y-43.6738
V08 X11 Y-43.6738
V09 X11 Y-17.5
V10 X17.5 Y-17.5
V11 X17.5 Y17.5
V12 X-17.5 Y17.5

FULL-HEIGHT MOUNT PEDESTAL / R0.6

X[-8,8] Y[-61.6738,-45.6738]

PLATE Z0..9; PEDESTAL Z9..14.4


FIT / GENERAL TOLERANCE / ROUGHNESS PENDING MANUFACTURING REVIEW.

M4 THREADS REPRESENTED BY TAP-DRILL SOLID; NOT A CAM-RELEASED FILE.

ENGRAVE MCB-2R2 ON +X; CENTRE Y0 Z4.5; GLYPH H2 DEPTH0.2


P1 CB TO P2/P3 WEB MIN 0.6187 mm; MANUFACTURING / STRENGTH REVIEW REQUIRED.

P1 TOP TOP-Z9




D4.3 +TIP 0

P2,P3 BOTTOM TOP-Z9




D2.01 +TIP 0.604

M1 TOP TOP-Z14.4



D3.3 +TIP 0.992

M2,M3 TOP TOP-Z14.4



D2.01 +TIP 0.604

STEP SHA256 25ace3712449ba5e9e1fd6d6a2a780ed6c3978bd5fb09d6f1299af1acc87e83c

DXF SHA256 254e903d0db6c705657a978862ffdc7413d5a8e7eecd0efd58d8b70d5c73d0e8

Editable DXF dimensions retained; A3 preview fitted to page; this preview is not 1:1 or a CAM toolpath.