

LS30-B R3-A7075-TABLE-MOUNT / 7075 ALUMINUM / BLACK ANODIZED


FIRST ANGLE / mm / 1:1 / TOP below FRONT; RIGHT to left

RIGHT +X



FRONT -Y



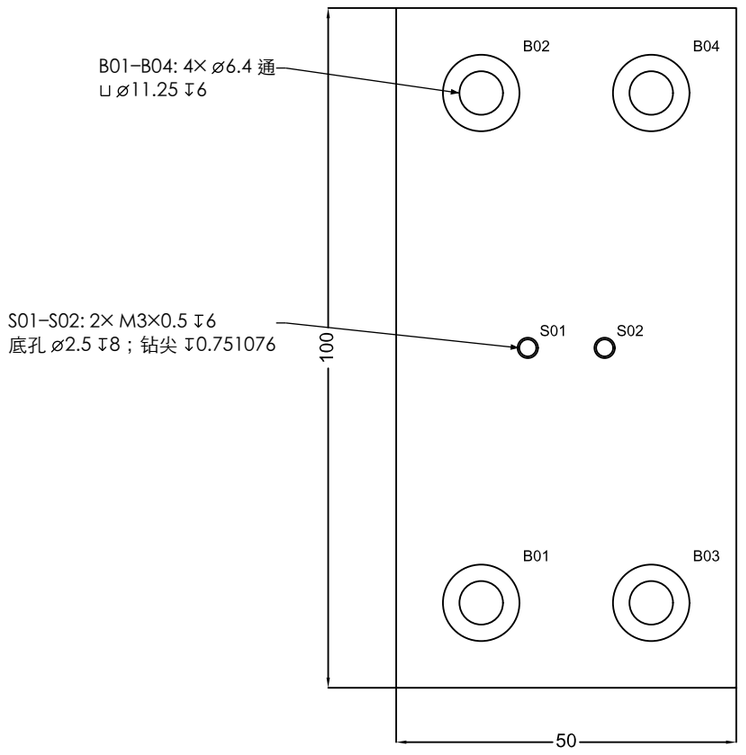

PLAN +Z / Origin lower-left; A bottom Z=0

HOLE TABLE - TOP ENTRY / mm

S01 X19.35 Y50 M3x0.5 DRILL 8 + TIP 0.7511 TAP D2.5 EFFECTIVE THREAD 6

S02 X30.65 Y50 M3x0.5 DRILL 8 + TIP 0.7511 TAP D2.5 EFFECTIVE THREAD 6

B01 X12.5 Y12.5 D6.4 THRU CB D11.25 DEPTH 6 FROM TOP

B02 X12.5 Y87.5 D6.4 THRU CB D11.25 DEPTH 6 FROM TOP

B03 X37.5 Y12.5 D6.4 THRU CB D11.25 DEPTH 6 FROM TOP

B04 X37.5 Y87.5 D6.4 THRU CB D11.25 DEPTH 6 FROM TOP

BENCH ASSEMBLE OEM + LOWER + UPPER R2; THEN PLACE COMPLETE MODULE ON TABLE.

INSTALL/REMOVE 4 EXTERNAL M6x12 WITHOUT REMOVING UPPER PLATE OR CARRIAGE.


D6.4 THRU + D11.25 CB6 FROM TOP; CLAMP6; TABLE ENGAGEMENT6; NO WASHERS.

25mm PITCH METRIC M6 OPTICAL TABLE. INCH TABLE NOT SUPPORTED.


ENGRAVE LS30-B on Y=0; X5 Z4.5; H3 STROKE0.22 DEPTH0.2

STEP SHA256 f6a21026771e56c079d6579af4307062474e7ba368af4e33cc768ca9b931fbaa

Simplified thread tap drills; not CAM released; physical validation pending.



S01/S02: M3x0.5 THREAD6; TAP D2.5 CYL8 + TIP0.7511



B01-B04: D6.4 THRU; CB D11.25 DEPTH6 FROM TOP