

MT1-T / MT1/M 上面包板

PLAN / mm / 1:1 / Origin lower-left / Z=0 at bottom bearing face


7075 aluminum alloy; black anodize; R1-A7075; geometry R1; physical validation pending.

Threads: TAP-DRILL cylinder in STEP. See PDF thread/depth table. NOT CAM toolpath.

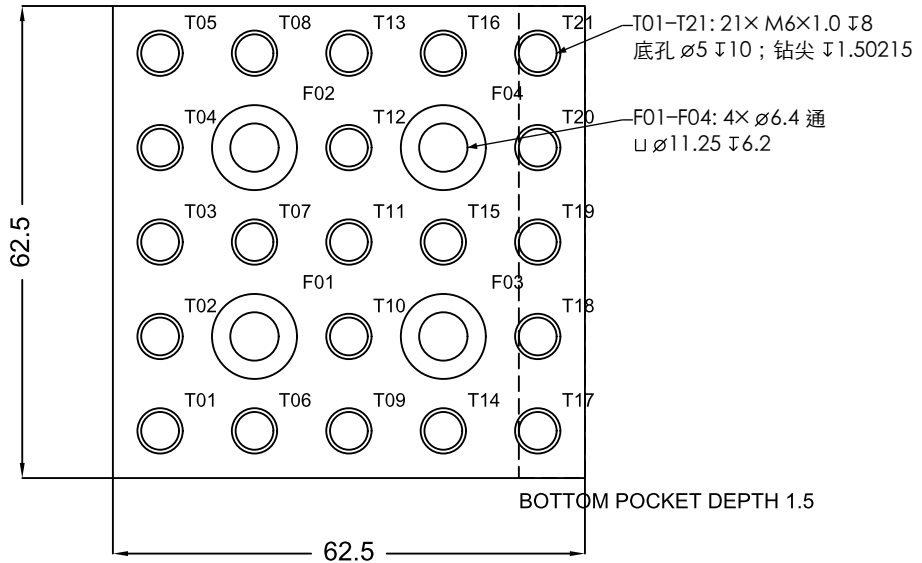



FRONT (-Y)



RIGHT (+X)

HOLE TABLE / depths from entry face

T01 X6.25 Y6.25 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

T02 X6.25 Y18.75 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

T03 X6.25 Y31.25 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

T04 X6.25 Y43.75 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

T05 X6.25 Y56.25 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

T06 X18.75 Y6.25 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

T07 X18.75 Y31.25 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

T08 X18.75 Y56.25 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

T09 X31.25 Y6.25 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

T10 X31.25 Y18.75 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

T11 X31.25 Y31.25 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

T12 X31.25 Y43.75 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

T13 X31.25 Y56.25 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

T14 X43.75 Y6.25 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

T15 X43.75 Y31.25 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

T16 X43.75 Y56.25 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

T17 X56.25 Y6.25 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

T18 X56.25 Y18.75 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

T19 X56.25 Y31.25 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

T20 X56.25 Y43.75 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

T21 X56.25 Y56.25 TOP M6x1.0 TAP-D5 DRILL=10 THREAD=8 TIP=1.5022

F01 X18.75 Y18.75 TOP D6.4 DRILL=THRU CB D11.25 DEPTH6.2

F02 X18.75 Y43.75 TOP D6.4 DRILL=THRU CB D11.25 DEPTH6.2

F03 X43.75 Y18.75 TOP D6.4 DRILL=THRU CB D11.25 DEPTH6.2

F04 X43.75 Y43.75 TOP D6.4 DRILL=THRU CB D11.25 DEPTH6.2