




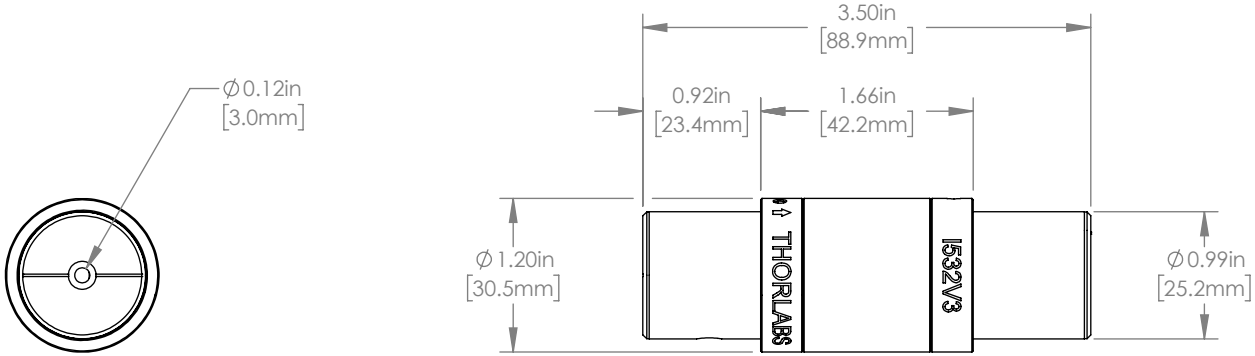



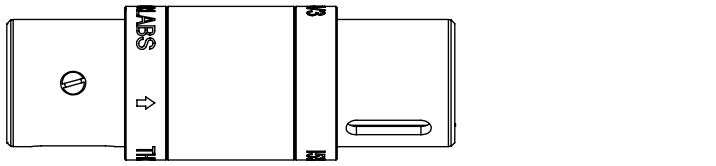

NOTES/SPECIFICATIONS:

1. CENTER WAVELENGTH: 532nm
2. TUNING RANGE: N/A
3. OPERATING RANGE: 527-537nm
4. PHYSICAL APERTURE: 3.0mm
5. MAX BEAM DIAMETER: 2.7mm
6. TRANSMISSION: 90% min @ 532nm
7. ISOLATION: 35 dB min @ 532nm
8. MAX POWER DENSITY: 20 kW/cm² CW, 500 MW/cm² PULSED
9. SCRIBE LINES INDICATE PLANES OF POLARIZATION

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	ET	14/NOV/24
APPROVAL	PH	9/APR/25

COPYRIGHT © 2024 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

FIXED FREE-SPACE ISOLATOR
532 nm, 2.7mm MAX BEAM

MATERIAL	REV
N/A	A

ITEM #	APPROX WEIGHT
I532V3	0.10 kg