

LS30-T R2-A7075 / 7075 ALUMINUM / BLACK ANODIZED


FIRST ANGLE / mm / 1:1 / TOP below FRONT; RIGHT to left

RIGHT +X



FRONT -Y



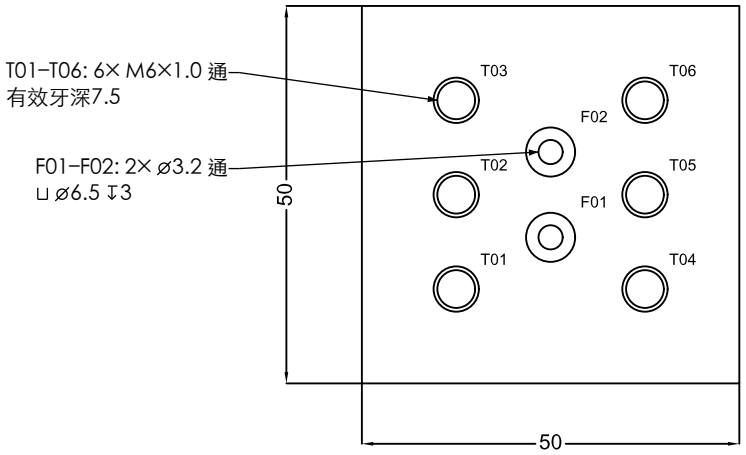

PLAN +Z / Origin (0,0) lower-left; A bottom Z=0

HOLE TABLE - TOP ENTRY / mm

T01 X12.5 Y12.5 M6x1.0 THRU / TAP D5 / EFFECTIVE THREAD 7.5

T02 X12.5 Y25 M6x1.0 THRU / TAP D5 / EFFECTIVE THREAD 7.5

T03 X12.5 Y37.5 M6x1.0 THRU / TAP D5 / EFFECTIVE THREAD 7.5

T04 X37.5 Y12.5 M6x1.0 THRU / TAP D5 / EFFECTIVE THREAD 7.5

T05 X37.5 Y25 M6x1.0 THRU / TAP D5 / EFFECTIVE THREAD 7.5

T06 X37.5 Y37.5 M6x1.0 THRU / TAP D5 / EFFECTIVE THREAD 7.5

F01 X25 Y19.35 D3.2 THRU CB D6.5 DEPTH 3 FROM TOP

F02 X25 Y30.65 D3.2 THRU CB D6.5 DEPTH 3 FROM TOP

FASTEN: 2 x M3x10 FROM TOP INTO VENDOR CARRIAGE; NO WASHERS.


CLAMP=5.5; ENGAGEMENT=4.5; SOURCE STRAIGHT BORE=5.8.

ENGRAVE LS30-T on Y=0; X=5 Z=2.75

H=3 STROKE=0.22 DEPTH=0.2

STEP SHA256 c2817caae94e20465a3d7a93fc8c5f3a738293abcd5689669a6f193bbc0e423a

Threads in STEP simplified to tap-drill. See PDF. Not CAM released.



F01 SECTION / D3.2 THRU + D6.5 CB 3 FROM TOP

A bottom Z=0 / Shoulder Z=5.5 / TOP Z=8.5