


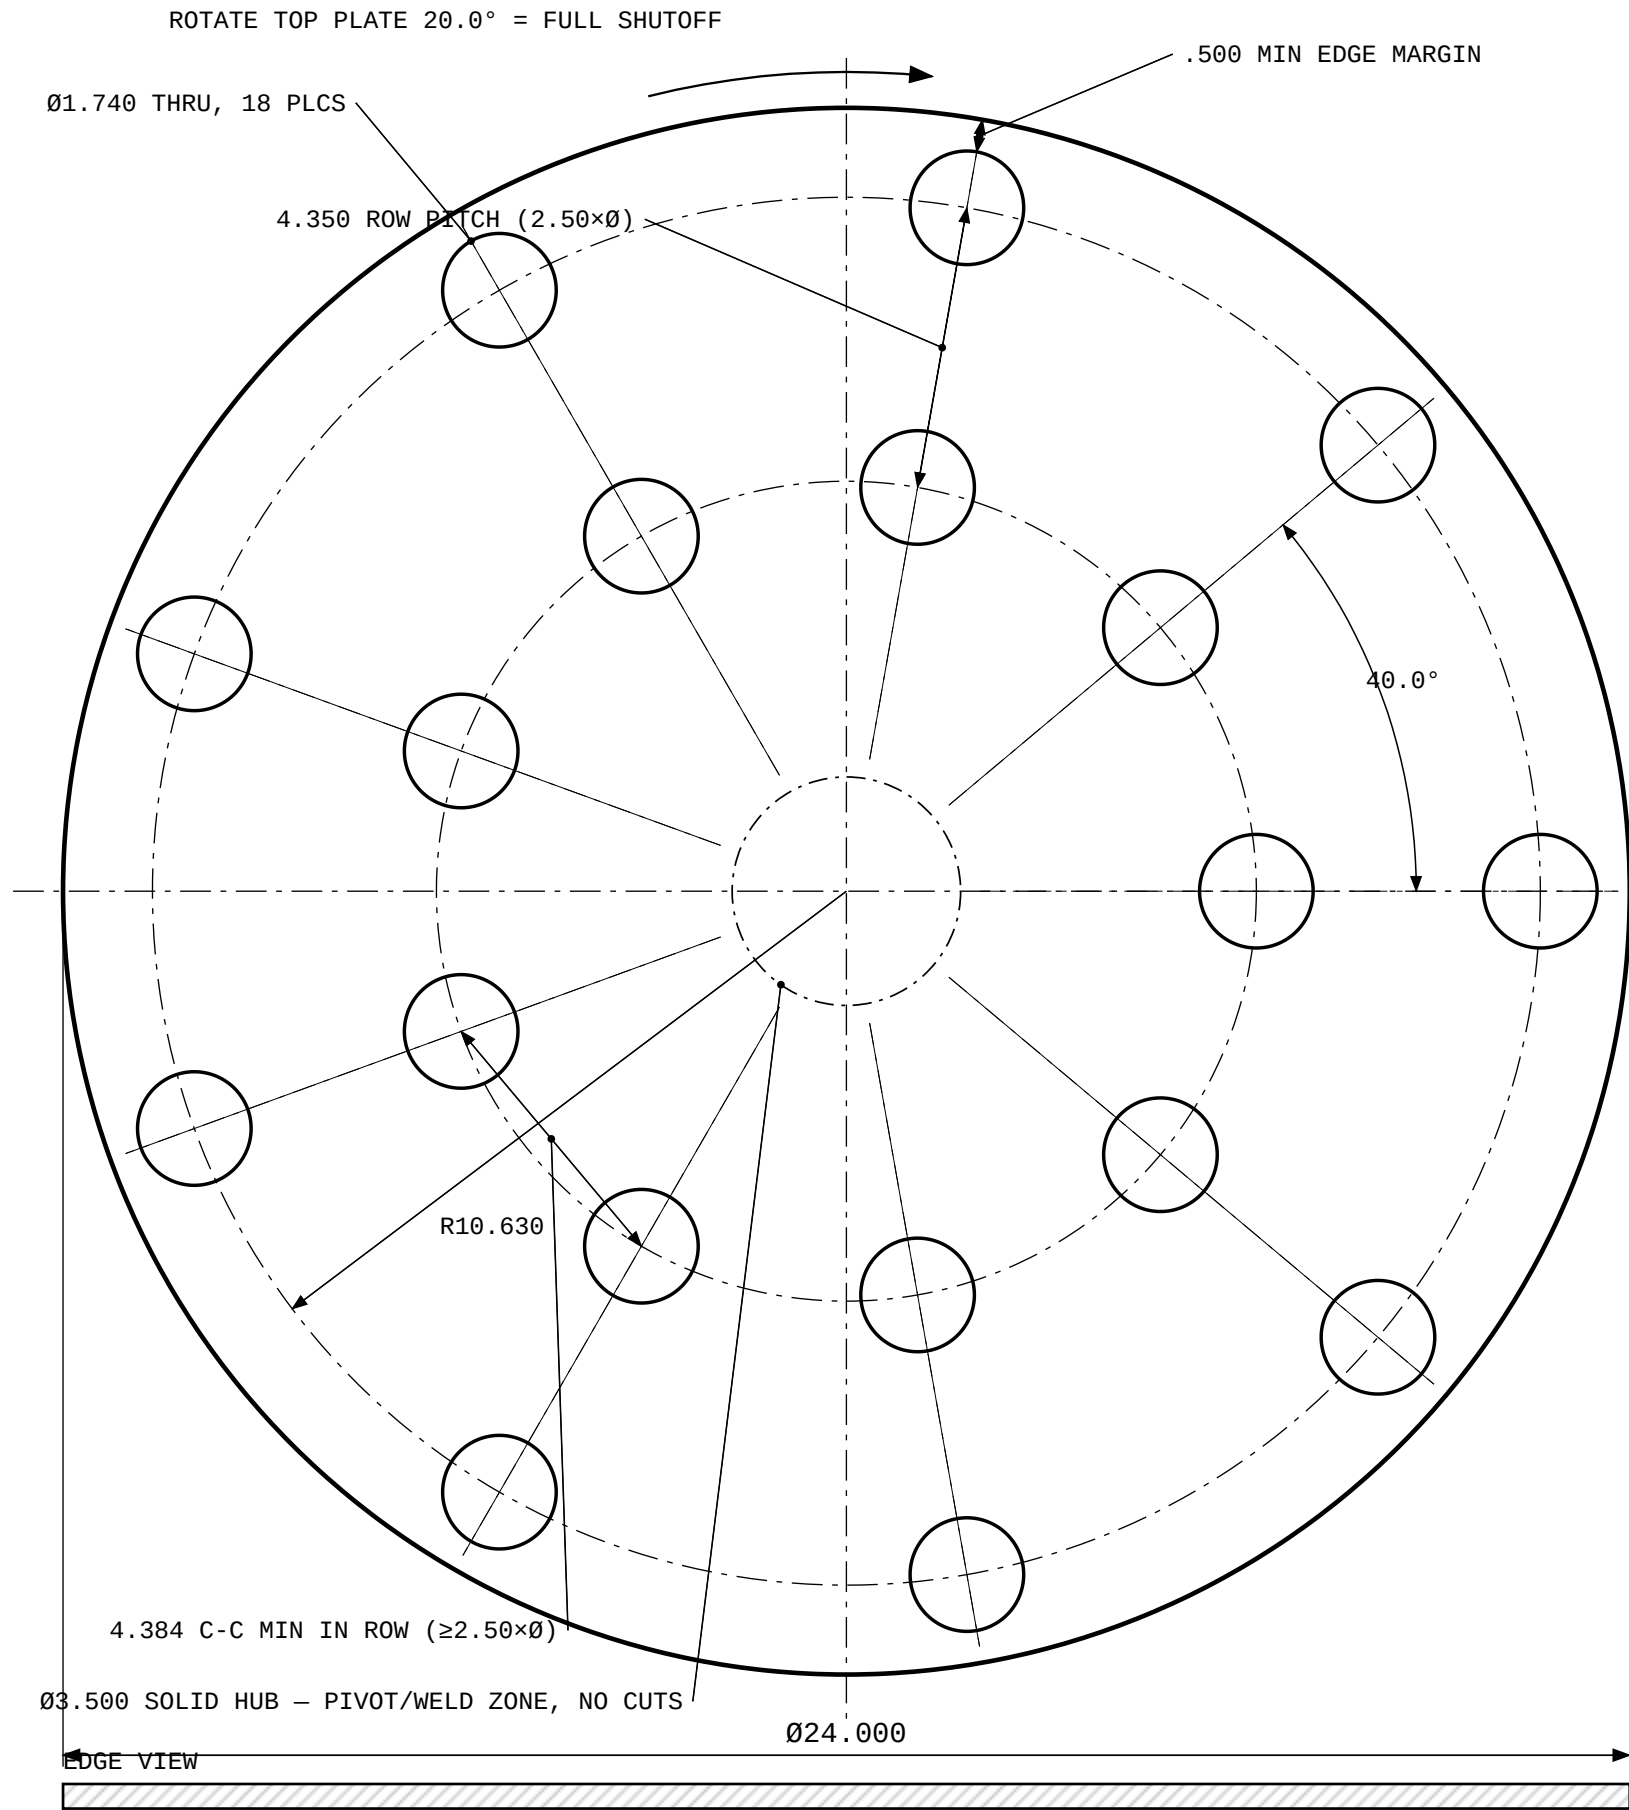


NOTES:

1. MATERIAL: ASTM A36 PLATE, .375 THK. QTY 2 – IDENTICAL PLATES, MATCHED ROTARY DAMPER PAIR.
 2. ALL FEATURES CNC WATERJET CUT THRU MATERIAL. NO DRILLING, CHAMFERS, OR COUNTERSINKS.
 3. OPERATION: PLATES STACKED FACE-TO-FACE ON COMMON HUB PIVOT. ROTATING TOP PLATE 20.0° MOVES EVERY HOLE ONTO SOLID WEB = FULL SHUTOFF. FLOW IS MONOTONIC: 5°=74%, 10°=41%, 15°=13%, 20°=0%.
 4. SEALING RULE: WEB BETWEEN HOLES = 1.5×Ø MIN (C-C = 2.5×Ø). CLOSED-POSITION SEAL COVER .441 MIN, VERIFIED OVER ALL HOLE PAIRS.
 5. 18 HOLES Ø1.740 ON 9 RADIAL SPOKES × 2 ROWS. SAME COUNT PER ROW REQUIRED SO ALL ROWS CLOSE AT ONE TWIST ANGLE.
 6. OPEN AREA (ALIGNED) 42.8 SQ IN = 9.5% OF GROSS. EST. WEIGHT 43.6 LB PER PLATE.
 7. CUT GEOMETRY: plate-24-perforated.dxf (CUT LAYER). KERF COMP BY SHOP. THIS PRINT GOVERNS DIMS.
 8. TOLERANCES UNLESS NOTED: .XXX ±.015, ANGLES ±0.5°.
- DEBURR BOTH FACES – PLATES MUST ROTATE FLUSH.

HOLE PATTERN TABLE (ALL HOLES Ø1.740)

ROW	RADIUS	QTY	FIRST HOLE	ANG PITCH
1	10.630	9	0.0°	40.0°
2	6.280	9	0.0°	40.0°
	TOTAL	18		

ANGLES CCW FROM +X AXIS. ROW RADII TO HOLE CENTERS.

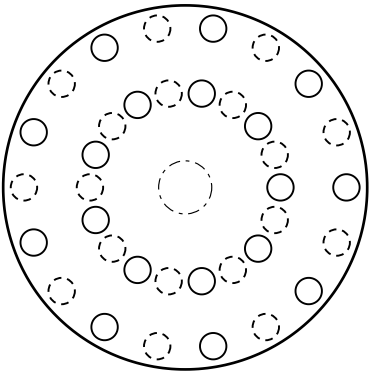

CLOSED POSITION – TOP PLATE +20.0° (DASHED)
EVERY HOLE ON SOLID WEB, .441 MIN COVER

OFFSET SMOKER PROJECT – WATERJET FABRICATION PRINT

ROTARY DAMPER PLATE, Ø24.00 (PAIR)	DWG NO: WPZ-PLT-001 REV B
MATL: ASTM A36 · THK .375 · QTY 2	SCALE: 34 PX/IN · UNITS: IN
REV B: RESPACED FOR ROTARY SHUTOFF	SHT 1/1 · 2026-07-06