


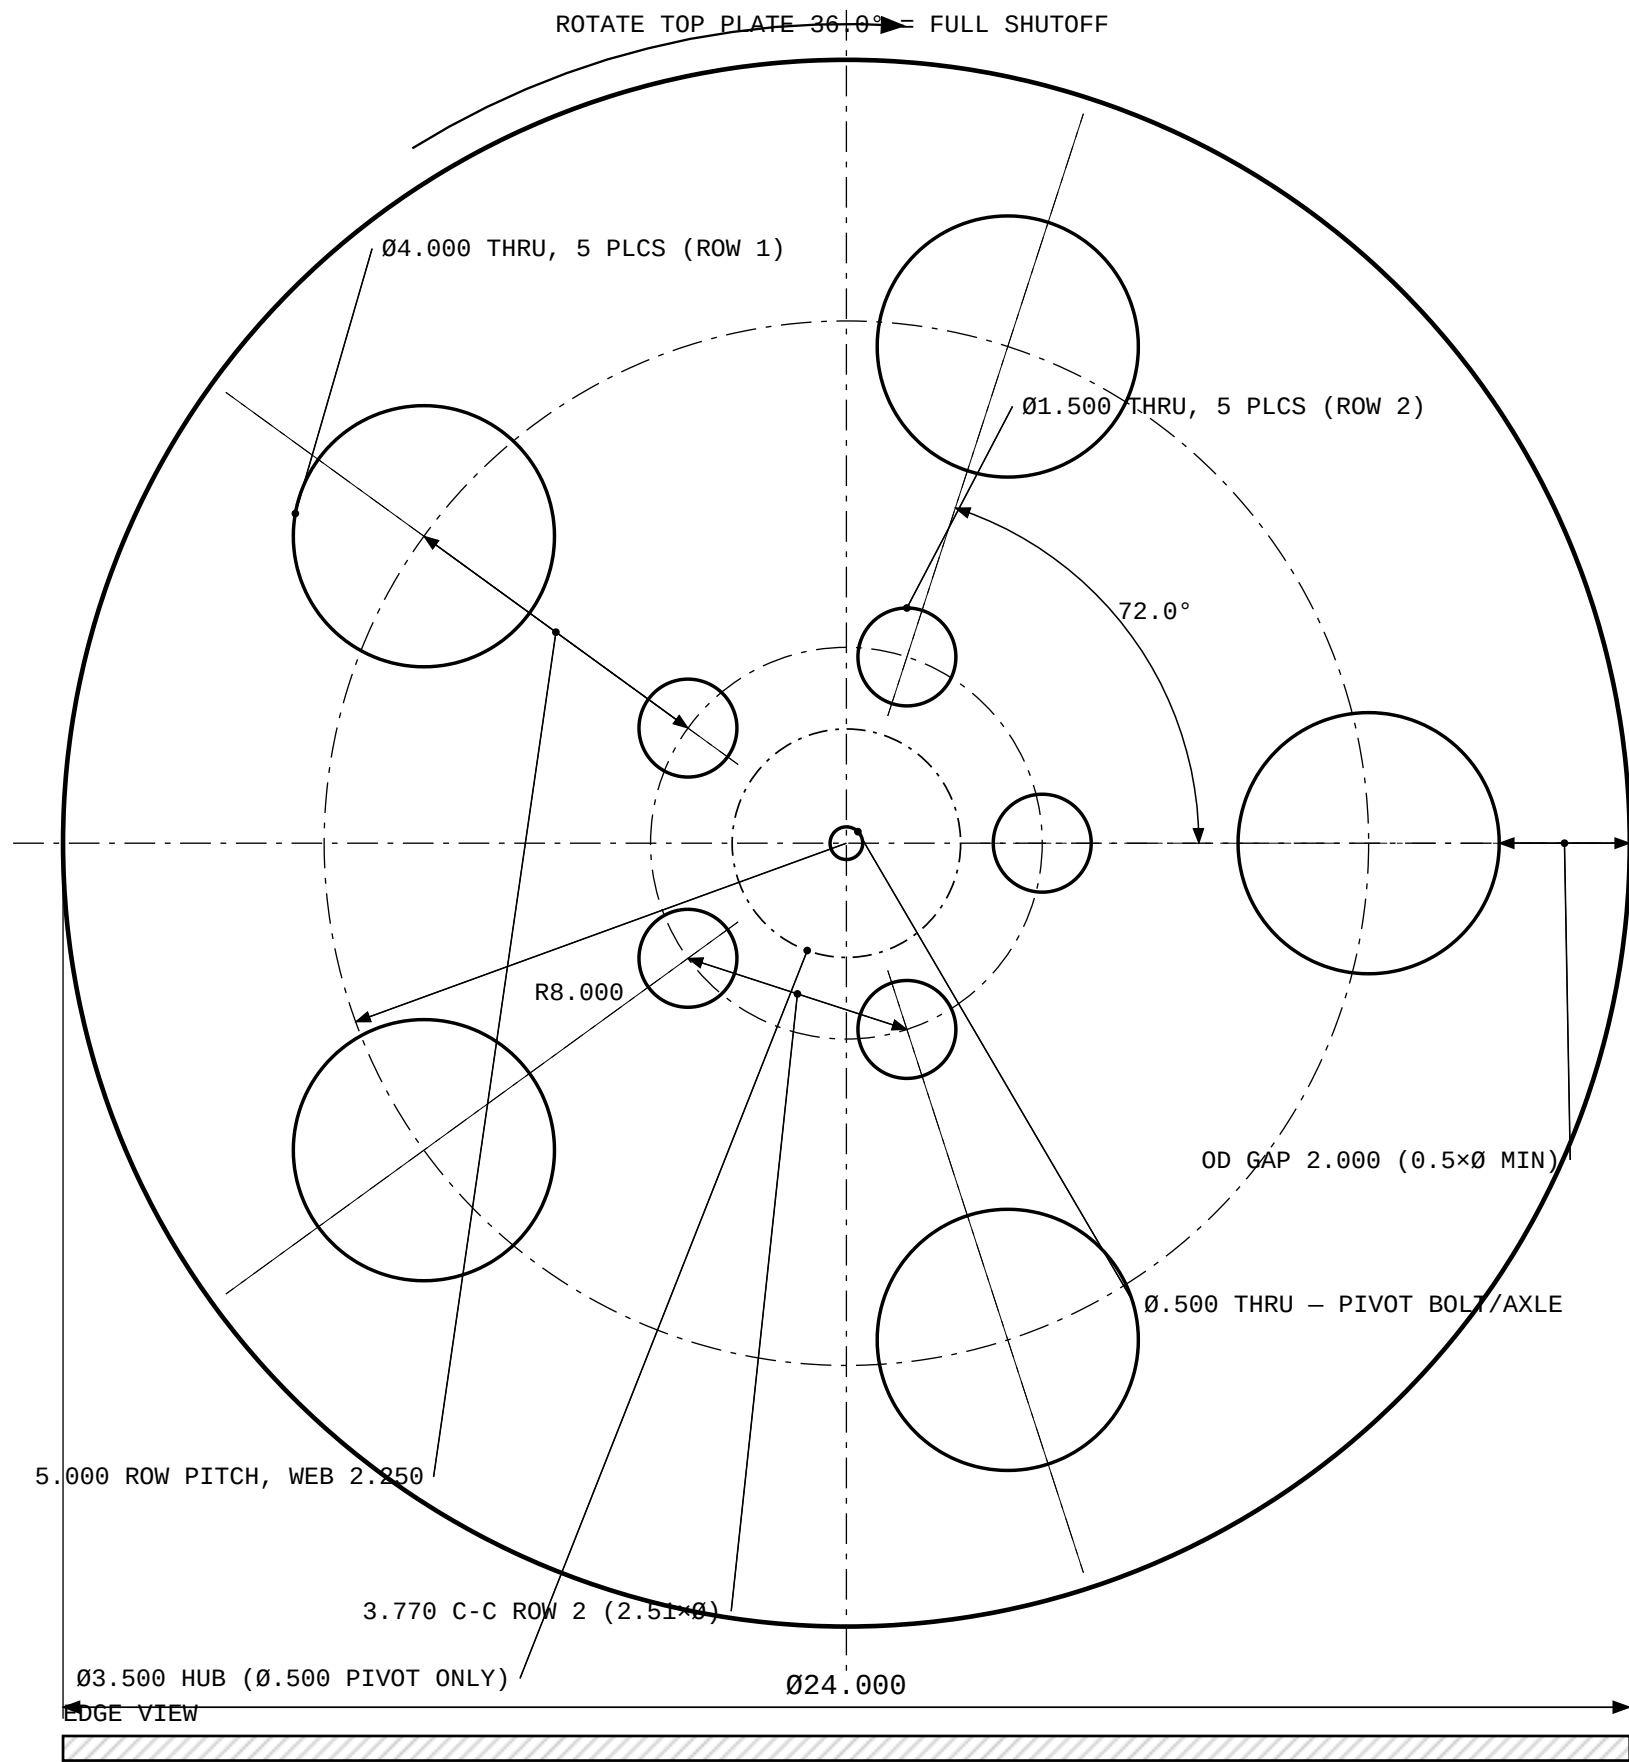


NOTES:

1. MATERIAL: ASTM A36 PLATE, .375 THK. QTY 2 – IDENTICAL PLATES, MATCHED ROTARY DAMPER PAIR.
2. ALL FEATURES CNC WATERJET CUT THRU MATERIAL. NO DRILLING, CHAMFERS, OR COUNTERSINKS.
3. OPERATION: PLATES STACKED FACE-TO-FACE ON COMMON HUB PIVOT. ROTATING TOP PLATE 36.0° MOVES EVERY HOLE ONTO SOLID WEB = FULL SHUTOFF. FLOW IS MONOTONIC: 9°=61%, 18°=26%, 27°=2%, 36°=0%.
4. SEALING RULE: WEB ≥ 1.5×Ø IN EACH ROW (C-C ≥ 2.5×Ø). CLOSED-POSITION SEAL COVER .354 MIN, VERIFIED OVER ALL HOLE PAIRS. RADIAL WEB 2.250 (1.5× ROW-2 Ø). OD-TO-HOLE GAP ≥ 0.5× ROW-1 Ø = 2.000.
5. 10 FLOW HOLES ON 5 SPOKES × 2 ROWS + Ø.500 CENTER PIVOT HOLE (FILLED BY AXLE BOLT – NO LEAK PATH). DIA PER ROW PER TABLE. SAME COUNT PER ROW SO BOTH ROWS CLOSE AT ONE TWIST ANGLE.
6. OPEN AREA (ALIGNED) 71.7 SQ IN = 15.8% OF GROSS. EST. WEIGHT 40.5 LB PER PLATE.
7. CUT GEOMETRY: plate-24-perforated.dxf (CUT LAYER). KERF COMP BY SHOP. THIS PRINT GOVERNS DIMS.
8. TOLERANCES UNLESS NOTED: .XXX ±.015, ANGLES ±0.5°. DEBURR BOTH FACES – PLATES MUST ROTATE FLUSH.

HOLE PATTERN TABLE

ROW	RADIUS	HOLE Ø	QTY	FIRST HOLE	PITCH
1	8.000	4.000	5	0.0°	72.0°
2	3.000	1.500	5	0.0°	72.0°
CTR	0.000	0.500	1	–	–
		TOTAL	11		

ANGLES CCW FROM +X AXIS. ROW RADII TO HOLE CENTERS.



OFFSET SMOKER PROJECT – WATERJET FABRICATION PRINT

ROTARY DAMPER PLATE, Ø24.00 (PAIR)	DWG NO: WPZ-PLT-001 REV E
MATL: ASTM A36 · THK .375 · QTY 2	SCALE: 34 PX/IN · UNITS: IN
REV E: ADD Ø.500 CENTER PIVOT HOLE	SHT 1/1 · 2026-07-06