BETTER mixing technology with mixing sense






The **PRIMETECH** PHM / PCM Heating/Cooling mixer combinations are used in many fields of processing thermoplasts or elastomeres. **PRIMETECH** PHM / PCM Heating/Cooling mixer combinations are used in processes, which require step by step heating and cooling of the product. Specific requirements of products are frequently very diverse.

PRIMETECH INDUSTRIES

HIGH SPEED MIXER AND COOLER

PHM HEATER MIXER

In a High speed mixer, the heat generated due to friction is utilised for mixing, hence it's known as "Heater mixer". High speed mixers are used to mix solid to solid, liquid and pasty components. The Heating phase in a heater mixer - it is not only the shortest possible cycle time which is the decisive factor, but in many cases, the way in which friction is introduced in to the product is of far greater importance.

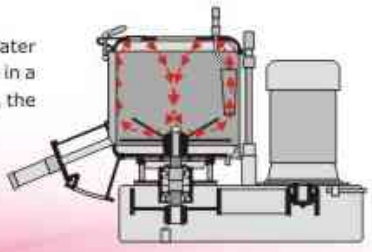



LID
High quality and pneumatically operated



DEFLECTOR
Influences the flow

BOTTOM RADIUS
Improves performance



MIXING TOOL
Process consistent and self cleaning



PNEUMA SEAL
Prevents powder infiltration into bearing




FEATURES OF HEATER MIXER

- Stainless steel vessel
- Corrosion and abrasion resistance
- Vessel-highly polished surface inside, discharge plate blended into bottom dish
- No deposits, crusts or pockets of colour
- Fast and complete discharge of the mixed material
- Easy and perfect cleaning
- Mixing tools-self cleaning, adjustable in height specific to the material being mixed, simple design, armoured leading edges
- Optimum adaptability to each type and size of mixing batch
- Optimum dispersion and distribution of components
- Improved tool life
- Quick, easy dismantling and reassembling
- Robust, easily serviced and maintained construction
- Long service life
- Low noise level
- Short maintenance and repair times
- Twin jacket
- For heating and cooling purposes

OPTIONAL FEATURES

- Chopper with separate drive
- Additional device for dispersion, especially for soft mixes
- Programmable logic control
- Optimum adaptability to the process requirements
- Constant high quality of the mixed material

PCM COOLER MIXER



The hot mixture should be cooled subsequently in "Cooler mixer" in order to keep it in a free flow condition, suitable to storage, transportation and subsequent treatment. Also helps in case of PVC dryblend staticfree, heat stabilized and stressfree compound. The cooling phase - a large number of additional process steps are required. Good heat transfer co-efficients, necessary for obtaining short cooling times are essential for high throughput capacities. Mixing and dispersing processes and also de-agglomeration are frequently of equal importance as factors concerning the handling of the machines.





LID
High quality with safe and effective lid opening



COOLING CONE
Highest cooling performance through unique material guidance & active material circulation

BOTTOM RADIUS
Inside wall polished to mirror finish



MIXING TOOLS
Process enhancing and self cleaning



DISCHARGE VALVE
Piston type valve pneumatically operated

FEATURES OF COOLER MIXER

- Stainless steel vessel
- Corrosion and abrasion resistance
- Vessel-highly polished surface inside, discharge plate blended into bottom dish
- No deposits crusts or pockets of colour
- Fast and complete discharge of the mixed material
- Easy and perfect cleaning
- Mixing tool
- Self-cleaning, quick, easy fitting and removal
- Twin jacket for cooling with forced circulation of cooling water
- Optimum dimensions of cooling surface
- Intensive cooling of the mixed material
- Cooling cone
- Increased cooling surface
- Reduction in cooling-time through forced circulation of the batch being mixed
- Robust, easily serviced and maintained construction.
- Long life
- Low noise level
- Maintenance and repair takes little time.

OPTIONAL FEATURES

- Jacketed lid
- Greater cooling surface
- Shorter cooling cycle time
- Chopper with separate drive
- Avoids lump formation
- Homogenization of the mixing batch

HIGH SPEED MIXER AND COOLER

HEATER MIXER - PHM

SR. NO.	MODEL	CHARGE BATCH CAPACITY (IN KGS.)	CONTAINER CAPACITY (IN LTRS.)	* PRODUCTION CAPACITY / HR. (IN KGS.)	DRIVE (IN kW)	MOTOR SPEED (IN RPM)	TOOL SPEED (IN RPM)	SUITABLE SUGGESTED COOLER MIXER
1	PHM-10	3	10	15	2.2 / 3.7	1500 / 3000	750 /1500	PCM-40
2	PHM-50	15	50	75	5.5 / 7.5	1500 / 3000	500 / 1000	PCM-150
3	PHM-130-R	40	130	200	12 / 15	1500 / 3000	500 / 1000	PCM-400
4	PHM-130	40	130	200	15 / 18	1500 / 3000	500 / 1000	PCM-400
5	PHM-200-R	70	200	350	26 / 31	1500 / 3000	500 / 1000	PCM-400 / 600
6	PHM-200	70	200	350	32 / 38	1500 / 3000	500 / 1000	PCM-400 / 600
7	PHM-250-R	90	250	450	32 / 38	1500 / 3000	500 / 1000	PCM-600
8	PHM-250	90	250	450	38 / 45	1500 / 3000	500 / 1000	PCM-600
9	PHM-350-R	120	350	600	38 / 56	750 / 1500	430 / 860	PCM-600 / 1000
10	PHM-350	120	350	600	46 / 67	750 / 1500	430 / 860	PCM-600 / 1000
11	PHM-500	200	500	1000	110	200 - 1500	100 - 800	PCM-1500 / 2000
12	PHM-750	300	750	1500	132	200 - 1500	100 - 650	PCM-1500 / 2000

COOLER MIXER - PCM

SR. NO.	MODEL	CHARGE BATCH CAPACITY (IN KGS.)	CONTAINER CAPACITY (IN LTRS.)	* PRODUCTION CAPACITY/HR. (IN KGS.)	DRIVE (IN kW)	TOOL SPEED (IN RPM)	COOLING SURFACE (IN m^2)
1	PCM-40	4	40	20	0.75	150	1.3
2	PCM-150	25	150	125	1.5	90	1.7
3	PCM-400	75	400	375	3.7	72	3.5
4	PCM-600	160	600	800	5.5	72	5.0
5	PCM-1000	200	1000	1000	7.5	60	6.5
6	PCM-1500	350	1500	1750	11	55	8.0
7	PCM-2000	500	2000	2500	18	50	11.0

* Production capacity is based on 5 batches/hr.

- Specifications are indicative & as a part of our continuous development, we reserve the right to change specifications without prior notice.
- For customized application the specifications can be altered.
- Output depends on type of material, formulations, processing parameters and ambient temperature.

PRIMETECH INDUSTRIES

Plot No. : 4716 & 4717 Phase - 4, Opp. Water Tank,
G. I. D. C., Vatva, Ahmedabad - 382 445. Gujarat,(India).
Phone : (O) +91-79-2584 1883 / 6450 1883
Telefax : +91-79-2584 1993
E-mail : primetechindustries@yahoo.co.in / nmpatel@eth.net