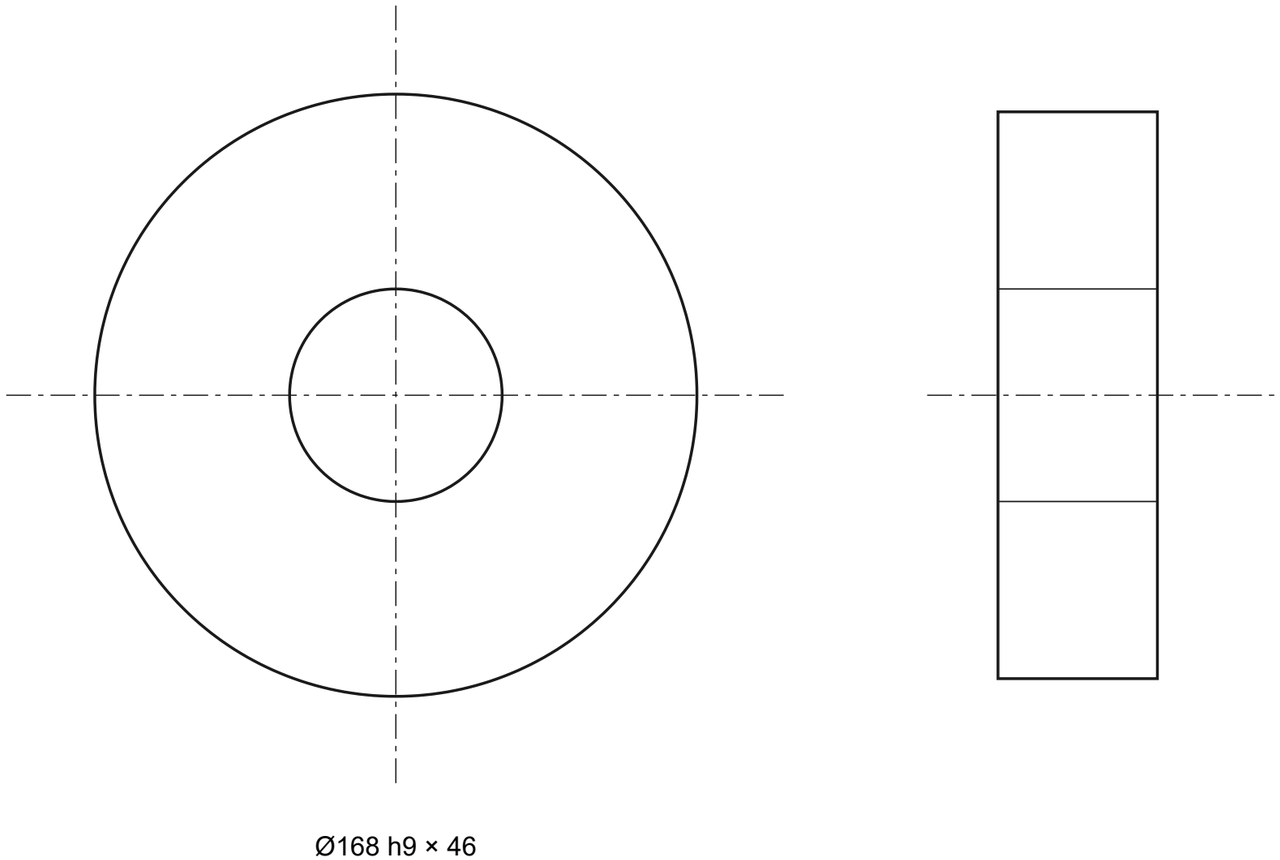

NOTES

1. ISOTHERMAL ANNEAL 160–200 HB
2. PHOSPHATE AND OIL AFTER MACHINING
3. FACE RUN-OUT 0.05 MAX
4. ALL DIMENSIONS IN MM

CUSTOMER **COMPANY D — DRIVETRAINS**			SHEET **1 OF 1**
PART NAME **GEAR BLANK**		PART NO **DRV-GB-2207**	REV **C**
DRG NO **DRV-GB-2207**	MATERIAL **20MnCr5**	WEIGHT **1.12 KG**	SCALE **1:1**
TOLERANCES UNLESS STATED ISO 2768-mK		PROJECTION First angle	UNITS mm