

Cygnus Cell Technologies®

Product Datasheet / Safety & Handling Information

Manufactured by: Cygnus Cell Technologies.
Supplied as 21700 cylindrical cells, 50 cells per transport tray.
Store at $20 \pm 5\text{ }^{\circ}\text{C}$ and 30–50 % state of charge, in a dry area away from direct sunlight.

Electrical ratings are summarised in the table below. Refer to the discharge characteristic on page 2 and the production grading summary on page 3 for the qualified operating window and graded capacity band.

Cygnus Cell Technologies — Electrical Ratings

Model CYG-21700-50G (21700 cylindrical, NMC811 / Graphite-SiOx)

Parameter	Value	Condition
Nominal voltage	3.63 V	—
Charge voltage (max)	4.20 V	CC-CV, 25 °C
Discharge cut-off (min)	2.50 V	25 °C
Rated capacity	5.00 Ah	0.5C, 25 °C

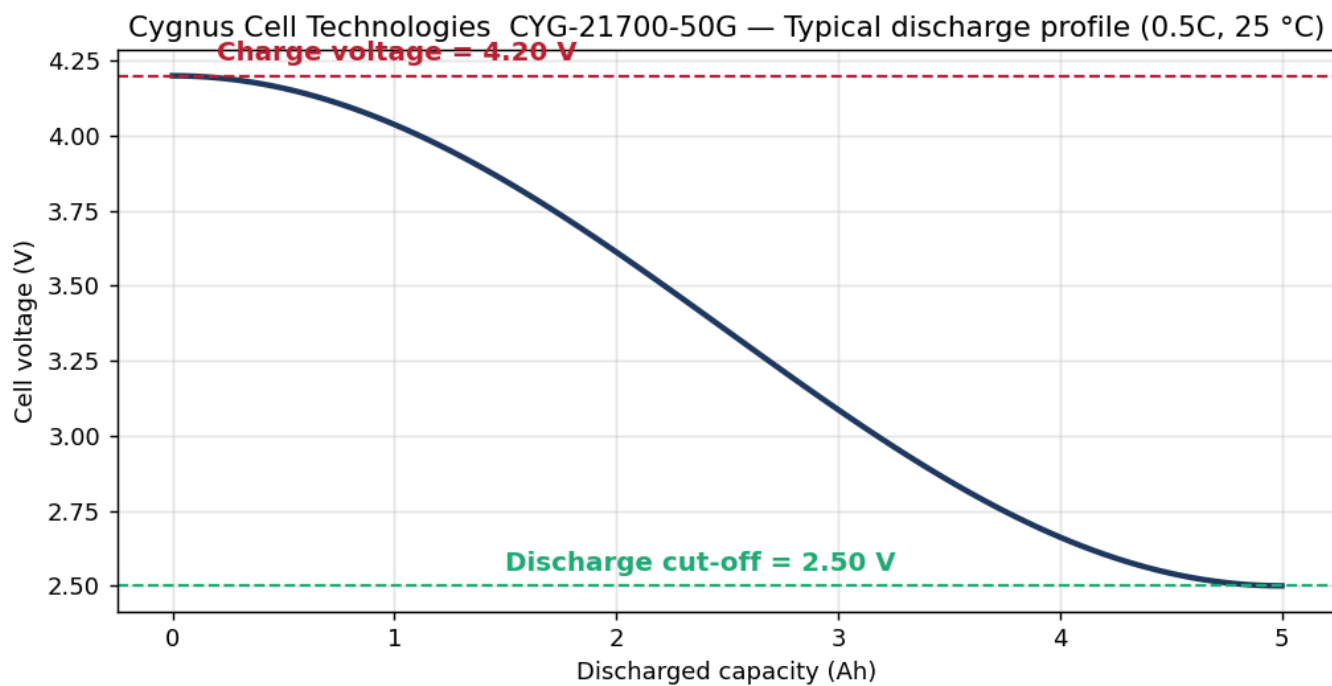


Figure 1. Typical discharge characteristic. The charge and discharge limits shown define the qualification voltage window.

CYG-21700-50G — Production Capacity Grading (lot mean)

Grade	Capacity band (Ah)	Lot share
Grade C	4.85 – 4.92	8 %
Grade B	4.92 – 4.98	26 %
Grade A	4.98 – 5.05	66 %
Lowest graded capacity	4.85	min
Highest graded capacity	5.05	max