

Auriga Energy™

Product Datasheet / Safety & Handling Information

Manufactured by: Auriga Energy.
Delivered as hard-case prismatic modules, 12 cells per crate.
Storage condition: 25 °C nominal, 40 % SOC; do not store below –20 °C.

Electrical ratings are summarised in the table below. Refer to the discharge characteristic on page 2 and the production grading summary on page 3 for the qualified operating window and graded capacity band.

Auriga Energy — Electrical Ratings

Model AUR-PR-340 (prismatic (hard-case), LFP / Graphite)

Parameter	Value	Condition
Nominal voltage	3.22 V	—
Charge voltage (max)	3.65 V	CC-CV, 25 °C
Discharge cut-off (min)	2.50 V	25 °C
Rated capacity	34.0 Ah	0.5C, 25 °C

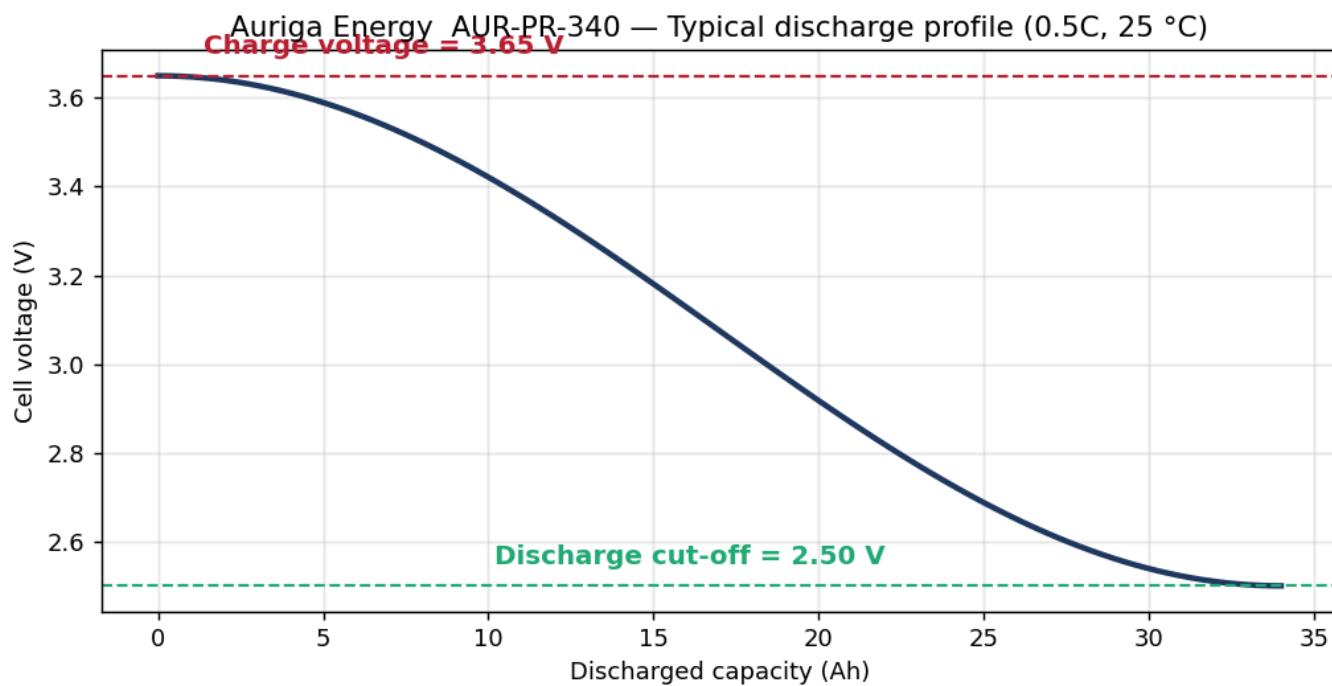


Figure 1. Typical discharge characteristic. The charge and discharge limits shown define the qualification voltage window.

AUR-PR-340 — Production Capacity Grading (lot mean)

Grade	Capacity band (Ah)	Lot share
Grade C	33.40 – 33.81	8 %
Grade B	33.81 – 34.19	26 %
Grade A	34.19 – 34.60	66 %
Lowest graded capacity	33.40	min
Highest graded capacity	34.60	max