

Pollux Power®

Product Datasheet / Safety & Handling Information

Manufactured by: Pollux Power.
Provided as single-pouch cells in anti-static sleeves, 20 per carton.
Keep at 15–25 °C, 30 % SOC. Pouch cells are pressure-sensitive; store flat.

Electrical ratings are summarised in the table below. Refer to the discharge characteristic on page 2 and the production grading summary on page 3 for the qualified operating window and graded capacity band.

Pollux Power — Electrical Ratings

Model PLX-PCH-088 (pouch, NMC622 / Graphite)

Parameter	Value	Condition
Nominal voltage	3.70 V	—
Charge voltage (max)	4.20 V	CC-CV, 25 °C
Discharge cut-off (min)	2.80 V	25 °C
Rated capacity	8.80 Ah	0.5C, 25 °C

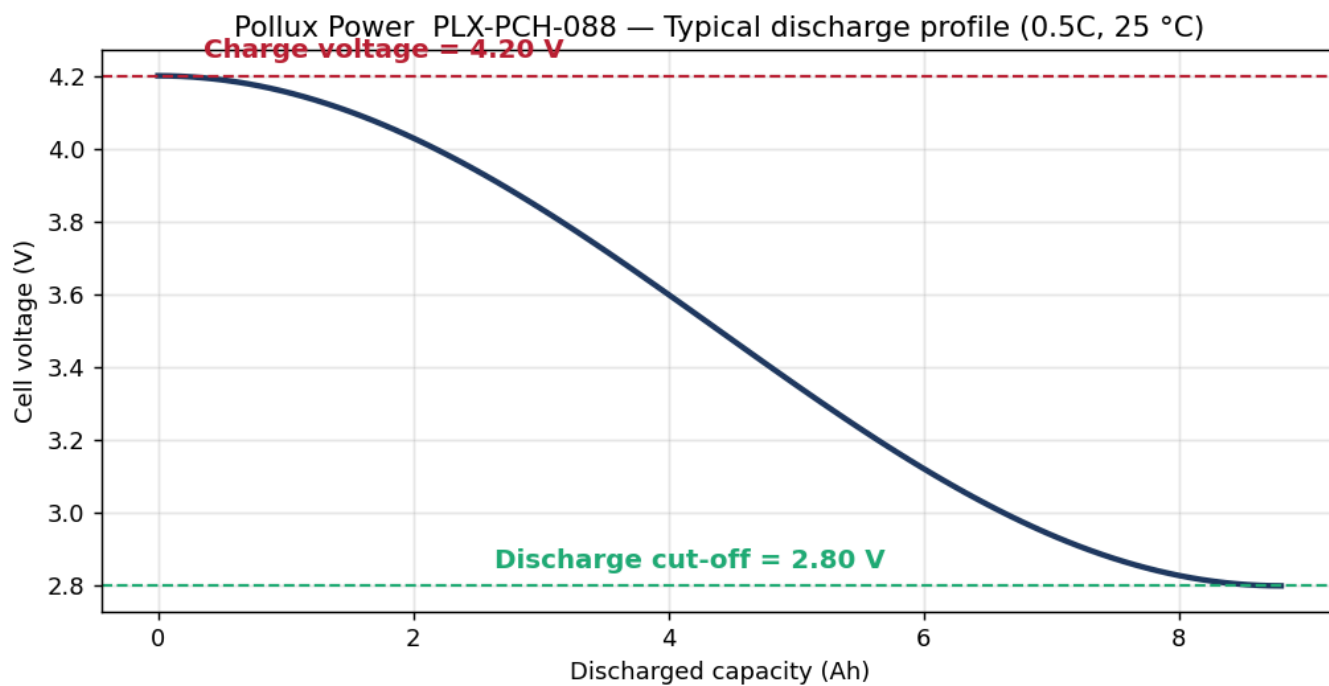


Figure 1. Typical discharge characteristic. The charge and discharge limits shown define the qualification voltage window.

PLX-PCH-088 — Production Capacity Grading (lot mean)

Grade	Capacity band (Ah)	Lot share
Grade C	8.55 – 8.69	8 %
Grade B	8.69 – 8.81	26 %
Grade A	8.81 – 8.95	66 %
Lowest graded capacity	8.55	min
Highest graded capacity	8.95	max