


(a) Detection rate by fault family (grey dashed outline: proposed)

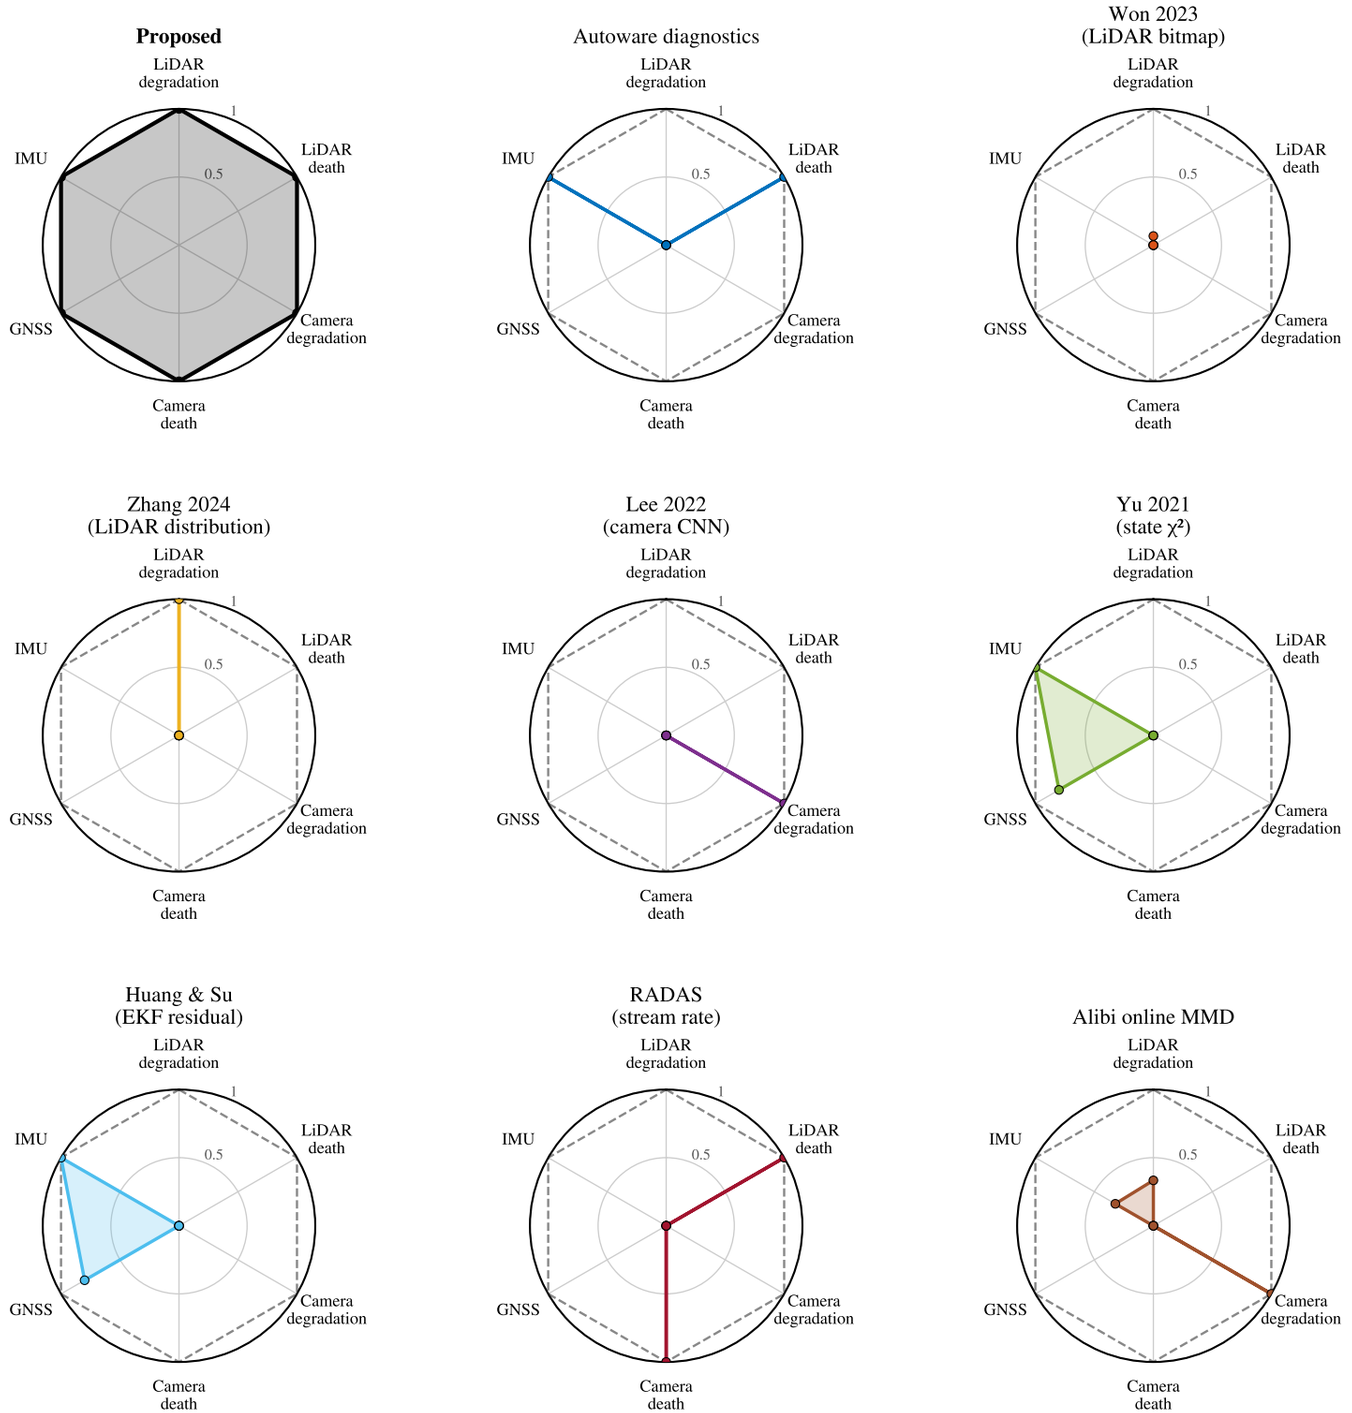

(b) Detection latency (detected cases only)

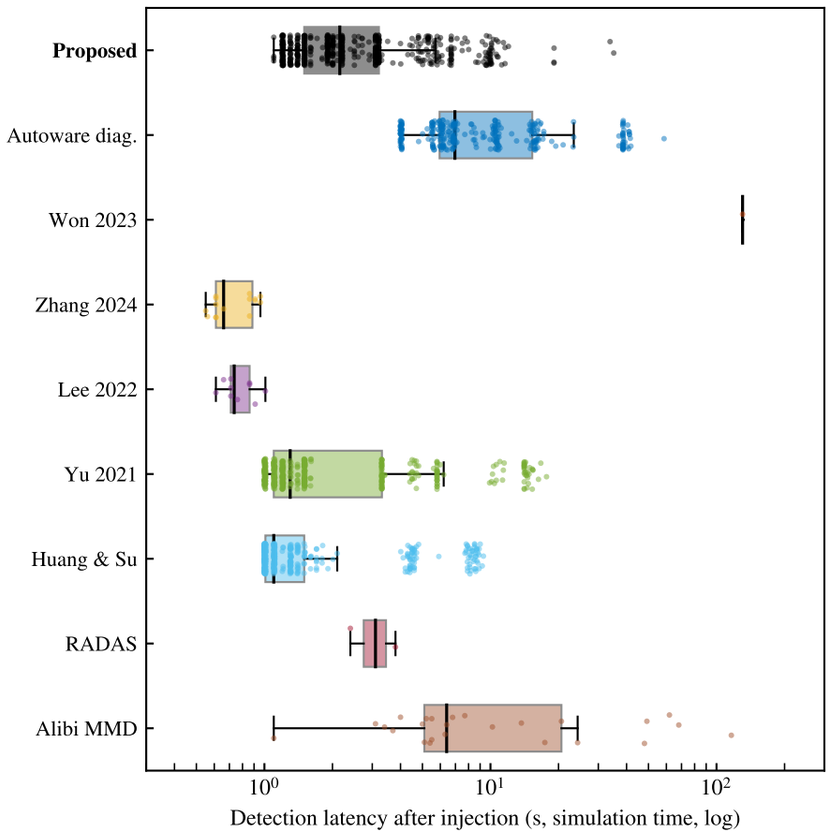

(c) Coverage vs. latency

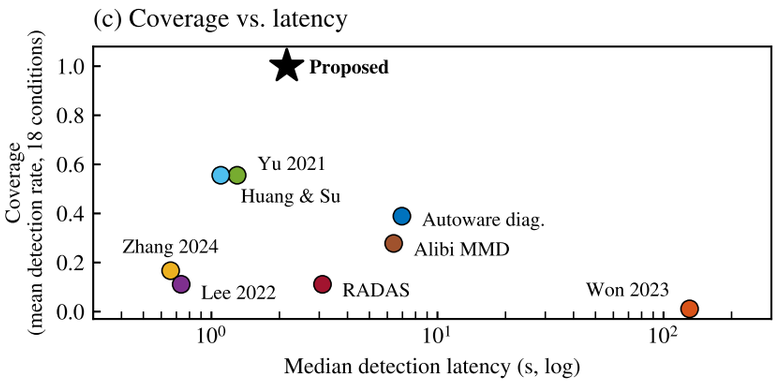

Conditions: 18 capability-reducing faults (LiDAR sparsification mid excluded for all detectors — no capability loss, no intervention by design). A family the detector does not consume counts as 0. False alarms on no-fault runs: 0 for every detector shown. RADAS: 1 run per condition.