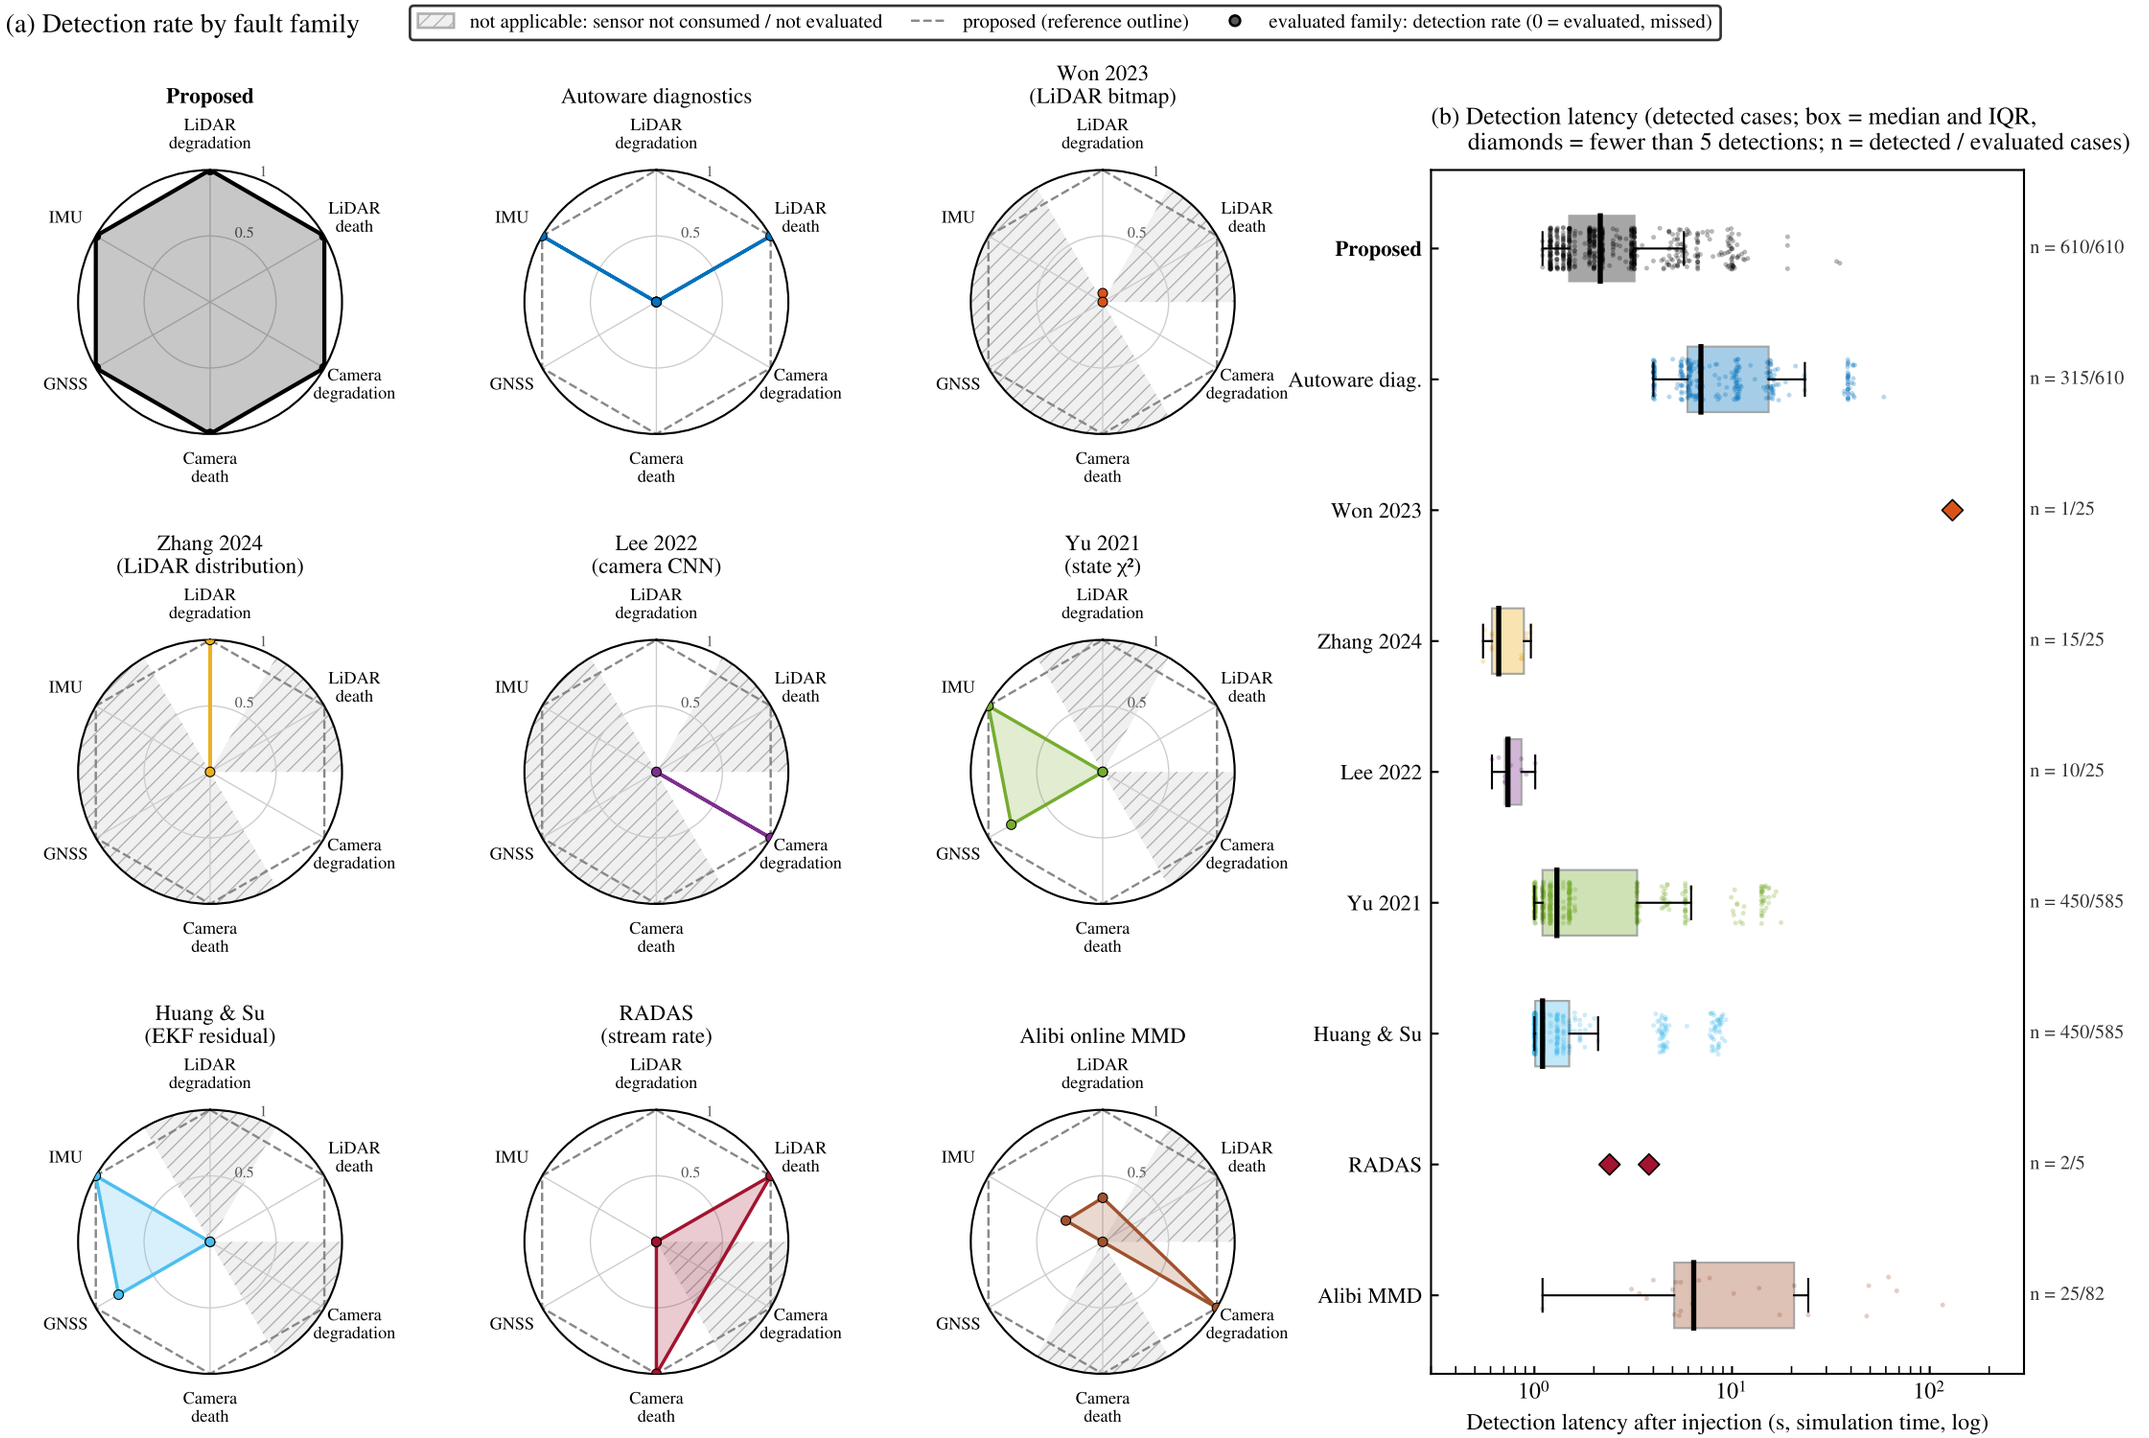


Conditions: 18 capability-reducing faults (LiDAR sparsification mid excluded for all detectors: no capability loss, no intervention by design). Per-condition counts: 19×9 matrix table.
False alarms — navigation evaluation (26 no-fault runs + 597 pre-injection windows): Proposed 1, Autoware diag. 1 (same run), Yu 0, Huang & Su 0. LiDAR/camera evaluation (3 no-fault runs + 30 windows): 0 for all.
Alibi (nf-calibrated threshold): alarms in 3 of 8 no-fault run×sensor evaluations. RADAS: 0 of 5 pre-injection windows.