


← BE SURE TO SELECT YOUR GPIO FROM 10, 12, 18 OR 21!

HELIOS PI HAT SUPPORTS 5V-24VDC.
WILL WORK WITH RGB(W) LEDS FROM 5VDC-24VDC IF LEDS USE 5V LOGIC LEVELS.



STANDARD 5.5MM/2.1MM BARREL JACK
MATCH BARREL JACK VOLTAGE TO RGB LED VOLTAGE (5-24VDC)

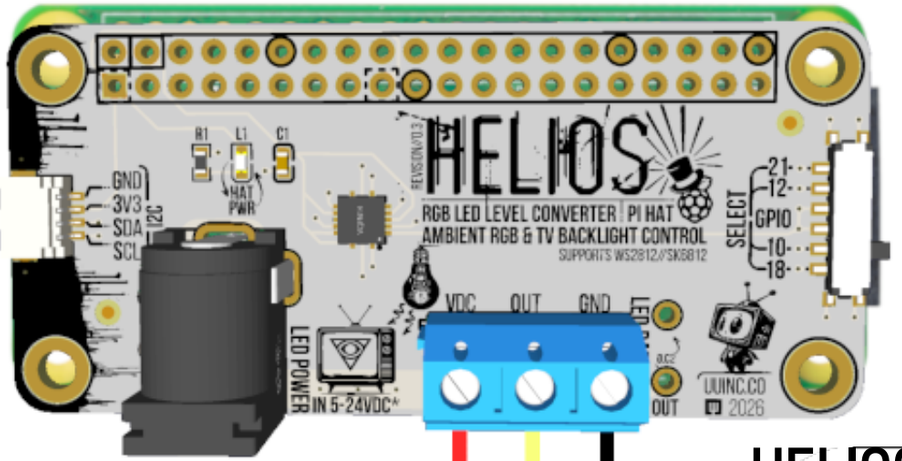