

A

A

B


B

C

C




D

D

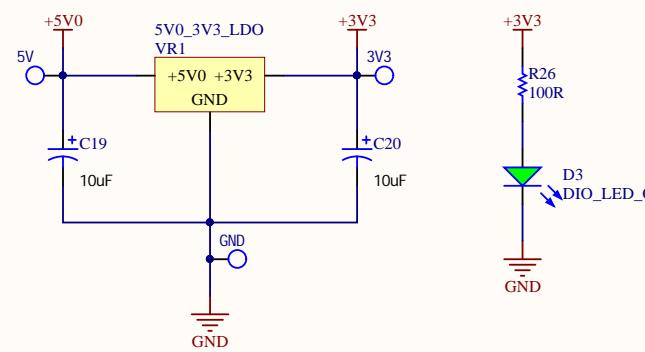


A

SPI Connectors

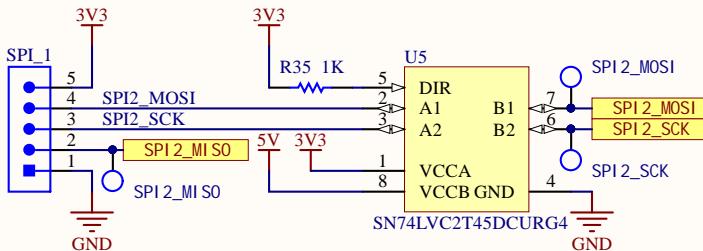
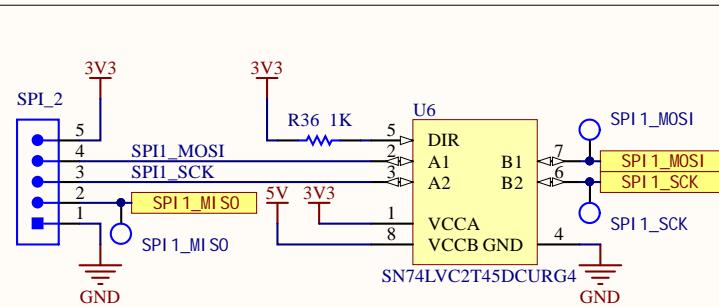


Used level shifter because MCU SPI connectors are 5V tolerant and registers voltages greater than 3V3 as high. Didn't shift MISO because SPI can handle that level of input.

B



C

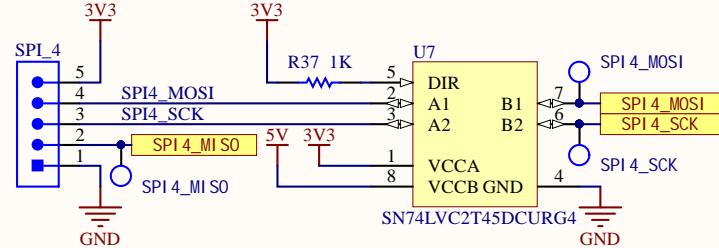

D

A

B

C

D

