

A

A

B

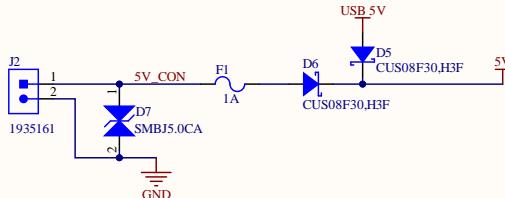
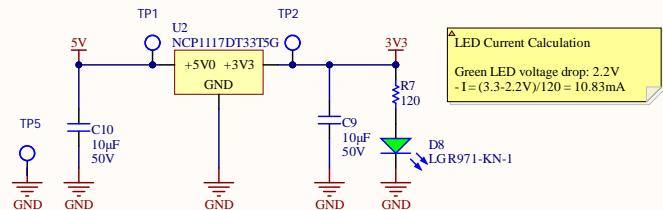
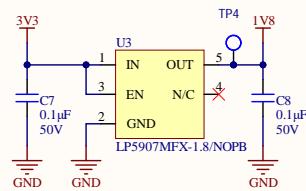
B

C


C

D


D

Power In**5V to 3.3V LDO****3.3V to 1.8V LDO**


Title: Power	
Project: Localization.PrjPcb	
Rev: 1	Checker: Lance Bantoto
Engineer: Cindy Li	
Date: 2020-12-03	Sheet: 1 of 6

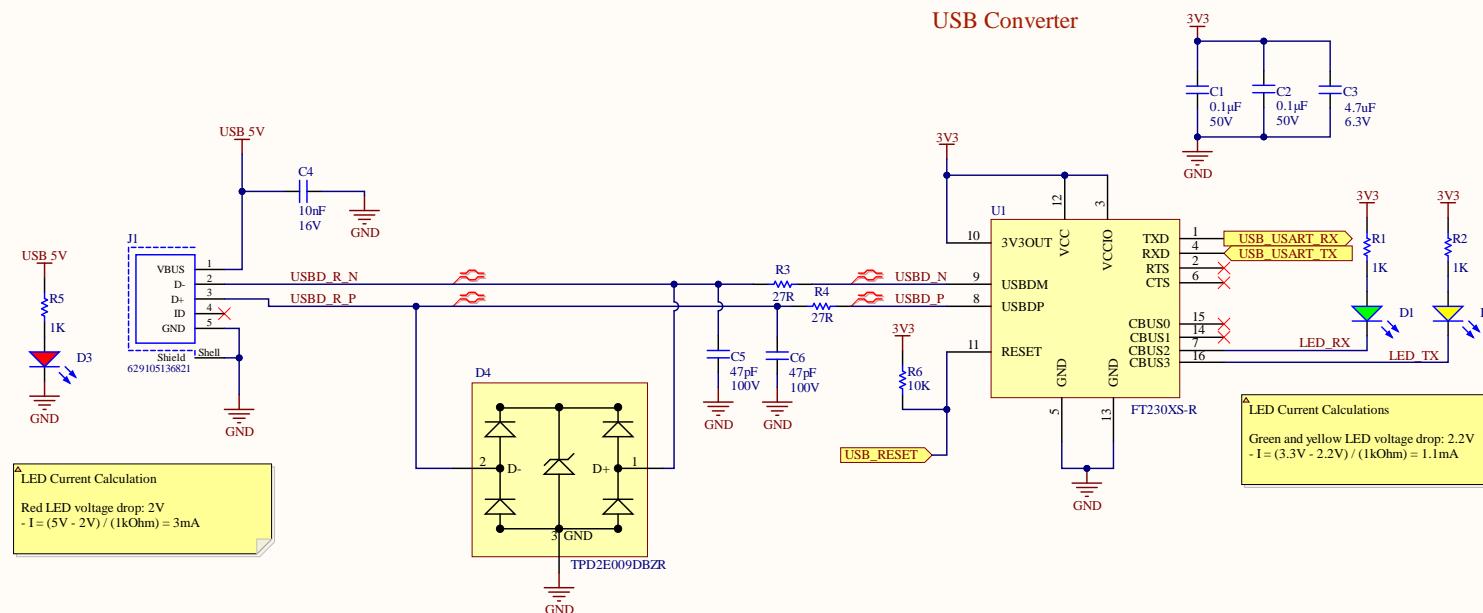

Title: USB	
Project: Localization.PrjPcb	
Rev: 1	Checker: Lance Bantoto
Engineer: Cindy Li	
Date: 2020-12-03	Sheet: 2 of 6

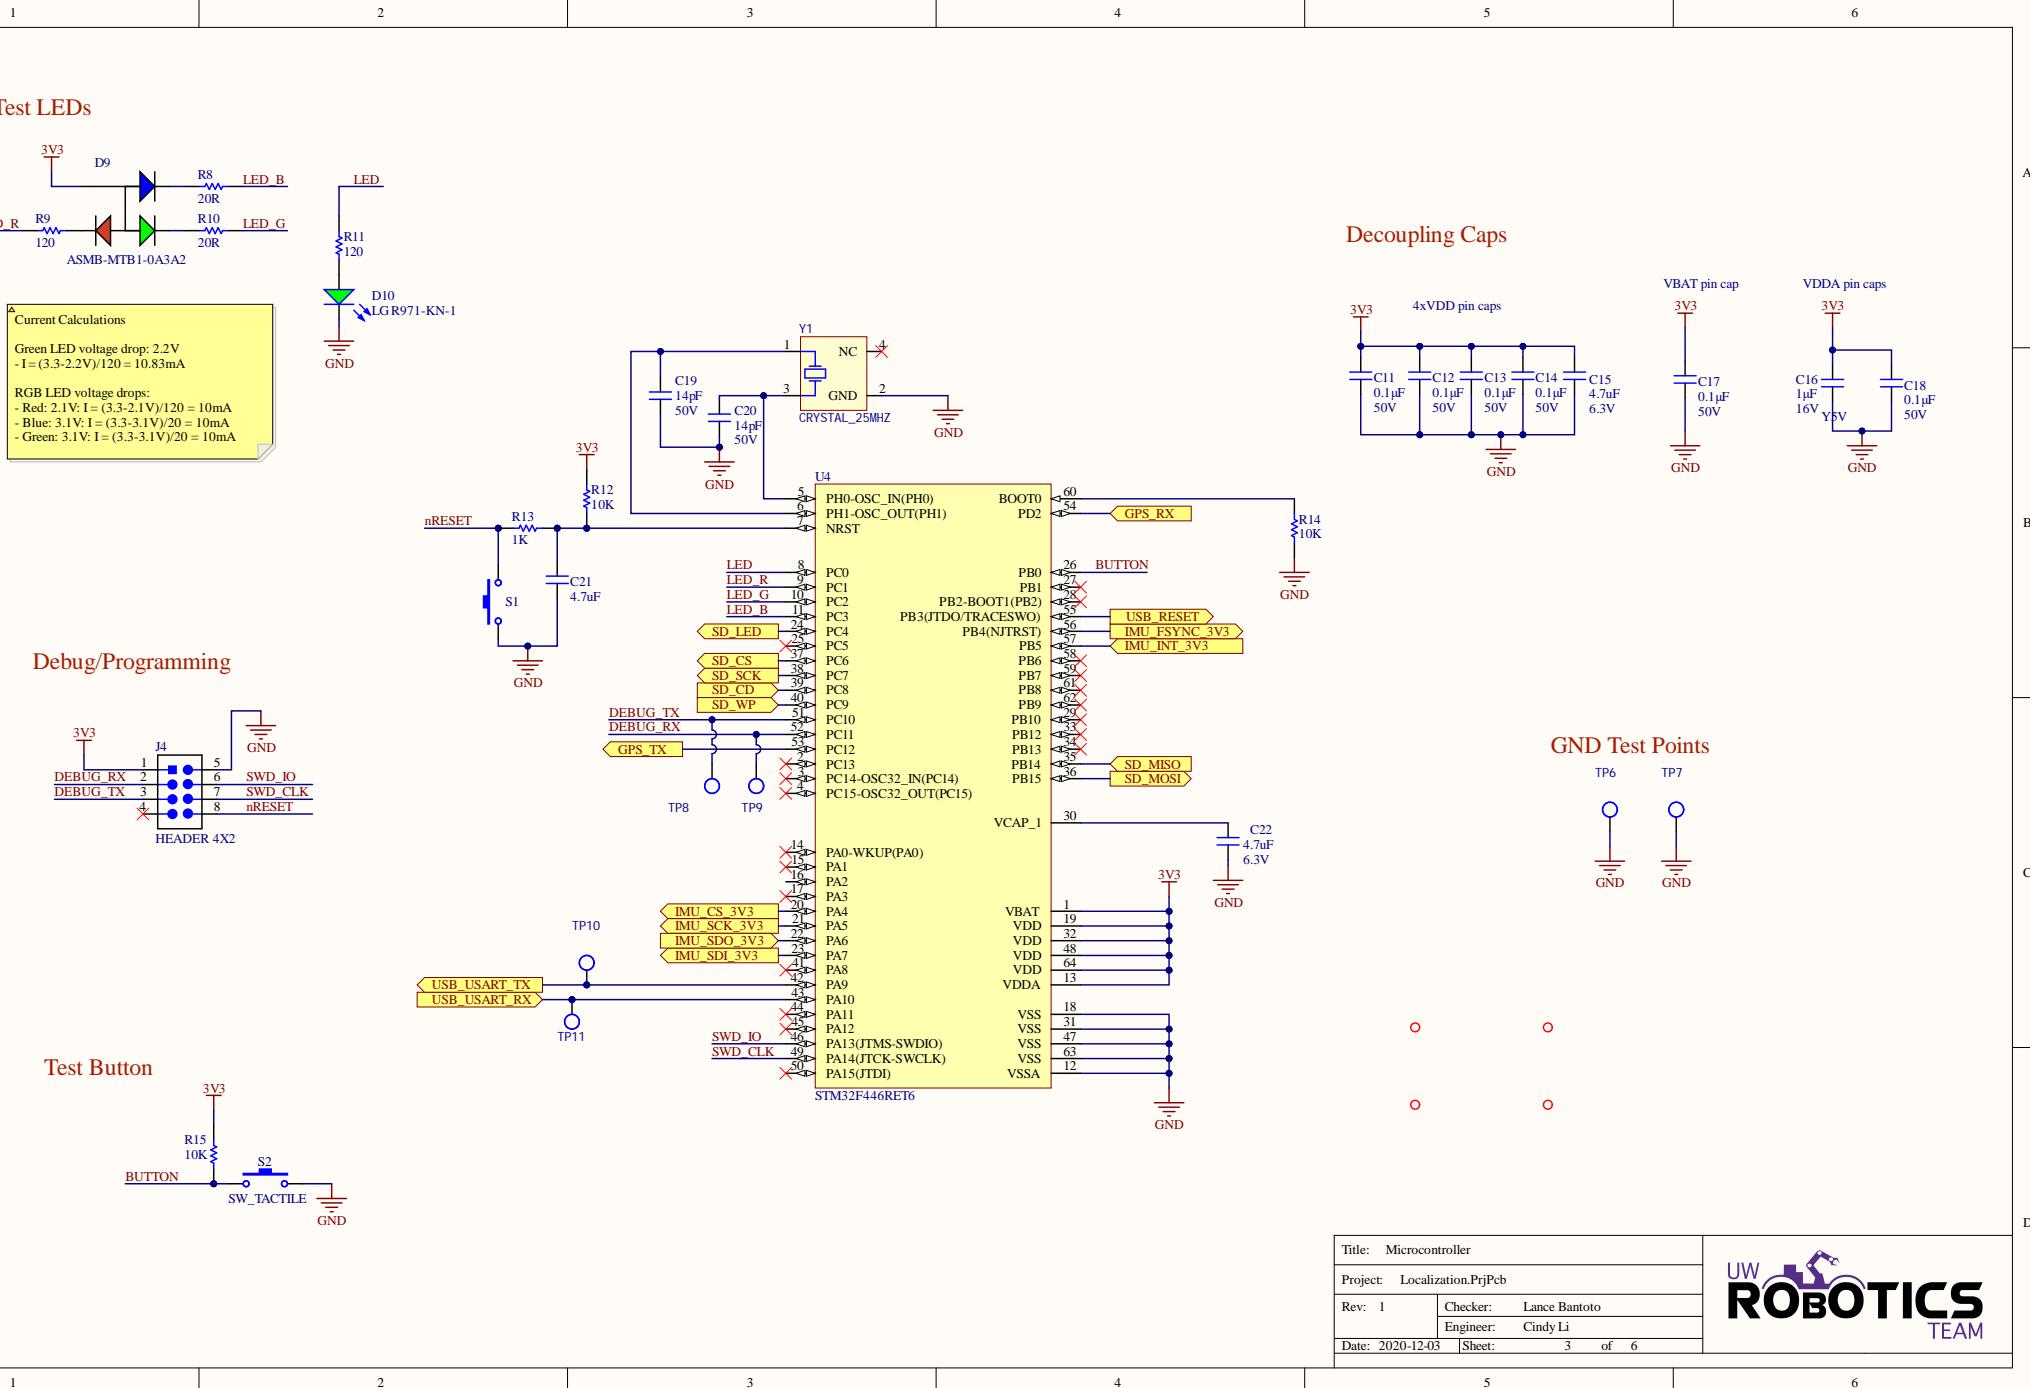



A

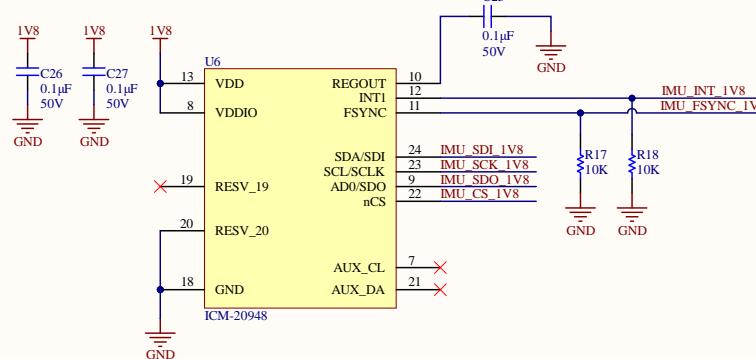IMU Module

B

A

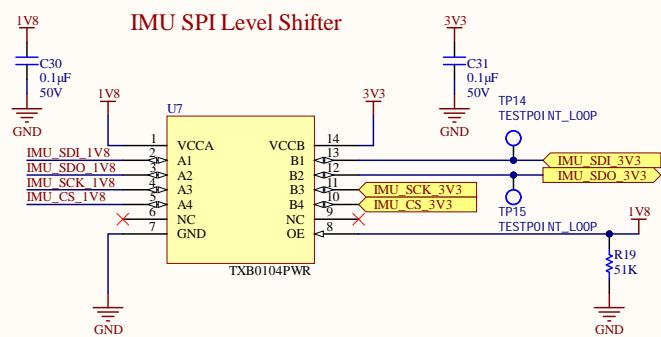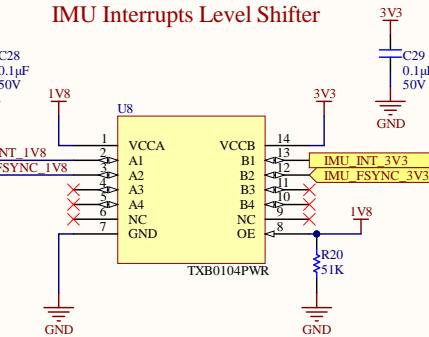B

IMU SPI Level Shifter**IMU Interrupts Level Shifter**

C

C

D

D

Title: IMU	
Project: Localization.PrjPcb	
Rev: 1	Checker: Lance Bantoto
Engineer: Cindy Li	
Date: 2020-12-03	Sheet: 4 of 6



A

A

B

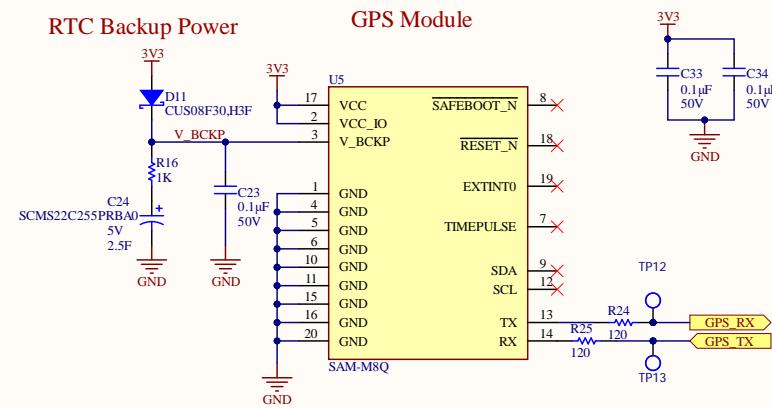
B

C

C

D

D



Supercapacitor Calculations

$V_{cc} = 3.3V$, $V_f = 0.22V$, $V_{min} = 1.4V$, $I_{b kp} = 15\mu A$, $C = 2.5F$
 $t_{b kp} = (2.5F) * (3.3V - 0.22V - 1.4V) / (15\mu A) = 280,000s = 3.241 \text{ days}$
 Capacitor tolerance: -0%, +100%

Title: GPS	
Project: Localization.PrjPcb	
Rev: 1	Checker: Lance Bantoto
Engineer: Cindy Li	Date: 2020-12-03 Sheet: 5 of 6



A

A

B

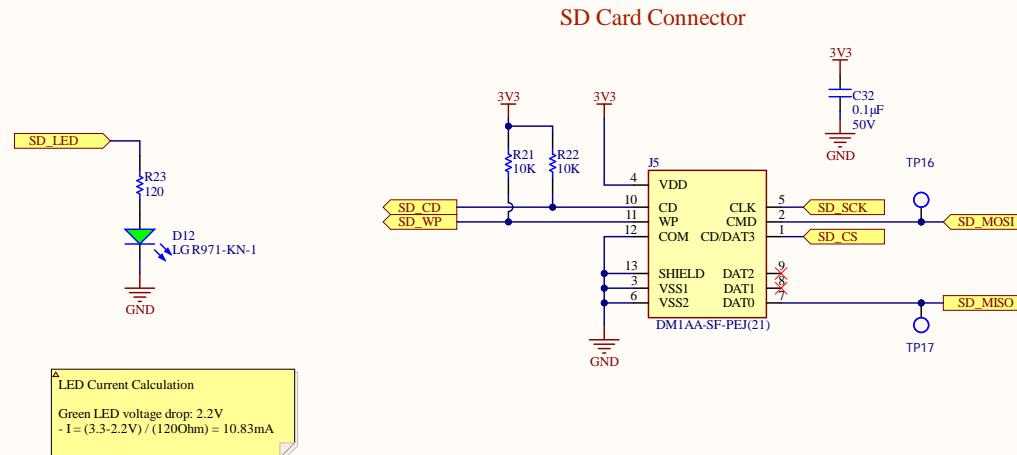
B

C

C

D

D



Title: SD Card	
Project: Localization.PrjPcb	
Rev: 1	Checker: Lance Bantoto
Engineer: Cindy Li	
Date: 2020-12-03	Sheet: 6 of 6

