

Basic Fusion Cart BFC

Assembly Instructions



How can we improve our assembly instructions?
Your comments and suggestions are important to us.
Please e-mail us at: support@versatables.com.



VersaTables.com
14105 Avalon Blvd.
Los Angeles, CA 90061



Lifetime Warranty



Quantity Discounts



Assembled in USA



Fast Shipping

Support:

Local: 310-353-7100
Toll Free: 888-929-0322
Fax: 310-353-7109
Support@VersaTables.com

Hardware & Parts List

Basic Fusion Cart

4mm & 8mm Allen Wrench	20mm Furniture Bolt	1/2 - 13 Jam Nuts	Caster & Caster with Lock
			


Qty:2 Qty:8 Qty:4 Qty:4

Base	Upright Extension	Keyboard Arm	Zip Tie & Curly Tie
			

Qty:1 Qty:1 Qty:1 Qty:5

Keyboard Platform	Monitor Surface 16" by 12"
	

Qty:1 Qty:1

10 -32 Carriage Bolt	1/4 - 20 Phillips Head Bolt	3/8 - 1/6 x 1" Socket Head Bolt	L Panels
			


Qty:4 Qty:8 Qty:4 Qty:2

12 SS Washer	10/32 Thumb Nut	CPU Holder Mount Bracket	Clamp	1" 7/8 Velcro Pads 2 Velcro Loops 2Velcro Hooks
				

Qty:4 Qty:4 Qty:2 Qty:2 Qty:4

Additional Tools Required

Slotted Screw Driver (Optional)	3/4" Wrench
------------------------------------	-------------

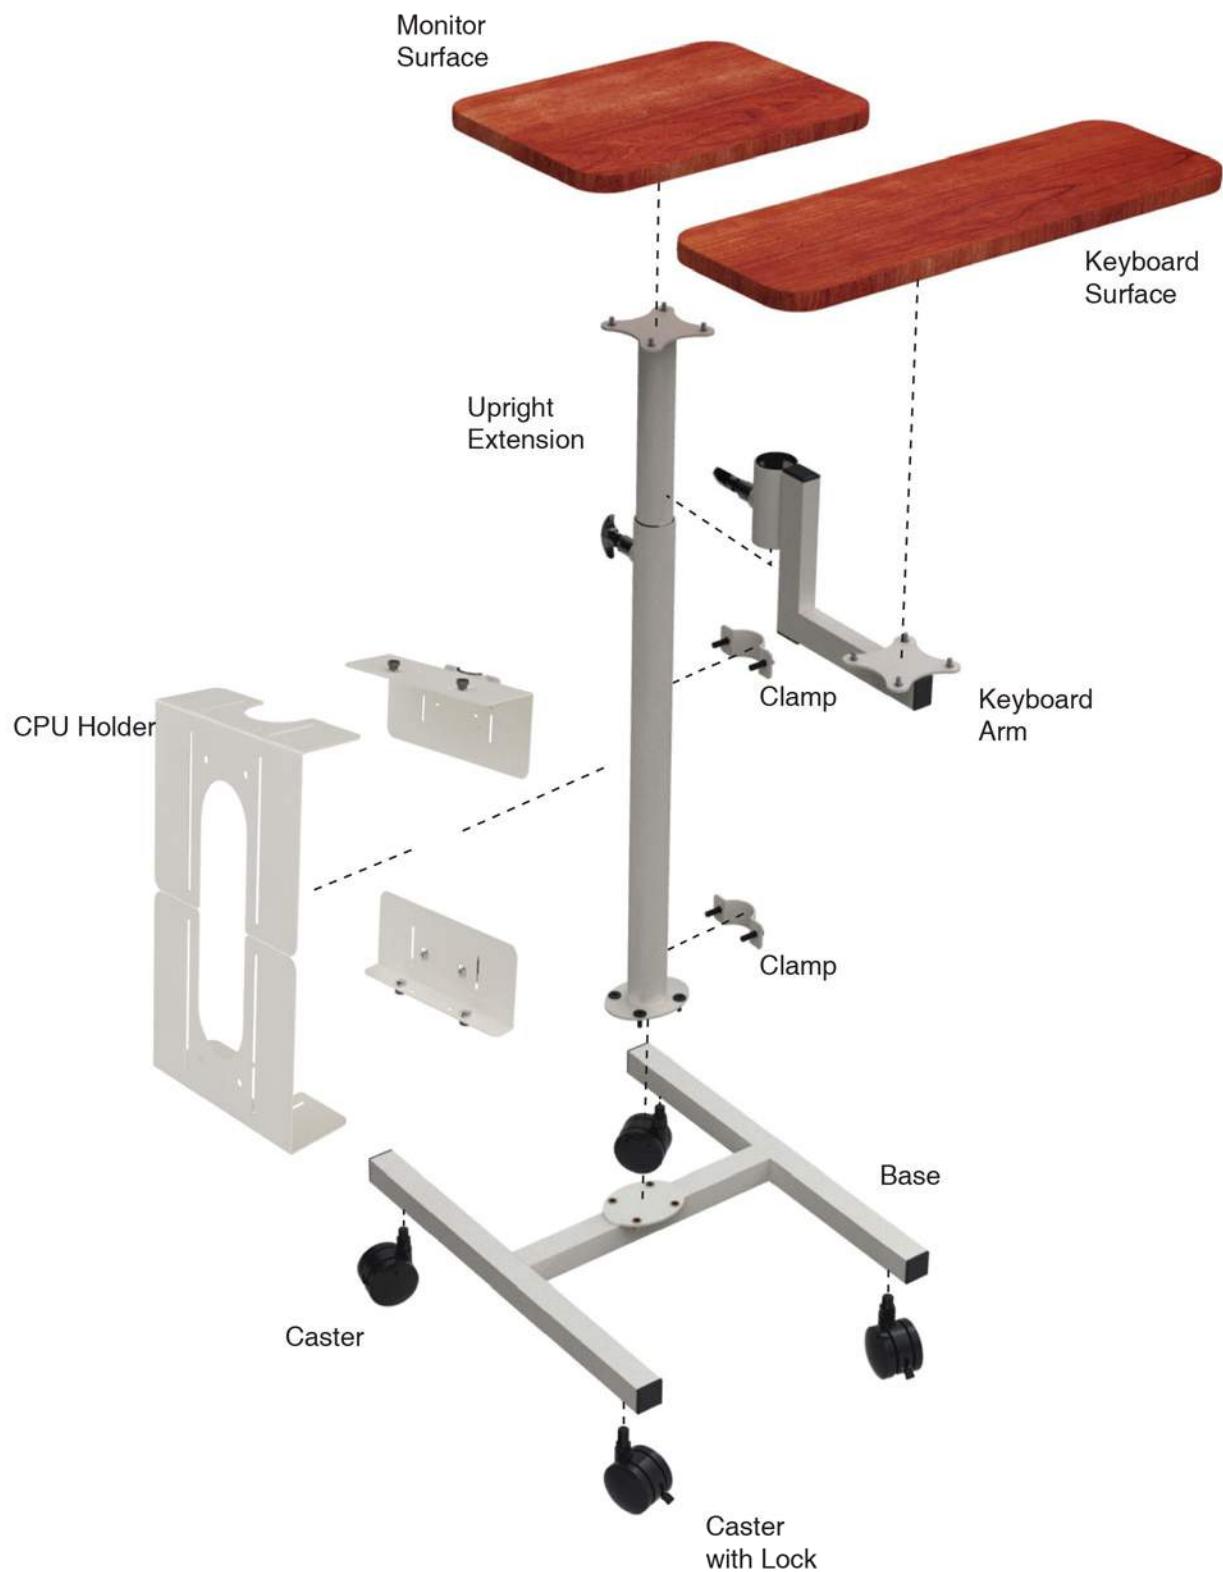

VersaTables.com
14105 Avalon Blvd.
Los Angeles, CA 90061



Lifetime Warranty



Quantity Discounts



Assembled in USA




Fast Shipping

Support:
Local: 310-353-7100
Toll Free: 888-929-0322
Fax: 310-353-7109
Support@VersaTables.com

Step 1



Use the Jam Nut to insure a level and stable base. Tighten with 3/4" Wrench.

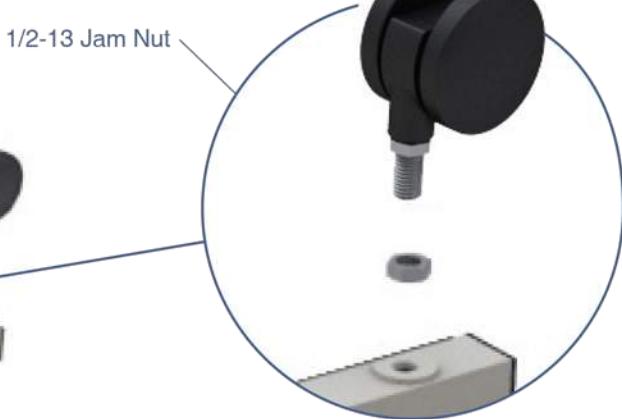

NOTE: The Casters with Locks are installed in the front of the Base.

Step 2



Attach Upright Extension using four 20mm Furniture Bolts. Tighten with 4mm Allen Wrench.

NOTE: Lock Casters to keep cart from moving during the rest of the assembly.



VersaTables.com
14105 Avalon Blvd.
Los Angeles, CA 90061



Lifetime Warranty



Quantity Discounts



Assembled in USA



Fast Shipping

Support:

Local: 310-353-7100
Toll Free: 888-929-0322
Fax: 310-353-7109
Support@VersaTables.com



DCPU Holder Configurations

There are three possible configurations.


NOTE: L pieces are shown in two colors to help you differentiate their placement.




Short Side Setup:
CPU width is 1.3" to 4"



Long Side Setup:
CPU width is 4" to 6"

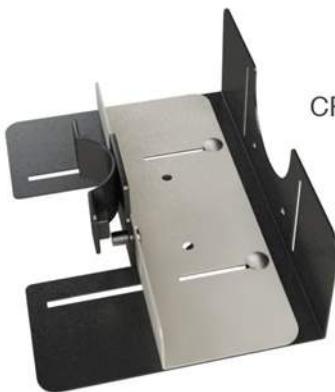

Longest Side Setup:
CPU width is 6" to 11.250"

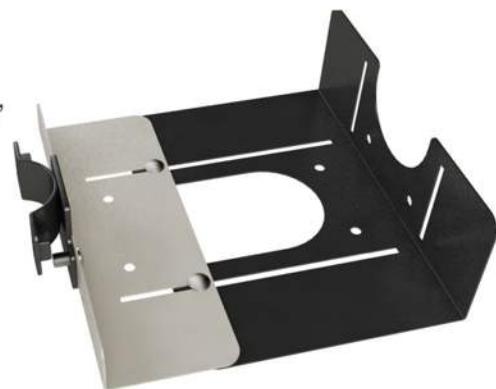

VersaTables.com
14105 Avalon Blvd.
Los Angeles, CA 90061



Lifetime Warranty



Quantity Discounts



Assembled in USA



Fast Shipping

Support:

Local: 310-353-7100
Toll Free: 888-929-0322
Fax: 310-353-7109
Support@VersaTables.com

Step 3


Attach CPU Bracket to the required L Panel.

Use (4) 20mm Furniture Bolts.


20mm Furniture Bolt



Qty:4

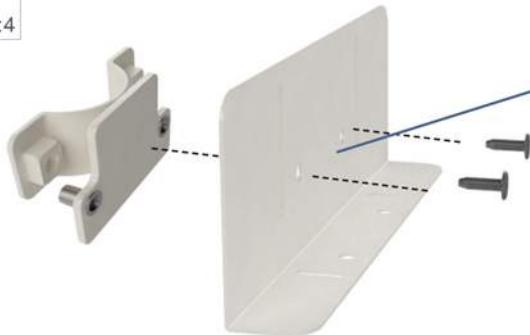

20mm Furniture Bolt

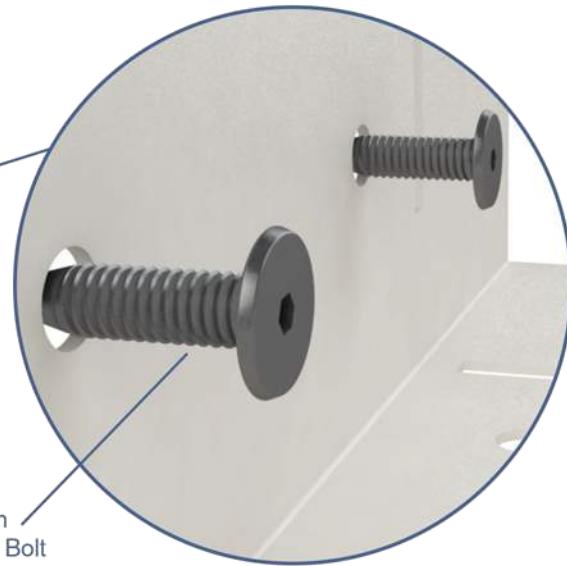

Step 4

Secure Second L Panel.

Use (4) 10-32 x 3/8 Carriage Bolts, (4) 10/32 Thumb Nuts and (4) 12 SS Washers.

10/32 x 3/8 Carriage Bolt



Qty:4

10/32 Thumb Nut




Qty:4

12 SS Washer



Qty:4

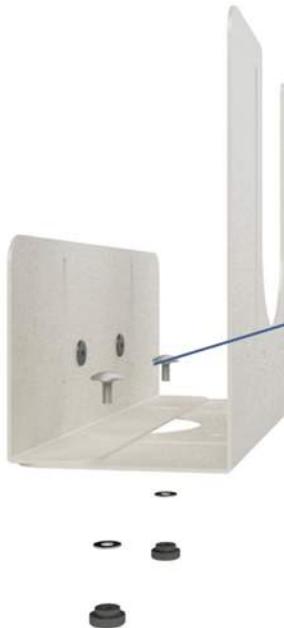


10/32 x 3/8 Carriage Bolt

10/32 Thumb Nut

10/32 Thumb Nut

10/32 Thumb Nut

10/32 Thumb Nut

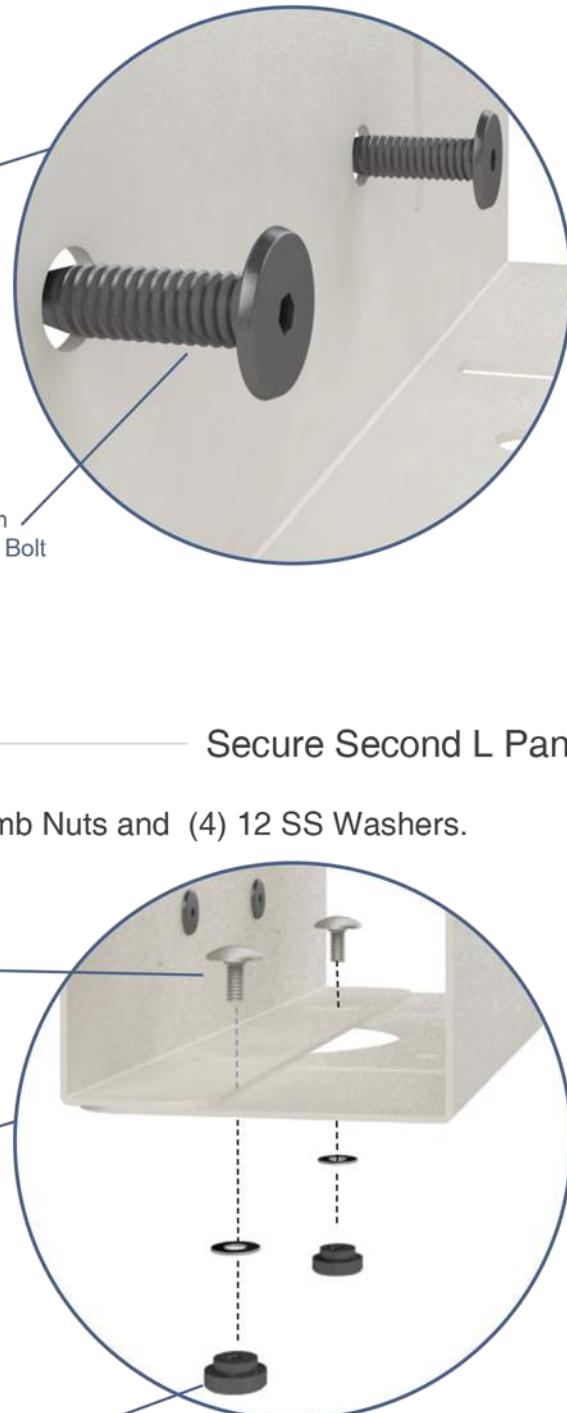

Step 5


Attach CPU Holder At the desired Height.

Use (4) Clamps and (4) 3/8 1/6 x 1" Socket Head Bolts.



Clamp


Qty:4



3/8 1/6 x 1"

Socket Head Bolt

Qty:4

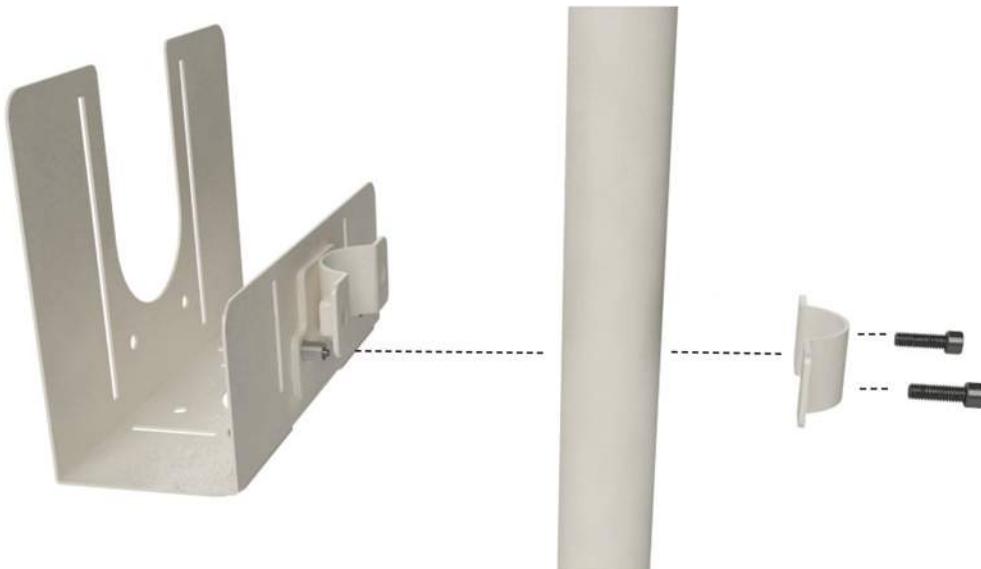

Step 6

Attach Velcro Pads to both your CPU and CPU Holder.



Velcro Pads

Qty:4



Velcro



Velcro



Velcro Pads

Step

7

- Remove the top of the Upright Extension and slide the Keyboard Arm onto it.




Step

8

- Use the 1/4-20 Phillips Head Bolts to attach the Keyboard and Monitor Surface

1/4-20 Phillips Head Bolt
Qty:8

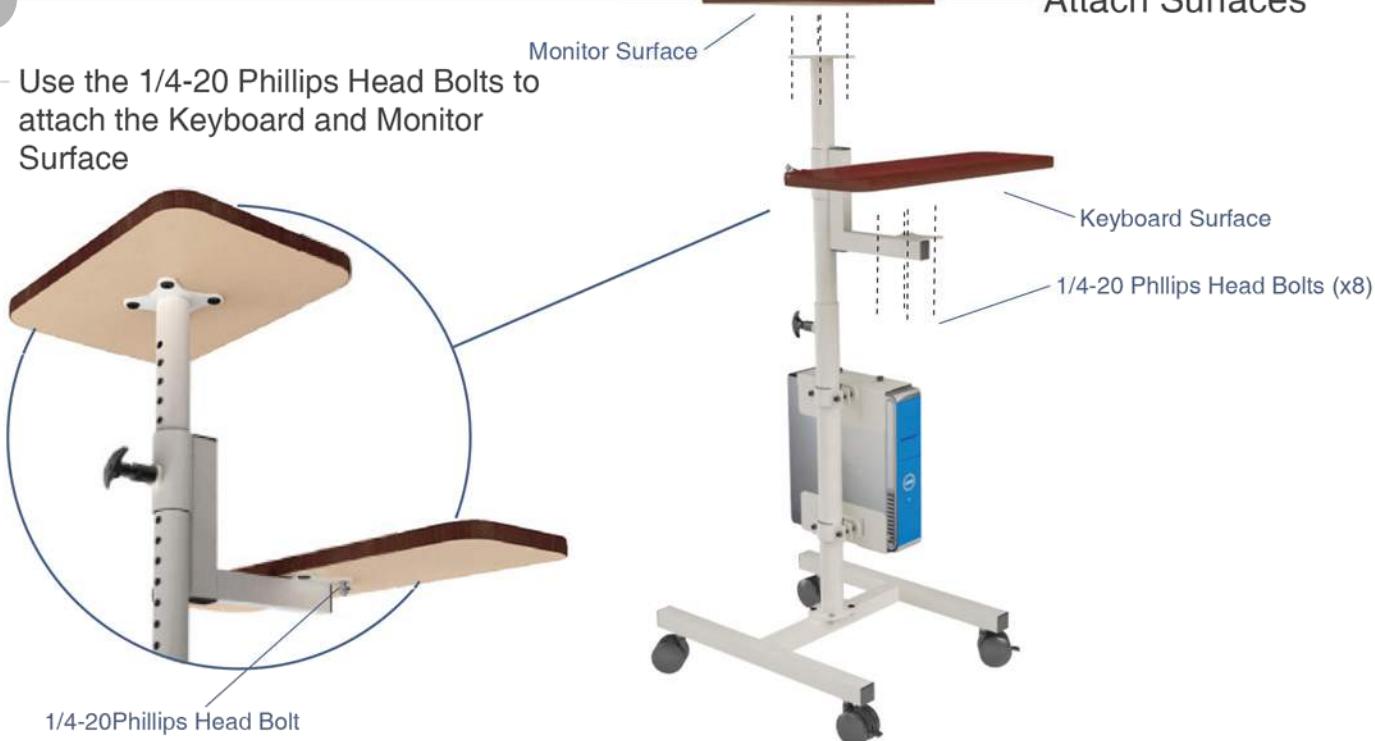

VersaTables.com
14105 Avalon Blvd.
Los Angeles, CA 90061



Lifetime Warranty



Quantity Discounts



Assembled in USA




Fast Shipping

Support:

Local: 310-353-7100
Toll Free: 888-929-0322
Fax: 310-353-7109
Support@VersaTables.com

Step 9

After assembly is complete, make sure to screw down both Pull Pins. This will keep the cart stable and secure.

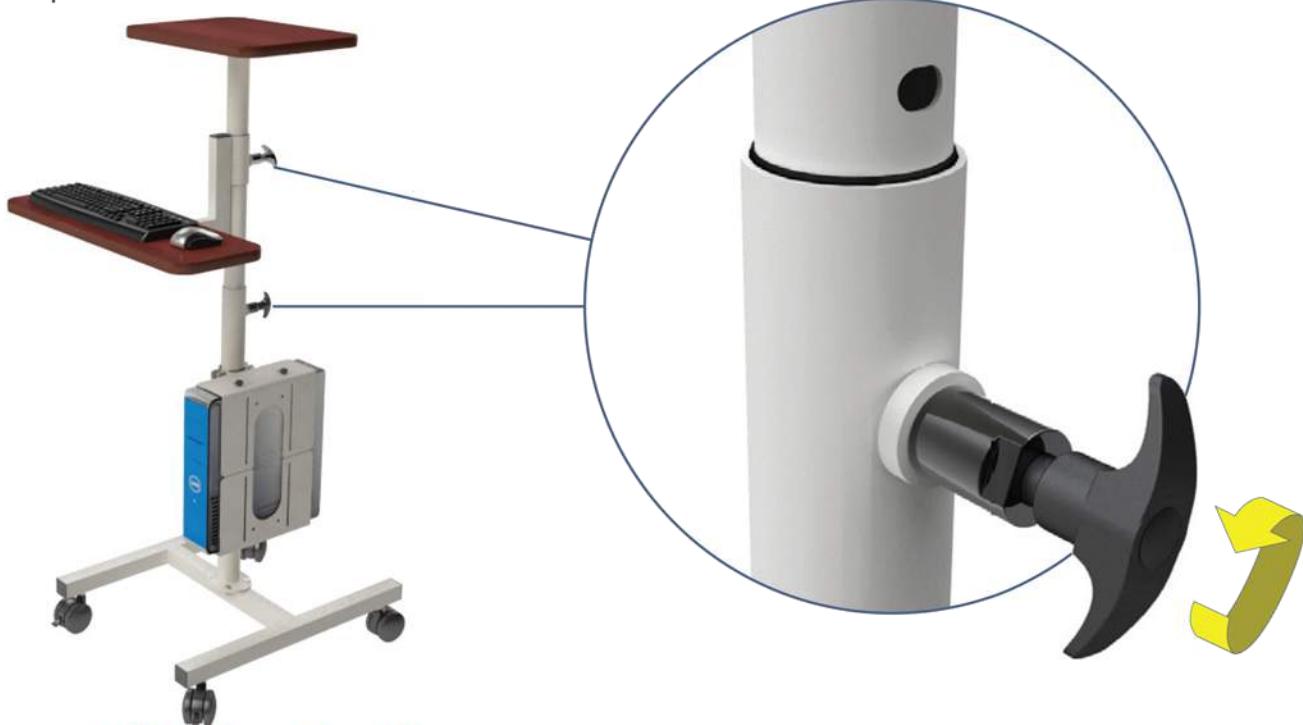

NOTE: Steps 9 and 10 are OPTIONAL. The Utility / Printer Platform is an ADDITIONAL ACCESSORY and is acquired separately from the cart.


Step 10

Utility / Printer Platform

Attach the Utility / Printer Platform to Utility Bracket using (4) 1/4-20 Phillips Head Bolts.

1/4-20 Phillips Head Bolt

Qty: 4

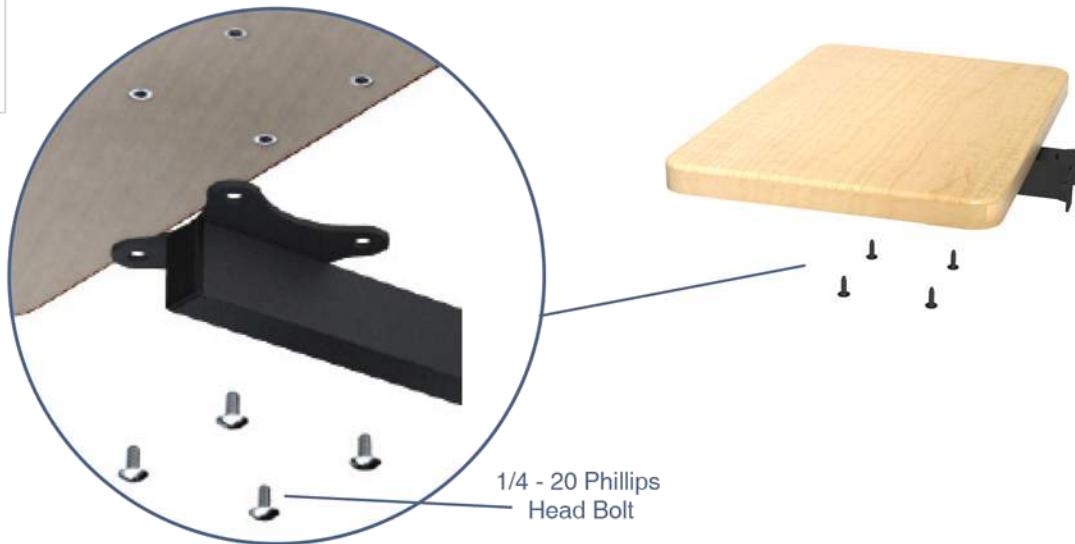

1/4 - 20 Phillips Head Bolt

Step 11


Utility / Printer Bracket

Attach the Utility / Printer Bracket to Cart at the desired height using (1) Clamp Bracket and (2) 3/8-16 x 1" Socket Head Bolts.

3/8 -16 x 1"
Socket Head Bolt



Qty:4

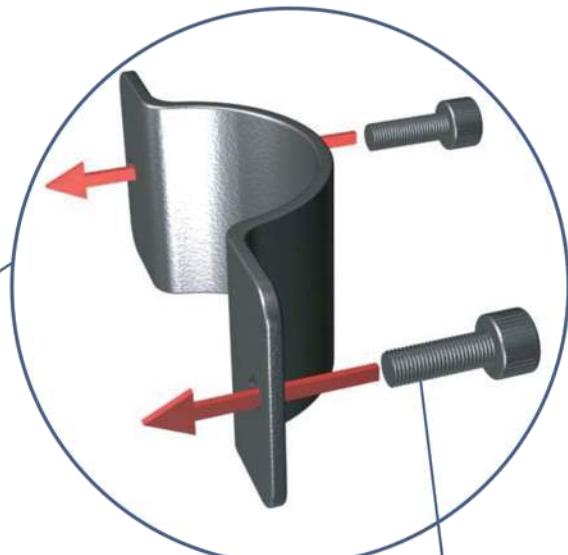

3/8 -16 x 1" Socket
Head Bolt

How can we improve our assembly instructions?
Your comments and suggestions are important to us.
Please e-mail us at: support@versatables.com.