# A Project Report

on

## Title of project

by

- 1. abc
- 2. pqr
- 3. xyz

under the guidance of

Name of the Guide



Department of Computer Engineering

University of Mumbai

April - 2020

Juhu-Versova Link Road Versova, Andheri(W), Mumbai-53.

# Certificate

### Department of Computer Engineering

This is to certify that

- 1. ABC(name of the student)
- 2. PQR(name of the student)
- 3. XYZ(name of the student)

Have satisfactory completed this project entitled

(Title of the project)

Towards the partial fulfillment of the BACHELOR OF ENGINEERING IN (COMPUTER ENGINEERING) as laid by University of Mumbai.

Guide Head of Department

Prof. Name Dr.Satish Y. Ket

Principal
Dr.Sanjay Bokade

# Project Report Approval for B. E.

This project report entitled (Title) by (Author Names(abc,pqr,xyz)	))	is a	ap-
proved for the degree of Computer Engineering.			

	Examiners
	1. ———
	2. ———
Date:	
Place:	

### **Declaration**

We wish to state that the work embodied in this project titled "Title of Project" forms our own contribution to the work carried out under the guidance of "Guide Name" at the Rajiv Gandhi Institute of Technology.

We declare that this written submission represents our ideas in our own words and where others' ideas or words have been included, we have adequately cited and referenced the original sources. we also declare that we have adhered to all principles of academic honesty and integrity and have not misrepresented or fabricated or falsified any idea/data/fact/source in our submission. we understand that any violation of the above will be cause for disciplinary action by the Institute and can also evoke penal action from the sources which have thus not been properly cited or from whom proper permission has not been taken when needed.

(Students Signatures)
Name of Student (Roll No)
Name of Student (Roll No)

Name of Student (Roll No)

### Abstract

The 500 word abstract shall highlight the important features of the thesis/dissertation/project report and shall correspond to the electronic version to be submitted to the Library for inclusion in the website. The Abstract in the thesis, however, shall have two more parts, namely, the layout of the thesis giving a brief chapterwise description of the work and the key words.

# Contents

Lis	t of Figures	ii
Lis	t of Tables	iii
Lis	t of Algorithms	$\mathbf{v}$
Lis	t of Acronyms	vi
Lis	t of Symbols	vii
1	Introduction  1.1 Introduction Description	
2	Literature Review  2.1 Survey Existing system	. 4 . 4 . 4
3	Proposed System  3.1 Analysis/Framework/Algorithm  3.2 Details of Hardware and Software  3.2.1 Software Requirements  3.2.2 Hardware Requirements  3.3.1 Detailed Design	. 6 . 6 . 6 . 7 . 8
	3.4 Methodology/Procedures(your approach to solve the problem)	
4	Results & Discussions 4.1 Implemented Algorithm's Psudo-code	. 11
5	Conclusion	13
Aı	pendix	14

References	<b>15</b>
Publications by Students	17
Annexure	18

# List of Figures

2.1	CISCO-High level BYOD Solution Architecture	١
	The Proposed System/System Architecture	
	use case	
4.1	Basic Result snapshot	11

# List of Tables

3.1	Your first table	9
3.2	Nonlinear Model Results	9

# List of Algorithms

This page contains list of algorithms

# List of Acronyms

This page contains list of acronyms

# List of Symbols

This page contains list of symbols

# Chapter 1

# Introduction

### 1.1 Introduction Description

The BYOD is a solution designed to specifically address the mobile enterprise needs. the system includes of key aspect called Mobile Device Management (MDM). It also supports single sign-on (SSO) and multi-tenancy.

The server enables company/institutes or organizations to manage, secure and monitor Android devices .

The administrator can create policies in on server and define the device management rules, applications which are blacklisted and application which are allowed and need to install on android device after perticuler policy get enforced. When employees register their devices with server, the applicable policy rules (e.g., enabling the phone lock, disabling the camera, and more) will be enforced on their devices. Every moment MDM server monitor the device and accordingly can select follow-up actions like sending the user a warning message, enforce the policy again, and more) based on their security requirements.

The mobile management system consists of three key consoles: Console, Publisher and Store. Users uses the Publisher to manage enterprise apps throughout their application life cycle, which includes application states such as, published, unpublished, approved, rejected, deprecated, and retired. The Store acts as a marketplace and contains all the corporate mobile apps, which users can search, view, rate and install on-demand. The administrator uses the Console to manage users, administerand monitor policies.

### 1.2 Organization of Report

Describe every chapter (what every chapter contains)

- Ch.1 Introduction: A user friendly android interface on which BYOD scenario can be implement.i.e. access services through this interface.
- Ch.2 Review of Literature: Configuring and plug-ins for MDM servers which handle mobile devices, like managing services and access control.
- Ch.3 Proposed System: Preventing use of the organizations information on a device with applications not formerly approved i.e restrict downloading of third party software.

- Ch.4 Results & Discussions: Encrypting the organizations data stored on a device to stop unauthorized applications and users from accessing it.
- Ch.5 Conclusion: Device locking is safeguarding of devices.

# Chapter 2

## Literature Review

Research has been done to provide security framework for BYOD paradigm for employees and organisation.BYOD security framework proposed and prototyped using Mobile Device Management (MDM) but still industries not satisfied with security policies (due to inside and outside threat). Because of this reason ,BYOD security still in research.

### 2.1 Survey Existing system

A security framework for mobile devices that ensures that only applications that comply with the organization security policy are installed on the registered devices in which the framework consists of 1) a security policy manager that mediates access to the applications stores by (i) keeping track of the security state of the registered devices and (ii) determining whether an application can be safely added to a device and 2) An installer application that tells the user which applications can be safely installed, which need further scrutiny by the security policy manager and finally which are known to violate the security policy [1, 4], paper author present a type and effect system which allows us to infer history expressions from application implementations.

presented analysis report on impact on fast growing trend in mobile market where analysis report contains consumerisation (personal devices are used for work as well as leisure) benefits for the Enterprise, Consumerization concerns, auther explained about consumerisation trends, spread if BYOD, consumerisation benefits for the enterprise (BYOD appeals to the enterprise finance managers, where users pay for their own devices and the internal application farm is replaced by free web services), consumerization concerns (Small and light portable devices can be lost or stolen easily, and with them - confidential corporate data and access to enterprise facilities) [2].

Paper cited above cover two models which can be used to manage the mobile devices in an organization to bring in BYOD [3],i.e Mobile Device Management(MDM) and Cloud Architecture for Mobile Devices where the mobile device management tool helps the organization to fully control the devices which are generally supported by API's of smartphones used and the MDM tool helps on the security and management of device by monitoring, controlling and protecting the device. MDM architecture and BYOD concept control objectives a) Identification and access control b) Data protection c) Application security d) Integrity control e) compliance

The paper selects major domestic and external web sites which provide cloud, VoIP, messenger, E-mail services and examines whether data are encrypted or not for constructing

a safe Smart Work infrastructure, in which auther had explained about SSL/TLS (Definction of SSL/TLS ,SSL/TLS Handshacking) which is the basis judgement of encryption of data, also auther explained about countermeasures for vulnerability, SSL modes [6].

BYOD security concerns and potential threats [7,10] are define and targeted in different environment of access control and people in center, generally worked on data exfiltration, data tampering and data unavailability.

Formally define a subset of the existing se- curity framework of Android, which suffices to define proposed extensions rigorously, also described the extensions to the existing mechanism for incorporating usage constraints, and created a policy enforcement framework that incorporates usage policies while granting permissions to applications for accessing resources; and described and implemented an extended package installer that utilizes an easy-to-use and intuitive interface for allowing users to specify their constraints [11].

### 2.2 Limitation Existing system or research gap

(List them with bullet points) The Cisco BYOD solution builds on the Cisco Border less Network architecture and assumes best practices are followed in network infrastructure designs for campus, branch offices, Internet edge, and home office implementations. This comprehensive BYOD solution provided for wired, Wi-Fi, remote, and mobile access to the network, supporting across many device types and brands, and capable of enforcing the various policies across the spectrum of businesses and industries. In addition, as devices move from one context to another, for example from the corporate WiFi network to a public 3G/4G mobile network, the BYOD solution provide secure access while keeping the experience seamless for the user.

### 2.3 Problem Statement and objectives

System is fully configured with network devices which nearly non affordable for small scale organization, where they always search for open source solution. Figure 2.1 describe high level architecture.

### 2.3.1 Objectives

List objectives using bullet points

### 2.4 Scope

In addition, as devices move from one context to another, for example from the corporate WiFi network to a public 3G/4G mobile network, the BYOD solution provide secure access while keeping the experience seamless for the user.

example how to add image/figure

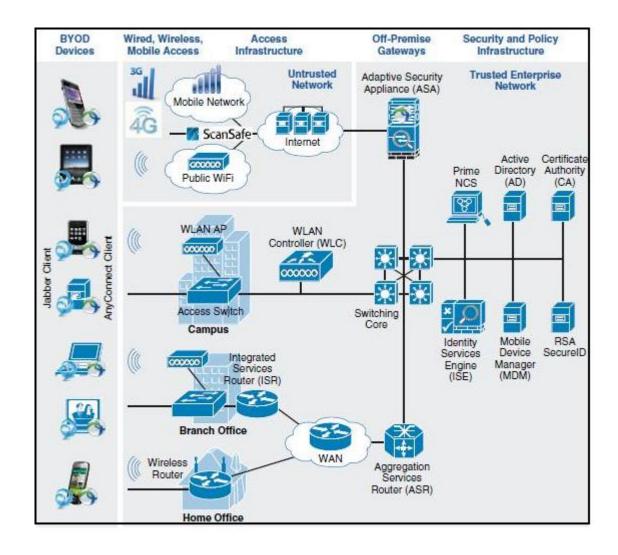


Figure 2.1: CISCO-High level BYOD Solution Architecture

# Chapter 3

# **Proposed System**

The proposed System has the main component as securing BYOD devices i.e. MDM server which handle android based smart phones so those mobiles will be used inside the organization efficiently and securely. Since the system is used for the purpose of giving internet privileges to employees' devices, only basic operations from the MDM server side can be performed (like device lock, passcode policy, etc.). The system allows the user to enroll to the MDM server from both within the network (company WiFi) and also outside (using Cellular). When the user enrolls his/her device to the system via the private network, the device is given a session that can be used to access the internet.

### 3.1 Analysis/Framework/Algorithm

Adroid devices (smartphone, tablet) are preferable with os android version 4.0 onwards. The basic requirement for device is ,that device should not be rooted. That is downloading from other servers should be enable. From android device interface user connects to MDM server through openn ssl connection by exchanging certificate which embbeded with android user file.

### 3.2 Details of Hardware and Software

### 3.2.1 Software Requirements

- OS
- Framework
- Server
- Database

### 3.2.2 Hardware Requirements

- Processor
- RAM

- ROM
- GPU

### 3.3 Design Details

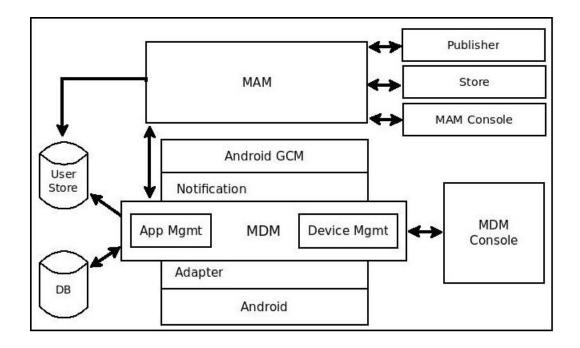


Figure 3.1: The Proposed System/System Architecture

- When the device connects to the private network, it checks with the router if it has a session. If so, then the device already has internet access in this network, else it will be redirected to the EMM server.
- The MDM server will check if the device is enrolled in the server.
  - 1. If the device is already registered in the system, then it will direct the user to the WiFi Login page where the user would have to enter the LDAP credentials to get a new session.
  - 2. If not, it will be directed to the appropriate EMM page. In the case of Android, it will be directed to the MDM Agent download page whereas for iOS, it will be directed to the EMM registration page.
- Upon successfully enrolling the device to the EMM server, the server will automatically create a new session for the device.

the system uses local massaging and Google Cloud Messaging(GCM). Carbon server API from WSO2 uses massaging service to send massgaes to user email id. Detail procedure about GCM is discuss in results.

### 3.3.1 Detailed Design

In this section you need to put diagram/figures related to detailed design like UML diagrams. Also give small description about every diagram. (Must take suggestion from guide)

### **UML Software Design**

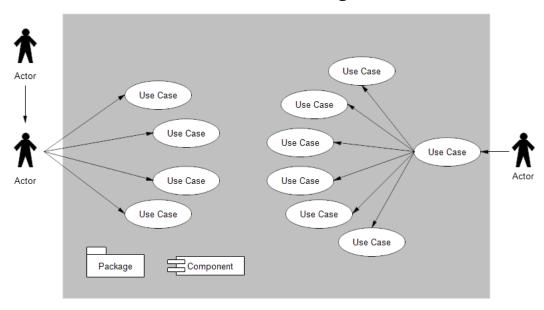


Figure 3.2: use case

Small description about above diagram.

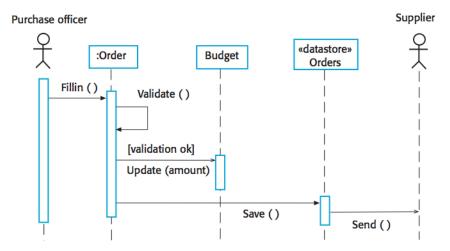


Figure 3.3: Sequence Diagram

Small description about above diagram.

# 3.4 Methodology/Procedures(your approach to solve the problem)

List to list all methodologies that you found during literature survey. Explain all algorithms that will be use in your project.

In this section all algorithms or any other implementation procedure need to explain with proper flow.

describe every procedure or algorithm with necessary diagram.

also explain different technology or languages you used for implementation/Deployment.

Table 3.1: Your first table.

Value 1	Value 2	Value 3
$\alpha$	$\beta$	$\gamma$
1	1110.1	a
2	10.1	b
3	23.113231	c

Table 3.2: Nonlinear Model Results

Table 5.2. Nonlinear Model Results			
Case	Method#1	Method#2	Method#3
1	50	837	970
2	47	877	230
3	31	25	415
4	35	144	2356
5	45	300	556

### 3.4.1 Procedures

Some mathematical formulae

$$x^n + y^n = z^n$$

Multiple integrals.

 $\iint_{V} \mu(u,v) \, du \, dv$ 

Sum sand products

 $Sum\sum_{n=1}^{\infty} 2^{-n} = 1$  inside text

$$\sum_{n=1}^{\infty} 2^{-n} = 1$$

$$\binom{n}{k} = \frac{n!}{k!(n-k)!}$$

When displaying fractions in-line, for example  $\frac{3x}{2}$  you can set a different display style:  $\frac{3x}{2}$ . This is also true the other way around

$$f(x) = \frac{P(x)}{Q(x)}$$
 and  $f(x) = \frac{P(x)}{Q(x)}$ 

# Chapter 4

# Results & Discussions

Contents of this chapter must contain algorithms or pseudo codes and results with discussion.

# 4.1 Implemented Algorithm's Psudo-code

FUNCTION linearSearch(list, searchTerm): FOR index FROM  $0 \rightarrow length(list)$ : IFlist[index] == searchTermTHEN RETURNindex ENDIF ENDLOOP RETURN - 1 ENDFUNCTION

### 4.2 Results



Figure 4.1: Basic Result snapshot

# 4.3 Discussion-Comparative study/Analysis

left	centered	right	a fully	
			justified	
			para-	
			graph	
			cell	
l	c	r	р	

# Chapter 5

# Conclusion

The proposed system was developed taking in mind the benefits of the employees and organization. In this work i presented a framework for modeling the behaviour of Android applications and verifying their compliance w.r.t. a security policies. Furthermore, i applied this method to a specific context, i.e., securing BYOD-based virtual organisations, and we detailed the features of a prototype under implementation. The developed system is based on open source APIs, due to this cost matrix is reduce. It is more benificial to organization such as small scale companies to adapt this system. Using SAML xACML technology for security policy, i achieve basic but a complete security framework. In the result we can clearly observe that the system not only adapt organization needs but also user friendly system which keep personal data untouched by organization.

# Appendix

Detailed information, lengthy derivations, raw experimental observations etc. are to be presented in the separate appendices, which shall be numbered in Roman Capitals (e.g. "Appendix I"). Since reference can be drawn to published/unpublished literature in the appendices these should precede the "Literature Cited" section.

# Bibliography

- [1] Alessandro Armando, Gabriele Costa, Alessio Merlo, Bring Your Own Device, Securely, *Proceedings of the 28th Annual ACM Symposium on Applied Computing*, ACM New York, NY, USA, pp. 1852-1858 March 2013.
- [2] Rebecca Copeland, Noel Crespi, Analyzing Consumerization Should Enterprise Business Context Determine Session Policy?, 2012 IEEE Proceedings of 16th International Conference on Intelligence in Next Generation Networks (ICIN), pp.187-193, 2012.
- [3] Prashant Kumar Gajar, Arnab Ghosh, Shashikant Rai,BRING YOUR OWN DEVICE (BYOD): SECURITY RISKS AND MITIGATING STRATE-GIES Proceedings of Journal of Global Research in Computer Science, Volume 4, No.4, April 2013.
- [4] Sean Chung, Sam Chung, Teresa Escrig, Yan Bai, Barbara Endicott-Popovsky, 2TAC: Distributed Access Control Architecture for "Bring Your Own Device" Security, proceeding of the International Conference on BioMedical Computing, 2012.
- [5] Dennis Titze, Philipp Stephanow, Julian Schutte, 'A Configurable and Extensible Security Service Architecture for Smartphones,' *IEEE Transactions on 27th International Conference on Advanced Information Networking and Applications Workshops*, 2013.
- [6] Dae Hyeob Kim, Ji Hoon Gong, Won Hyung Park, Neo Park, 'Vulnerability of Information Disclosure in Data Transfer Section for Safe Smartwork Infrasturucture', *IEEE transaction on International Conference on Information Science and Applications (ICISA)*, 2013, pp. 1 3, 24-26 June 2013.
- [7] Dennis Gessner, Joao Girao, Ghassan Karame, Wenting Li 'Towards a User-Friendly Security-Enhancing BYOD Solution' *Proceedings of the NEC technical journal*, Vol.7 No.3/2013.
- [8] Hanay, Y.S., Wolf, T., 'Techniques for Policy Enforcement on Encrypted Network Traffic', Proceedings of the Military Communications Conference, 2009. MILCOM 2009. IEEE, PP. 1-7,2009.
- [9] Ioannis Koskosas, 'A Short Literature Review in Information Systems Security Approaches,' *Proceeding of the IJAKECS*, Vol.1 No.1,pp.1-7, January- June 2013.

- [10] Antonio Scarfò, 'New security perspectives around BYOD' *IEEE Transactions* Seventh International Conference on Broadband, Wireless Computing, Communication and Applications, Page(s): 446-451,2012
- [11] Mohammad Nauman, Sohail Khan, Xinwen Zhang, 'Apex: Extending Android Permission Model and Enforcement with User-defined Runtime Constraints', ASIACCS '10 Proceedings of the 5th ACM Symposium on Information, Computer and Communications Security, Pages 328-332,2010
- [12] Ionut Andronache, Claudiu Nisipasiu, 'Web Single Sign-On Implementation SimpleSAMLphp Application', Journal of Mobile, Embedded and Distributed Systems, vol. III, no. 1, 2011

# Publication by Students

Paper entitled "An Intelligent Traveling Companion For Visually Impaired Pedestrian" is presented at *International Conference on Circuits, Systems, Information and Communication Technology Applications (CSCITA - 2014)*, In collaboration with IEEE Bombay Section, Mumbai with the approval of IEEE, USA.

# Annexure

# An Intelligent Traveling Companion For Visually Impaired Pedestrian

Richard F. Joseph

Dept. of Computer Engineering Sardar Patel Institute of Technology Mumbai, India richard.spit2012@gmail.com Anand A. Godbole
Dept. of Computer Engineering
Sardar Patel Institute of Technology
Mumbai, India
anandspce@yahoo.com

Abstract-A navigation system that will guide the blind and the visually impaired pedestrian with ease. The system will adapt to the user's behavior and will also provide the user with shortest path from the source to the user's chosen destination in the building. RFID technology is used to track the user's current location. The user carries his own PDA with the application installed in it and a RFID reader with him. RFID tags are deployed in the building. On detection of the RFID tag by the RFID reader as the reader comes in vicinity of the tag, the reader sends the tag information to the PDA using Bluetooth Technology. The PDA based user device provides the user navigation instructions in an audio form and the user can also select the preferences provides by giving input in form of speech. The system will be a blend of Optimal Routing and Users Preference. The PDA consist of the ACO algorithm that will help in the optimization of A\* algorithm which will work as the prediction algorithm.

Keywords—ACO; A\* Algorithm; Adaptive; Evaporation; RFID; Weight Modifier

#### I. INTRODUCTION

Navigation is a very basic need of every individual. Every single person wants a way from the source to the destination that is safe, short, correct and free from obstacles. A person suffering from different disabilities such as visually impaired people have similar demands. Visually impaired people have to memorize each and every path, which is a very tedious task. They even cannot try out new paths as they lack the information about one.

Many systems are available in the market that supports outdoor navigation. These systems can interact with the visually impaired people by providing them with an output in form of audio and by taking input in the form of speech. The main technologies used in such systems are GIS, GPS, radar, ultrasonic, speech and RFID (Radio-Frequency Identification) technology. However, indoor navigation is restricted because of concrete walls as the GPS signals are blocked. Thus, GPS—based navigation system is no longer effective inside a building for the purpose of navigation.

RFID technology was taken into consideration to provide a solution for the problem associated with indoor navigation assistance. Meaningful placement of RFID tags in the indoor environment is very necessary to provide efficient navigation

to the blind. RFID technology is a method for remotely storing and retrieving data using devices called RFID tags and RFID Readers. There are two different types of tags namely, passive and active. Passive RFID tags lacks built in power supply and the active one has its own power supply. RFID tags can be deployed in locations that are important to the user. For RFID tag placement research done by Wong Siew Mooi, Tan Chong Eng and Nurul Huda bt. Nik Zulkifli [11] will be used.

Basically, the RFID tags are installed on all the important locations that the user might go through and at regular intervals, so that the user keeps getting the location data along the way. RFID reader that can communicate with the tags along their way and can read the tags data. The reader can read the tag id. Each tag has unique ID. Each time an RFID tag is detected, the reader retrieves the location information from the tag and the blind user's position is known to the algorithm.

The proposed system will not only guide the visually impaired person but will also get adapted to the likes and dislikes of the person. The system will guide the user through a path which will be according to the user's preference. To do this the system will use the Ant Colony Optimization (ACO) Technique to optimize the prediction algorithm to predict the path with respect to the user's needs.

Each time the users uses the system, a prediction will be made for the user. If the user takes up the predicted path, the trial will be recorded as a success else as a failure. This result of prediction and the actual result will be fed to the ACO to optimize the inputs to the prediction algorithm.

Basic Bayesian Prediction will be used along with ACO. Different types of ACO will be used like Max – Min ACO and Rank Based ACO. This result of ACO will help change the weights of the path that is given to A\* Algorithm. This will help the A\* algorithm to give the shortest path.

#### II. RELATED WORK

Research has been done to provide navigation information to the blind and visually-impaired users [2-9]. Most of these systems cover a wide range of functions but the final output are inconvenient for daily use because they are heavy and complex [2, 3, 5-8] or are robot-assisted [4], which is not a feasible to the users.

Ali and Nordin [5] developed a system in which a camera attached to the cane identifies the surroundings for the blind person. While the proposed system has the disadvantages of requiring retrofitting of an existing aid for the blind along with leading to high response time.

Bourbakis [6] introduces a system equips the user with a microphone, camera, range sensors and earphone and combines outputs from cameras and range sensors (laser beams) to represent the 3-D space surrounding a blind person. The paper raises concerns about the battery life of 2-D vibrational arrays as well as replacing the laser sensors by other less dangerous sensors.

Fallah [7] develops the AudioNav system that uses a dead reckoning technique for indoor localization over a 3-D map of the building. The disadvantage of dead reckoning is that errors increase with time leading to high localization errors.

Chumkamon et al. [8] use RFID technology embedded in the floor along with a RFID antenna built–in the cane. Large response time to the client which is dominated by the communication delay with the server through the GPRS cellular network.

#### III. THE PROPOSED SYSTEM

As mentioned below, the system contains hardware and software. The hardware device works unidirectional in the range of 5-10 meters. This hardware is chosen to implement the concept of "Bring Your Own Device (BYOD)". These devices have been chosen because of these features which facilitate achieving the purpose of the system.

#### A. Components Of The System

#### 1) Hardware Component

- a) RFID Tags: The UHF RFID tags are deployed in the building. These tags have a unique ID and have an operating frequency of 433 Mhz, having a moderate data speed with a range of 1-100 m.
- b) RFID Reader: The UHF RFID Reader is carried by the user along with the PDA. The reader detects the tags as the reader comes in the vicinity of the tags. The reader has an operating frequency of 433 Mhz, having a moderate data speed with a range of 1-100m.
- c) Bluetooth Module: Bluetooth technology is integrated with the RFID reader to send the RFID tag id to the PDA on detection of RFID tag.

#### 2) Software Component

- a) Android Operating System: The application will be developed in android operating system as most of the people use android. Other operating systems can also be used, but looking at the popularity Android Jelly Beans 4.2 is used as the base for developing the application.
- b) SQLite Database: SQLite 3.0 can be used as a database to store the details of the environment and the behavior of the user. The floor plan with all the details is also stored in the database. This database is installed in the PDA along with the application.

#### 3) Objectives of the System:

- To provide the user with good response time.
- The device will have a better battery life as it is dependent on the PDA that the pedestrian uses.
- The user will get a handy device that will be small in size and easily portable.
- To provide the user with a device that will train it to adapt to user's needs and behavior.
- The input and output to the system will be in audio format.
- To enhance A\* algorithm to provide the shortest route to the pedestrian along with the preferences of the pedestrian with the help of ACO algorithm.

#### B. System Architecture

The system architecture has the main component as Guiding System which has the algorithm that brings about a change in the inputs of A\* algorithm with the help of the ACO algorithm.

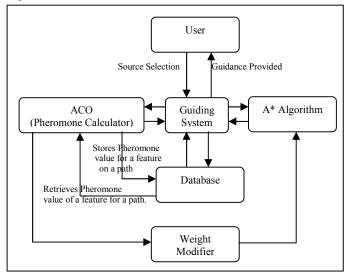


Fig. 1. System Architecture.

There are 6 important components in this system. The components are explained as follows:

- 1) User: The user only gives the destination and chooses the alternatives that are provided by the system. The user interacts with the system in audio format. The speech of the user is taken as input to the system and the guidance to the user is also provided by the means of audio.
- 2) Guiding System: The system gives the direction to the user for the path that is generated by the A\* algorithm. The guiding system just navigates the user from one tag to another to reach the destination. The guiding system detects the tags in the path and is able to determine the current location of the user w.r.t. the path. The guiding system records the user's preference and the path taken by the user in the database.

3) Ant Colony Optimizer Module (Pheromone Calculator): The ACO module extracts the features from the path taken up by the user which is stored in the database. The research done by Samir ALLACH, Mohammad ESSAAIDI and Mohamed BEN AHMED [10] is taken as the base in this paper. The ACO module works on the success and the failure of the predicted path to allocate the pheromone to the particular feature. If a success is recorded in the database for a particular path then those features are given higher pheromone value. It just shows that the feature is repeatedly used by the user. If a failure is recorded in the database for a particular path then those features are given lower pheromone value. It just shows that the feature is not in use by the user for a long

The fact of evaporation of the natural pheromone over time is extremely important because it helps the ant colony to rely on the constantly updated information. In our artificial system, it helps the system to be globally dynamic than being locally static with the help of evaporation.

Each pedestrian who travels through the path on the floor plan (network) is represented as an "ant", a micro-agent. The ant releases pheromones. If the use is successfully validated, the pheromones will be those of success (S); otherwise, they will be of Failure (F). Therefore each path will carry, in addition to W (Weight of the Path), the two values S and F.

$$S_t = \tau^x S_{t-1} \tag{1}$$

Equation (1) gives the form of evaporation for the pheromones of success S (the equation is the same for F): t, the rate of evaporation, is a key parameter of the system. The period of evaporation x that says how often the evaporation is calculated is a constant learning. "x" can be taken in days and the value of "t" can range from 0 to 1.

The variable H (Personal History) belongs to each pedestrian, and bears information of traversed paths. Each time a path is validated, a history variable H, specific to pedestrian is created and stored in database and set to h1 = 0.5 if it is a success, to h2 = 0.75 if it is a failure. This value will be later used as multiplicative factor to reduce the probability to visit that node again. When it eventually happens, H is again multiplied by h1 or h2. Just like S and F, H evaporates and tends to go back to 1 with time, following:

$$H_t = H_{t-1} \left( 1 + \frac{1 - H_{t-1} \cdot 1 - e^{-\tau x}}{H_{t-1} \cdot 1 + e^{-\tau x}} \right)$$
 (2)

Where  $\tau$  is a constant used to tune the evaporation speed and  $\varkappa$  is the amount of time elapsed since the last visit to that path.  $\tau$  should be calibrated to correspond to the volatility of the pedestrian's memory:

$$\tau = \frac{1}{r} \ln \left( \frac{1+\alpha}{1-\alpha} \right) \tag{3}$$

With

$$\alpha = \frac{H_{t} - H_{t-1}}{1 - H_{t-1}} \tag{4}$$

Provided one defines what "forgetting the elements on the path" means, for instance if its H value, from  $H_{t\text{-}1}=0.5$  (one visit with success), grows back to  $H_t$ = 0.9, this gives  $\alpha{\approx}0.8$  and a team then only has to estimate the time it takes to "forget the elements on the path": one week for example (x = 604800sec.) gives  $\tau$ = 3.6E -6.

Fitness calculation takes place on each of the path in the network:

$$f(\alpha) = H.(\omega_1 W + \omega_2 S - \omega_3 F) \tag{5}$$

This value unifies in a weighted average all the factors that make a path "desirable" or not: *f* is high when:

- The path's ending node was last visited a long time ago (H is close to 1).
- The path is encouraged by user's choice (high W).
- People have succeeded a lot at a node (high S).
- People have failed a less around the path (low F)
- 4) A\* Algorithm: A\* algorithm works along the principle of heuristic and best path till the current node on the path. It traverses the network; it follows a path of the lowest expected total cost or distance, keeping a sorted priority queue of alternate path segments along the way. The cost function is a sum of two functions:
- a) The past path-cost function: It is the known distance from the starting node to the current node x (usually denoted g(x)).
- b) A future path-cost function: It is an admissible "heuristic estimate" of the distance from x to the goal (usually denoted h(x)).

The h(x) part of the f(x) must not overestimate the distance to the goal. Thus, for an application like routing, h(x) might represent the straight-line distance to the goal, since that is physically the smallest possible distance between any two nodes.

If the heuristic h satisfies the additional condition  $h(x) \le d(x, y) + h(y)$  for every path (x, y) of the network (where d denotes the length of that path), then his called monotone, or consistent. In such a case,  $A^*$  can be implemented more efficiently—roughly speaking, no node needs to be processed more than once — and  $A^*$  is equivalent to running Dijkstra's algorithm with the reduced cost d'(x, y) := d(x, y) - h(x) + h(y).

In this case, the weights (cost for going from one point to another) will change as per the inputs given by weight modifier. A\* algorithm will ignore the path with higher weights (paths having low pheromone level). Research done by Ma Changxi, Diao Aixia, Chen Zhizhong and Qi Bo [1] is used in this paper to make the A\* algorithm behave as the prediction algorithm.

5) Weights Modifier: The weights of the path having the particular feature are changed depending on the pheromone level of the featured assigned to it by the ACO. The Weight Modifier takes the data from the database related to the

extracted features from the path chosen by the user. We have taken following features to be considered for user's choices that can result into weight modification of paths containing them

- Elevators vs Stairs
- Crowded Lanes vs Deserted Lanes
- Wide Lanes vs Narrow Lanes
- Hand Rails vs Guard Rails
- *6) Database: The database consist of the following:* 
  - Logs of the user.
  - Floor plan.
  - The feature location on the floor plan.
  - The path taken by the user and the details.
  - The count of features taken up by user.
  - The weights of the paths.

#### C. Flow Of the Proposed System

In the flow of the proposed system consist of ACO algorithm and A\* Algorithm. Here the ACO used is Rank Based ACO as it will always try and provide the user with all the preferences and also the shortest path.

The flow of the system presented in Fig. 2 shows the flow of the user when he uses the system and also the internal functioning of the system that the user is not aware of. The flow is explained as follows:

- *1) Initialization:* All the paths in the building are initialized to infinity.
- 2) Destination selection: The user enters the destination using the voice input into the system.
- *3) Source detection:* The source is not entered by the user. The source is automatically detected as soon as the RFID tag comes in proximity of the device.
- 4) A\* algorithm: Shortest Path gets formulated from the source to the destination using the A\* algorithm.
- 5) Feature presentation: The user is presented with all the key features of the path that the system feels are necessary for the user to know beforehand. These features are the parameters on which the user's preferences are evaluated.
- *6) User guidance:* User is guided along the path with the help of RFID tags.
- 7) Providing alternatives: Throughout the path the user is suggested with alternatives that he can take up to reach the destination along with the key features of the alternatives.
- 8) Users decision: It is up to the user to take up the alternative
- a) Alternative selected: If the user takes up the alternative.

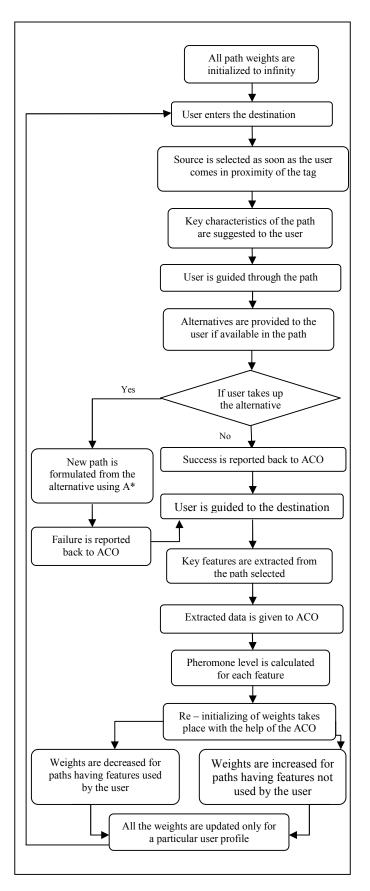


Fig. 2. Flow of the Proposed System.

- Dynamically a shortest path gets formulated from the alternative to destination using A\* algorithm.
- Failure of the predicted path is given to the ACO algorithm for further improvements.
- b) Alternative Rejected: If the user does not take up the alternative.
  - Success of the predicted path is given to ACO algorithm for further improvements.
  - 9) Reaching destination: User is guided to the destination.
- 10) Feature extraction: Key features are extracted from the path taken up by the user from source to destination.
- 11) Sending features to ACO algorithm: All the extracted features with result of the prediction are passed to the ACO algorithm.
- 12) ACO algorithm processing: ACO then calculates the pheromone level for each extracted feature. ACO algorithm gives higher pheromone value to features mostly taken up by the user.
- 13) Weight modification: Re initialization of the weights takes place with the help of the output given by the ACO algorithm.
- a) Weight decrement: Weights are decreased by a certain percentage for a path if the pheromone level for the features in that path is high. As pheromone level increases the weight decreases.
- b) Weight increment: Weights are increased by a certain percentage for a path if the pheromone level for the features in that path is low. As pheromone level decreases the weight increases.
- 14) Saving user profile: All these weights are adjusted for a particular user profile.
- 15) Next iteration: The network with the new weights is used for the user during his next iteration, when the user selects the new destination and the entire process is repeated again.

The A\* algorithm works as the predictor as it gives the path that suits the user's preferences. The algorithm is always provided with the same network but with different weights.

#### IV. TESTS AND EXPERIMENT

Simulations are made to obtain a comprehensive calibration of numerical parameters and to verify the system behavior in some particular cases.

In this simulation, we work on the data that is recorded for a particular user. The data is recorded for 50 instances at different times of a day and on different days.

#### A. Data of Simulation

Table – I shows the data recorded for each feature. The 5<sup>th</sup> column "Overall %" shows the percentage for each feature for all 50 instances i.e. for all the records from the time when the user used the system first. The 4<sup>th</sup> column "Pheromone %" shows the percentage for each feature with respect to success and failure. The percentage increase with the use of feature and decreases if the feature is not used

This particular data for 50 instances is recorded in the duration of 7 days. For this 50 instances when value of "x" (Evaporation Period) is taken as 2 days and "t" (Evaporation Rate) is taken as 0.5. Pheromone % is normally high if the feature is used recently i.e. within the evaporation period.

TABLE I. LOG FOR EACH PARAMETER

Parameters	Feature Provided (No of times): A	Opted For (No of Times): B	Pheromone %	Overall (A/B) * 100 %
Elevators	38	28	46.28	73.68
Stairs	42	4	32.67	9.52
Crowded				
Lanes	3	3	22.73	100.00
Deserted				
Lanes	14	2	8.34	14.29
Wide Lanes	27	5	37.26	18.52
Narrow Lanes	32	30	93.61	93.75
Hand Rails	46	21	84.12	45.65
Guard Lanes	3	1	2.46	33.33

The data in table – I presents us with the following observations:

- 1) Elevators: The percentage of use from the start is 73.68%, but the pheromone level is 46.28%. This shows that the particular user is not using the elevators recently.
- 2) Stairs: The percentage of use from the start is 9.52%, but the pheromone level is 32.67%. This shows that the particular user is using the stairs recently.
- *3) Crowded lanes:* The percentage of use from the start is 100%, but the pheromone level is 22.73%. This shows that the particular user is not moving about in crowded lanes recently.
- 4) Deserted lanes: The percentage of use from the start is 14.29%, but the pheromone level is 8.34%. This data doesn't show anything significant as the particular user is not using the deserted lanes much.
- 5) Wide lanes: The percentage of use from the start is 18.52%, but the pheromone level is 37.26%. This shows that the particular user is using the wide lanes recently.
- *6) Narrow lanes:* The percentage of use from the start is 93.75%, but the pheromone level is 93.61%. This shows that the particular user is using the narrow lanes regularly and recently.
- 7) Hand rails: The percentage of use from the start is 45.65%, but the pheromone level is 84.12%. This shows that the particular user is using the hand rails recently.
- 8) Guard rails: The percentage of use for guard rails from the start is 33.33%, but the pheromone level is 2.46%. This data clearly shows that the particular user is not using the guard rails much.

Weights of the paths containing these features decreases if the pheromone level increases and increases if pheromone level decreases. A simulation is done with the help of this data using PHP as the language and MySQL as the database.

In Fig. 3, the walls are represented in dark blue color, source is in green color and destination is in red color. Nodes that provide an alternative are represented as yellow and grey is

used to show the path from source to destination. The suggested path that takes the users preferences under consideration is marked with alphabet "p". Alternatives are suggested to the user when the user reaches the yellow node. Alternative path are marked using notations like A1, A2, A3 and so forth. In Fig. 3, the user is suggested with a longer path as the user preferences are taken into consideration but the shorter path is also provided and suggested to the user in the form of audio, which is marked with "A1".

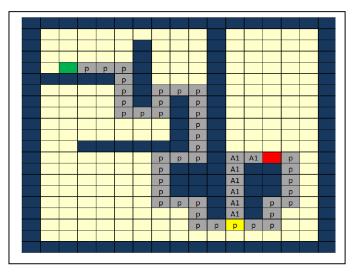


Fig. 3. Simulation of the Proposed System

If the user goes along the suggested path then the instance is noted as a success else as a failure. This result is given back to ACO for further optimization.

#### V. CONCLUSION

Hence the proposed system can adapt to the user's behavior and also provide the user with the shortest path to the destination. The system will provide the user with the following:

### A. Response Time

Here the data will be stored in the Smartphone and all the computation will be done in the Smartphone, so the performance depends on the performance of the Smartphone.

#### B. Battery Life

This attribute is not of much concern as it is an application that will run on any android based Smart phone.

#### C. Size

A small product that will communicate with the Smart phone. This product has to be carried by the user everywhere he goes.

#### D. Adaptivity

The system will learn from the users behavior and will provide a route that is shorter and as well as suites the users behavior.

#### E. Communication

The system will work with I/O (input/output) in speech and hence will be interactive.

Future work will consist of work on I/O of the system which doesn't needs internet access. Currently the system uses Google API for speech recognition in android that needs internet connection.

#### REFERENCES

- [1] Ma Changxi, Diao Aixia, Chen Zhizhong, Qi Bo, "Study on the hazardous blocked synthetic value and the optimization route of hazardous material transportation network based on A-star algorithm", Seventh International Conference on Natural Computation, IEEE 2011.
- [2] D. Ross and B. Blasch, "Development of a Wearable Computer Orientation System", In Personal and Ubiquitous Computing, 6:1, pp. 49-63, 2002.
- [3] S. Willis, S. Helal, "RFID Information Grid for Blind Navigation and Wayfinding", Proceedings of the 2005 Ninth IEEE International Symposium on Wearable Computers, 2005.
- [4] V. Kulyukin et al. "RFID in Robot -Assisted Indoor Navigation for the Visually-impaired", Proceedings of the IEEE International Conference on Intelligent Robots and Systems, October 2004.
- [5] A.M. Ali, M.J. Nordin, "Indoor navigation to support the blind person using weighted topological map", International Conference on Electrical Engineering and Informatics, 2009.
- [6] N. Bourbakis, "Sensing Surrounding 3-D Space for Navigation of the Blind", IEEE Engineering in Medicine and Biology Magazine, Volume: 27, Issue: 1 pp 49 – 55, Jan.-Feb. 2008.
- [7] N. Fallah, "AudioNav: a mixed reality navigation system for individuals who are visually impaired", ACM SIGACCESS Accessibility and Computing, Issue 96, pp. 24-27, January 2010.
- [8] S. Chumkamon, P. Tuvaphanthaphiphat, P. Keeratiwintakorn, "A blind navigation system using RFID for indoor environments," 5<sup>th</sup> International Conference on Electrical Engineering/Electronics, Computer, Telecommunications and Information Technology, ECTICON 2008., vol.2, pp.765-768, May 2008.
- [9] Aura Ganz, IEEE Fellow and Siddhesh Rajan Gandhi and Carole Wilson, Gary Mullett, "INSIGHT: RFID and Bluetooth Enabled Automated Space for the Blind and Visually Impaired", Annual International Conference of the IEEE on Engineering in Medicine and Biology Society (EMBC), 2010.
- [10] Samir ALLACH, Mohammad ESSAAIDI, Mohamed BEN AHMED, "A new approach of elearning-adaptive based on ant colonies optimization algorithm", IEEE International Conference on Multimedia Computing and Systems (ICMCS), IEEE 2012.
- [11] Wong Siew Mooi, Tan Chong Eng, Nurul Huda bt. Nik Zulkifli, "Efficient RFID Tag Placement Framework for In Building Navigation System for the Blind", 8th AsiaPacific Symposium International Conference on Information and Telecommunication Technologies (APSITT), IEEE 2010.

### Acknowledgement

We wish to express our sincere gratitude to **Dr. Sanjay U. Bokade**, **Principal** and **Dr. Satish. Y. Ket**, **H.O.D.** of Department Computer Engineering of Rajiv Gandhi Institute of Technology for providing us an opportunity to do our project work on "(**Project Title**)".

This project bears on imprint of many peoples. We sincerely thank our project guide Mr/Mrs. (Guide Name) for his/her guidance and encouragement in carrying out this synopsis work.

Finally, we would like to thank our colleagues and friends who helped us in completing project work successfully

- 1. ABC(name of the student)
- 2. PQR(name of the student)
- 3. XYZ(name of the student)