



≥8 Million
Movement Life



6-8 Pairs
Infra Red



Illegal Intrusion
Infrared Alarm




DC Brushless Motors
Fully Automatic Clutch



Auto Self Inspection
& Alarm Prompt



Negligible
Maintenance

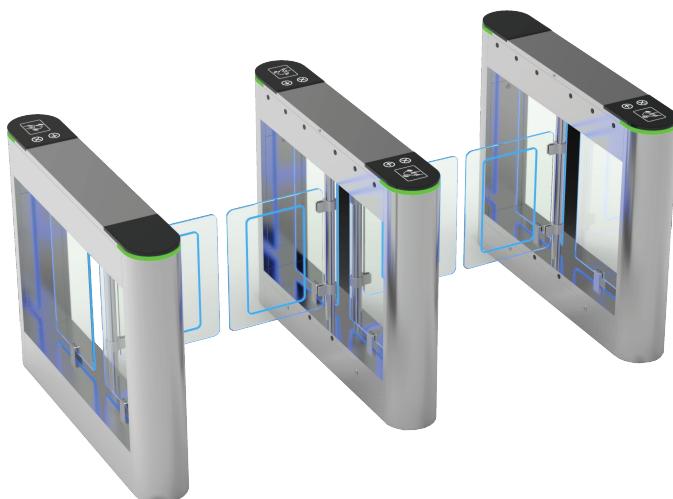

Full Automatic Swing Gate

TWLD-SG2600/TWLD-SG2602

TWLD-SG2600 / TWLD-SG2602 is a fully AUTOMATIC SWING GATE BARRIER powered by a 24V brushless DC motor. It supports multiple access modes, including card swiping, face recognition, fingerprint verification, infrared induction automatic opening and button opening.

The device features accurate identification technology along with advanced safety functions such as wrong entry and forced entry infrared alarms. It ensures fast, efficient, and secure access control, offering a user-friendly and highly convenient experience.

- It features fault self-inspection and alarm prompts, along with an inbuilt voice prompt function, making it convenient for users to maintain and operate.
- Infrared alarm triggers in case of unauthorized or wrong entry.
- It includes an automatic reset function: if no passage occurs within the specified time after the gate opens, the system will automatically cancel the user's access permission. The default reset time is 3 seconds after gate opening.
- Equipped with audible and visual alarm functions for situations such as illegal intrusion, tailgating, and gate closure.
- Uses high-quality infrared sensors with high light resistance, capable of withstanding up to 1,00,000 lux of light intensity, with a resistance time of 6°C.
- Allows only one person to pass at a time, with anti-tailgating and anti-collision features.



(+91)-11-41916615
+91-95999-53923



D-162, Okhla Industrial Area
Phase I, New Delhi, 110020




sales@timewatchindia.com
www.timewatchindia.com

Specifications

| | |
|------------------------|--|
| Dimension | 1200(L) x 200(W) x 980(H)mm |
| Material Structure | SS 304 Stainless steel + Acrylic |
| Channel Width | Standard 600mm (\leq 900mm Can be customized) |
| Motor | 24V brushless DC motor, low noise |
| Traffic Direction | One-way/two-way traffic |
| Running speed | 0.5~0.8s |
| Opening mode | Biometric identification, Card, remote control switch, etc |
| Lifetime | \geq 8 million times |
| Infrared quantity | 6-8 pairs |
| Power | 40-60w |
| Applicable temperature | -20°C~70 °C |
| Support | Indoor and outdoor use |

Dimension Drawing

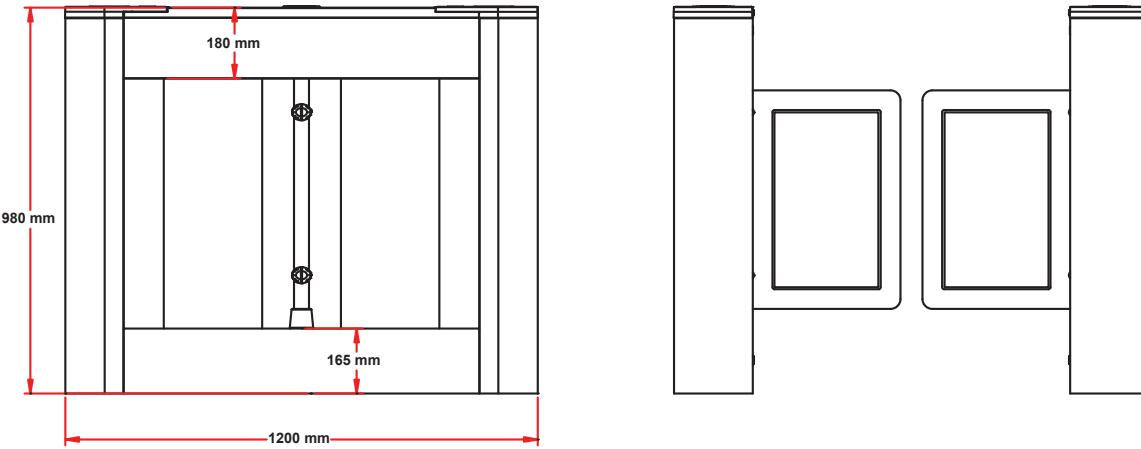

 **Head Office :** D-162, Okhla Industrial Area Phase I,
New Delhi, 110020.

 **Regional Office :** Mumbai, Bengaluru, Ahmedabad,
Chennai, Kolkata.

International Office : Dubai

Disclaimer : All pictures shown are for illustration purposes only. The actual product and color may vary due to product enhancement. The brief specification is mentioned and may change without prior notice. Please consult us before placing any order.